


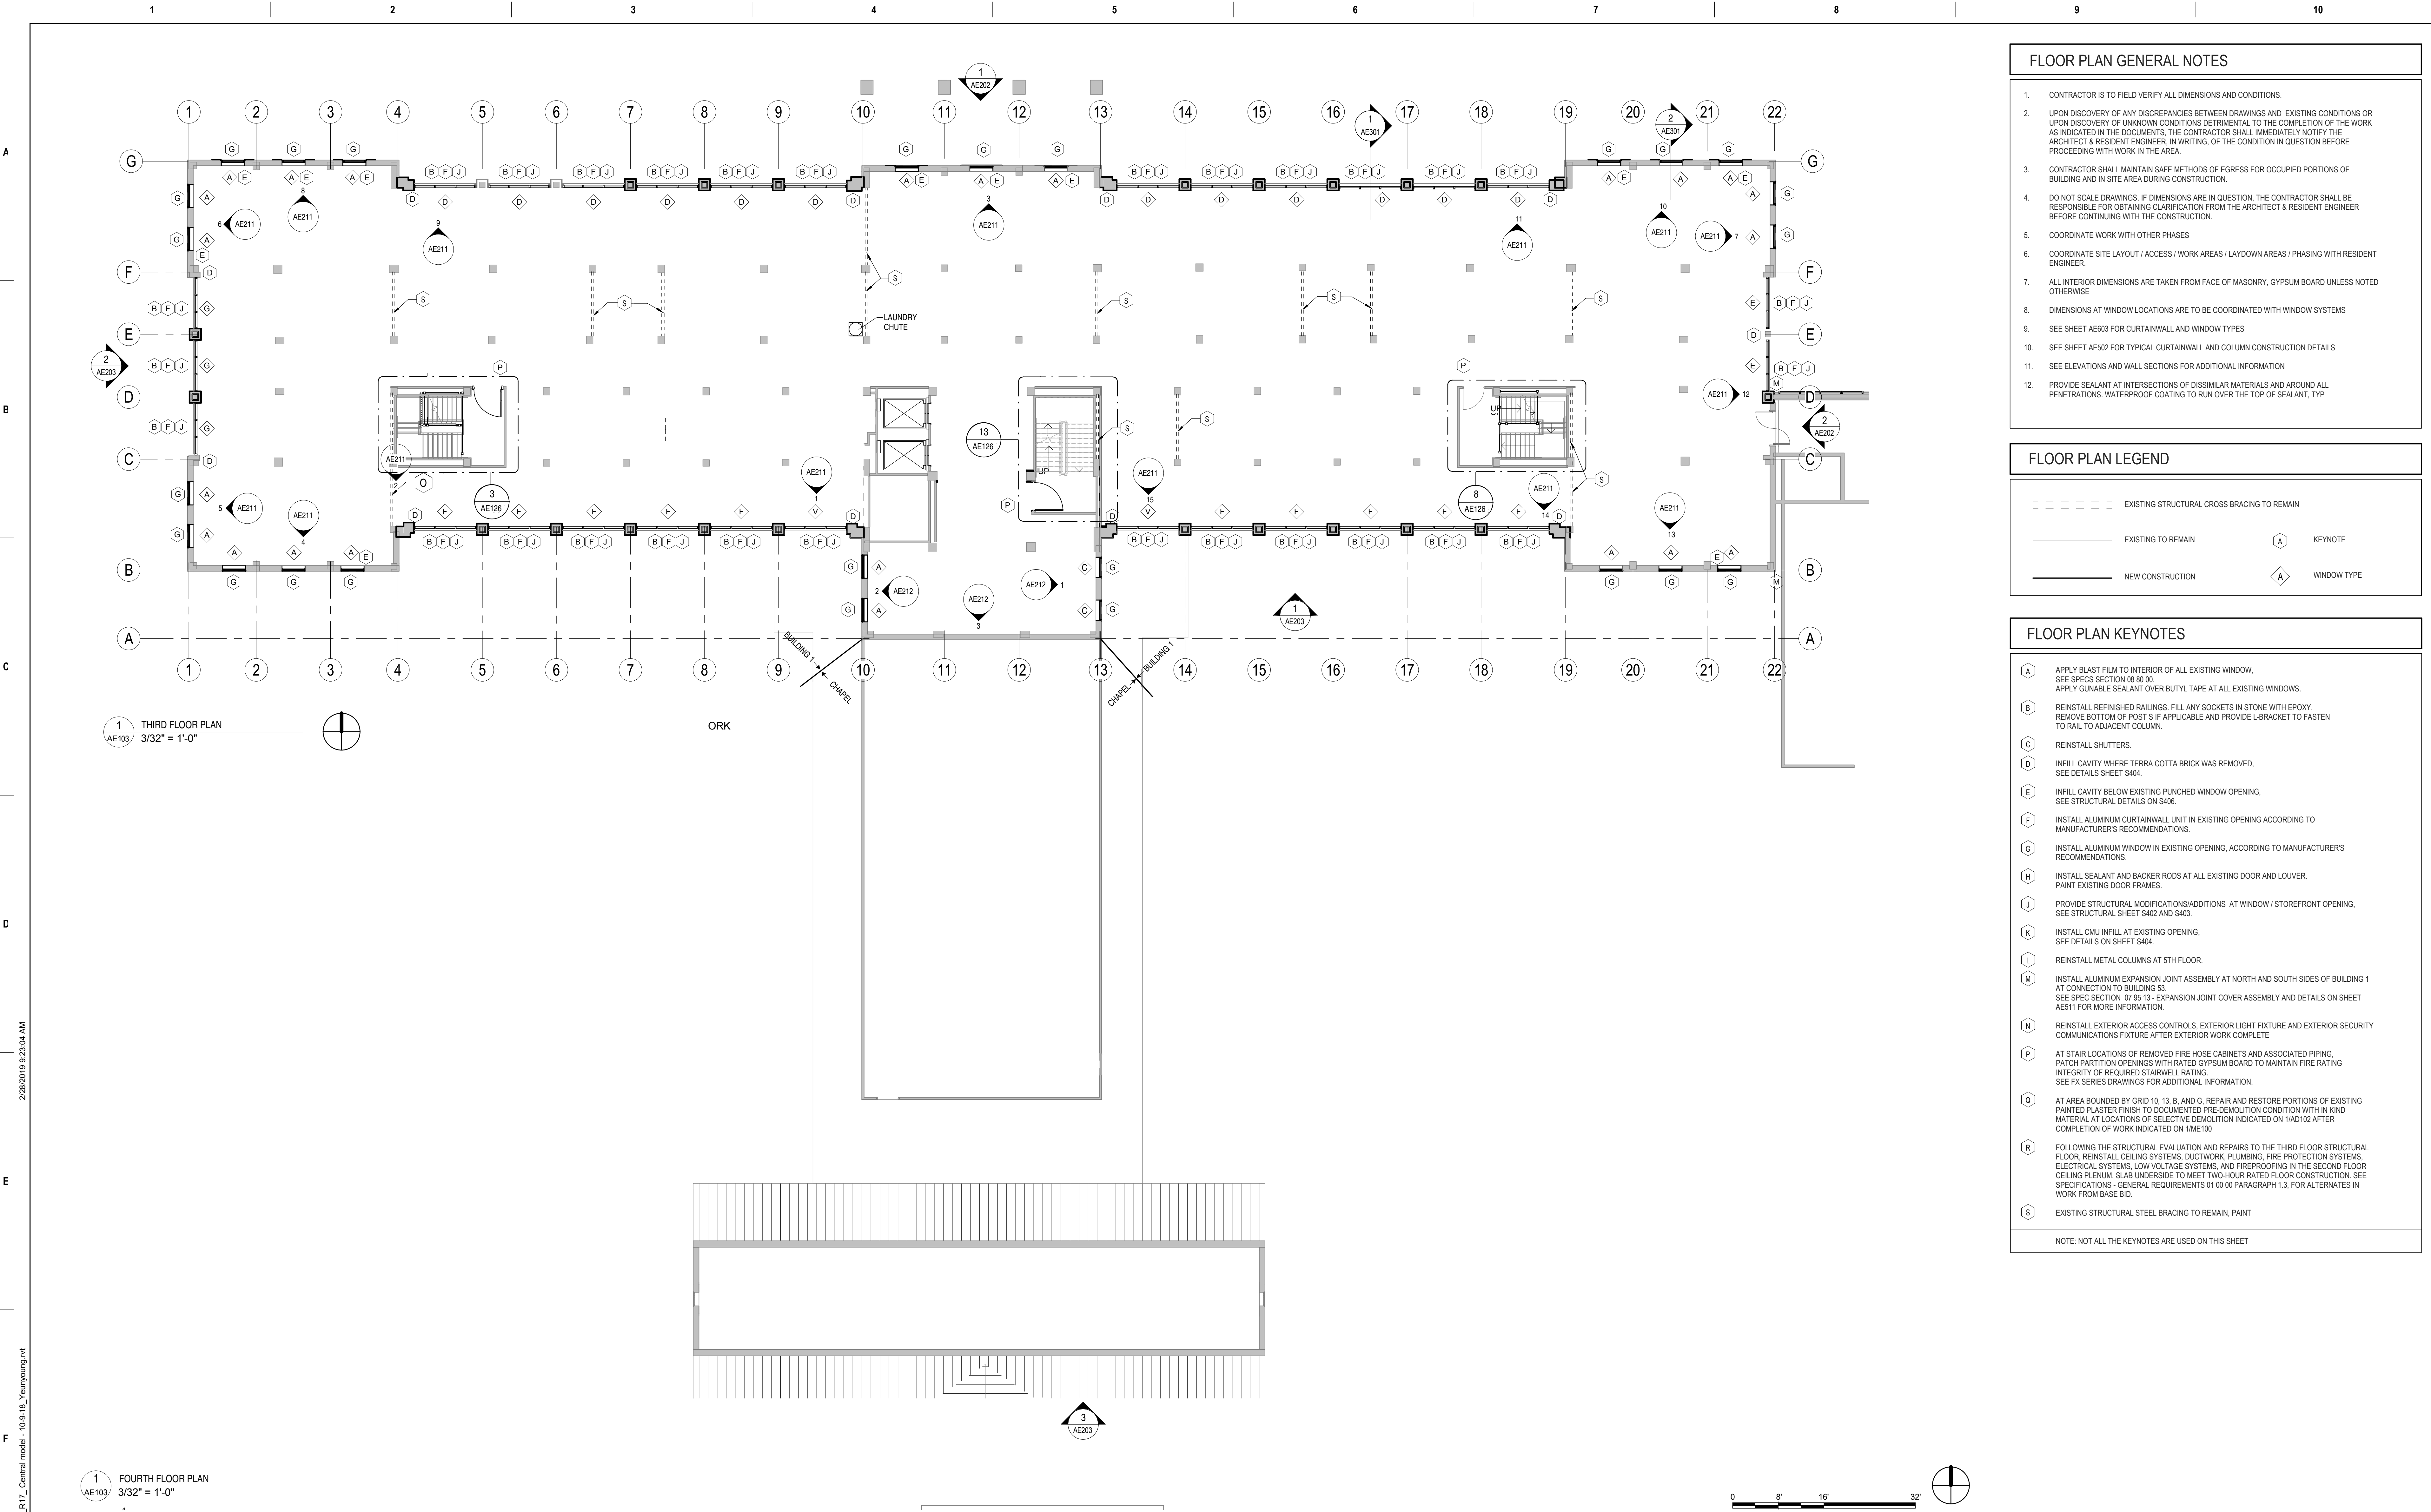

FLOOR PLAN GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETERMINAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT & RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THE AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDING AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE ARCHITECT & RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- COORDINATE WORK WITH OTHER PHASES
- COORDINATE SITE LAYOUT / ACCESS / WORK AREAS / LAYDOWN AREAS / PHASING WITH RESIDENT ENGINEER.
- ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF MASONRY, GYPSUM BOARD UNLESS NOTED OTHERWISE
- DIMENSIONS AT WINDOW LOCATIONS ARE TO BE COORDINATED WITH WINDOW SYSTEMS
- SEE SHEET AE603 FOR CURTAINWALL AND WINDOW TYPES
- SEE SHEET AE502 FOR TYPICAL CURTAINWALL AND COLUMN CONSTRUCTION DETAILS
- SEE ELEVATIONS AND WALL SECTIONS FOR ADDITIONAL INFORMATION
- PROVIDE SEALANT AT INTERSECTIONS OF DISSIMILAR MATERIALS AND AROUND ALL PENETRATIONS. WATERPROOF COATING TO RUN OVER THE TOP OF SEALANT, TYP

FLOOR PLAN LEGEND

EXISTING STRUCTURAL CROSS BRACING TO REMAIN

EXISTING TO REMAIN

NEW CONSTRUCTION

A

KEYNOTE

A

WINDOW TYPE

FLOOR PLAN KEYNOTES

A

APPLY BLAST FILM TO INTERIOR OF ALL EXISTING WINDOW.
SEE SPEC SECTION 08 00 00
APPLY GUNABLE SEALANT OVER BUTYL TAPE AT ALL EXISTING WINDOWS.

B

REINSTALL REFINISHED RAILINGS. FILL ANY SOCKETS IN STONE WITH EPOXY.
REMOVE BOTTOM OF POST S IF APPLICABLE AND PROVIDE L-BRACKET TO FASTEN TO RAIL TO ADJACENT COLUMN.

C

REINSTALL SHUTTERS.

D

INFILL CAVITY WHERE TERRA COTTA BRICK WAS REMOVED.
SEE DETAILS SHEET S404.

E

INFILL CAVITY BELOW EXISTING PUNCHED WINDOW OPENING.
SEE STRUCTURAL DETAILS ON S408.

F

INSTALL ALUMINUM CURTAINWALL UNIT IN EXISTING OPENING ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.

G

INSTALL ALUMINUM WINDOW IN EXISTING OPENING, ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.

H

INSTALL SEALANT AND BACKER RODS AT ALL EXISTING DOOR AND LOUVER.
PAINT EXISTING DOOR FRAMES.

J

PROVIDE STRUCTURAL MODIFICATIONS/ADDITIONS AT WINDOW / STOREFRONT OPENING.
SEE STRUCTURAL SHEET S402 AND S403.

K

INSTALL CMU INFILL AT EXISTING OPENING.
SEE DETAILS ON SHEET S404.

L

REINSTALL METAL COLUMNS AT 5TH FLOOR.

M

INSTALL ALUMINUM EXPANSION JOINT ASSEMBLY AT NORTH AND SOUTH SIDES OF BUILDING 1 AT CONNECTION TO BUILDING 53
SEE SPEC SECTION 07 85 13 - EXPANSION JOINT COVER ASSEMBLY AND DETAILS ON SHEET AE511 FOR MORE INFORMATION.

N

REINSTALL EXTERIOR ACCESS CONTROLS, EXTERIOR LIGHT FIXTURE AND EXTERIOR SECURITY COMMUNICATIONS FIXTURE AFTER EXTERIOR WORK COMPLETE.

P

AT STAIR LOCATIONS OF REMOVED FIRE HOSE CABINETS AND ASSOCIATED PIPING, PATCH PARTITION OPENINGS WITH RATED GYPSUM BOARD TO MAINTAIN FIRE RATING. INTEGRITY OF REQUIRED STAIRWELL RATING.
SEE FX SERIES DRAWINGS FOR ADDITIONAL INFORMATION.

Q

AT AREA BOUNDED BY GRID 10, 13, B, AND G, REPAIR AND RESTORE PORTIONS OF EXISTING PAINTED PLASTER FINISH TO DOCUMENTED PRE-DEMOLITION CONDITION WITH IN KIND MATERIAL AT LOCATIONS OF SELECTIVE DEMOLITION INDICATED ON 1/ME102 AFTER COMPLETION OF WORK INDICATED ON 1/ME100

R

FOLLOWING THE STRUCTURAL EVALUATION AND REPAIRS TO THE THIRD FLOOR STRUCTURAL FLOOR, REINSTALL CEILING SYSTEMS, DUCTWORK, PLUMBING, FIRE PROTECTION SYSTEMS, ELECTRICAL SYSTEMS, LOW VOLTAGE SYSTEMS, AND FIREPROOFING IN THE SECOND FLOOR CEILING FLEXUM SLAB UNDERSIDE TO MEET TWO HOUR RATED FLOOR CONSTRUCTION. SEE SPECIFICATIONS - GENERAL REQUIREMENTS 01 00 00 PARAGRAPH 1.3, FOR ALTERNATES IN WORK FROM BASE BID.

S

EXISTING STRUCTURAL STEEL BRACING TO REMAIN, PAINT

NOTE: NOT ALL THE KEYNOTES ARE USED ON THIS SHEET

1

THIRD FLOOR PLAN
AE103
3/32" = 1'-0"

1

FOURTH FLOOR PLAN
AE103
3/32" = 1'-0"

0


8'

16'


32'

BID DOCUMENTS

Revisions: Date:		CONSULTANT	ARCHITECT/ENGINEER OF RECORD THOMAS OLESAK, ARCHITECT MS Lic # 5505 1050 HOYT AVE WEST ST PAUL, MN 55117 952-451-0460		STAMP Thomas Olesak 5505 03.10.2023	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title 3RD FLOOR PLAN - SHELL Approved:	Phase CONSTRUCTION DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE BUILDING 1	Project Number 520-317X Building Number 1
									Location BILOXI, MISSISSIPPI	Drawing Number AE103 Dwg. 61 of 238
									Issue Date 03/10/2023	Checked LA
									Drawn CD	

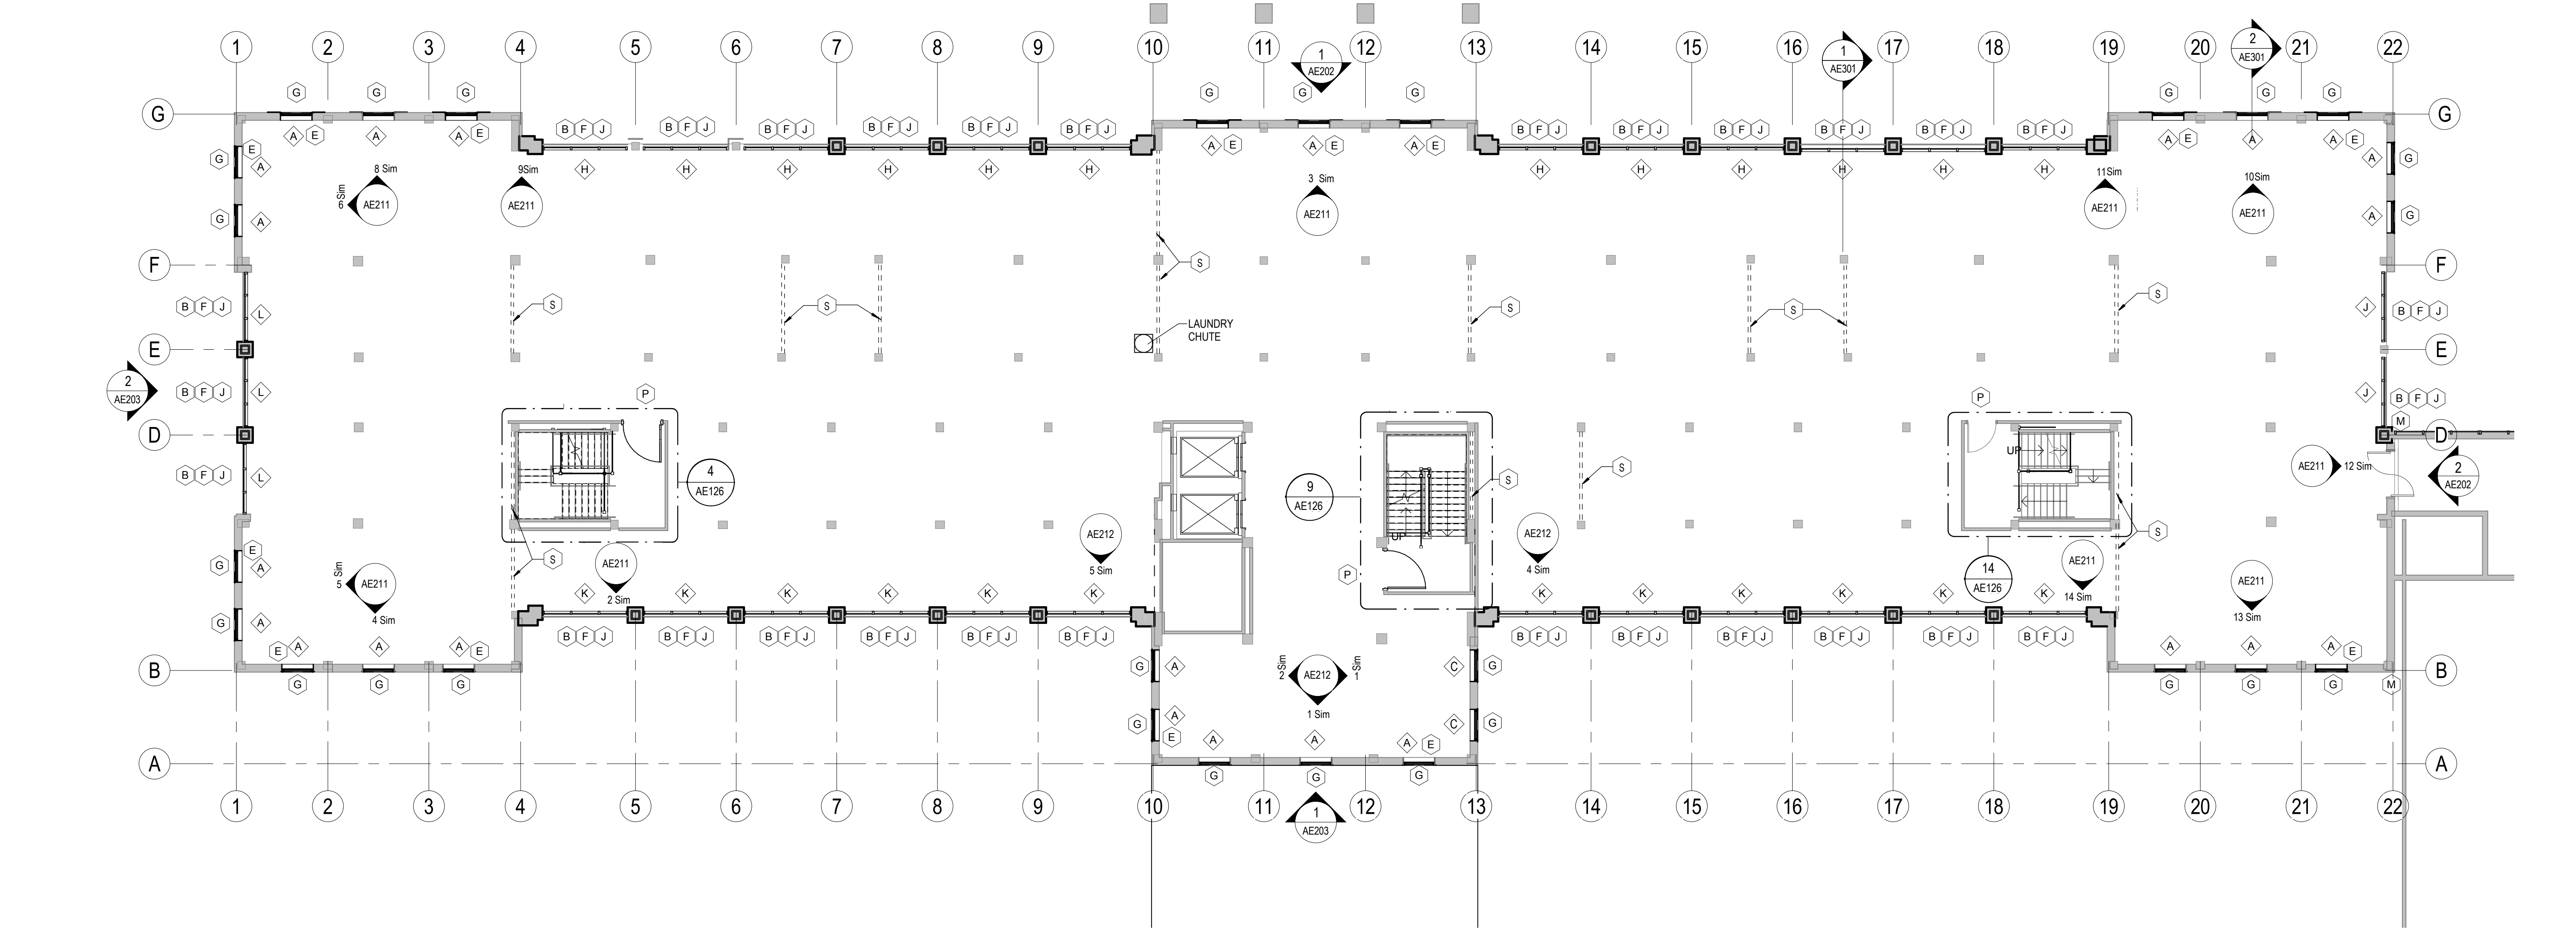

2 FOURTH FLOOR PLAN
3/32" = 1'-0"

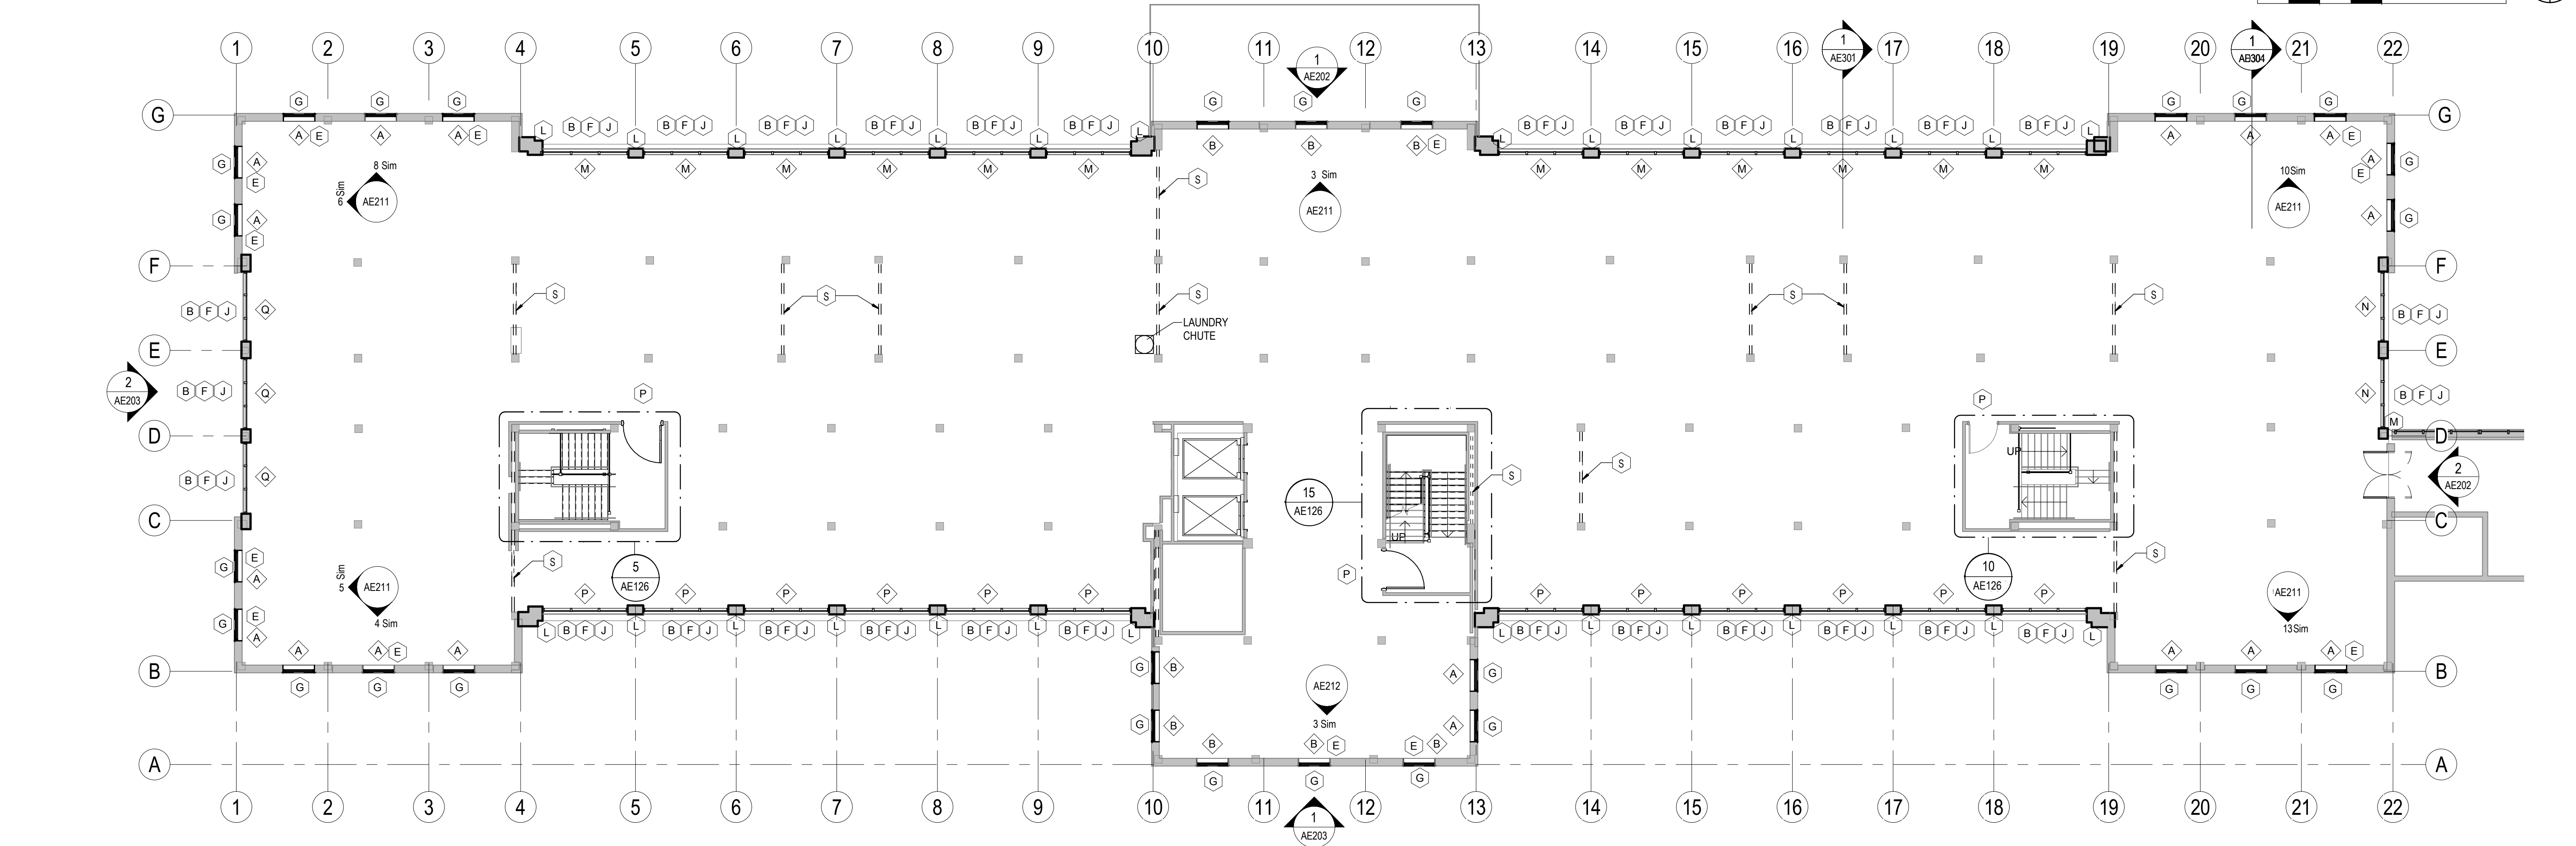

1 FIFTH FLOOR PLAN
3/32" = 1'-0"

FLOOR PLAN GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT & RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THE AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDING AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE ARCHITECT & RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- COORDINATE WORK WITH OTHER PHASES.
- COORDINATE SITE LAYOUT / ACCESS / WORK AREAS / LAYDOWN AREAS / PHASING WITH RESIDENT ENGINEER.
- ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF MASONRY, GYPSUM BOARD UNLESS NOTED OTHERWISE.
- DIMENSIONS AT WINDOW LOCATIONS ARE TO BE COORDINATED WITH WINDOW SYSTEMS.
- SEE SHEET AE603 FOR CURTAINWALL AND WINDOW TYPES.
- SEE SHEET AE502 FOR TYPICAL CURTAINWALL AND COLUMN CONSTRUCTION DETAILS.
- SEE ELEVATIONS AND WALL SECTIONS FOR ADDITIONAL INFORMATION.
- PROVIDE SEALANT AT INTERSECTIONS OF DISSIMILAR MATERIALS AND AROUND ALL PENETRATIONS. WATERPROOF COATING TO RUN OVER THE TOP OF SEALANT, TYP.

FLOOR PLAN LEGEND

- EXISTING STRUCTURAL CROSS BRACING TO REMAIN
- EXISTING TO REMAIN
- NEW CONSTRUCTION
- KEYNOTE
- WINDOW TYPE

FLOOR PLAN KEYNOTES


- APPLY BLAST FILM TO INTERIOR OF ALL EXISTING WINDOW. SEE SPEC SECTION 08 80 00. APPLY GUNABLE SEALANT OVER BUTYL TAPE AT ALL EXISTING WINDOWS.
- REINSTALL REFINISHED RAILINGS. FILL ANY SOCKETS IN STONE WITH EPOXY. REMOVE BOTTOM OF POST S IF APPLICABLE AND PROVIDE L-BRACKET TO FASTEN TO RAIL TO ADJACENT COLUMN.
- REINSTALL SHUTTERS.
- INFILL CAVITY WHERE TERRA COTTA BRICK WAS REMOVED. SEE DETAILS SHEET S404.
- INFILL CAVITY BELOW EXISTING PUNCHED WINDOW OPENING. SEE STRUCTURAL DETAILS ON S408.
- INSTALL ALUMINUM CURTAINWALL UNIT IN EXISTING OPENING ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.
- INSTALL ALUMINUM WINDOW IN EXISTING OPENING. ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.
- INSTALL SEALANT AND BACKER RODS AT ALL EXISTING DOOR AND LOUVER. PAINT EXISTING DOOR FRAMES.
- PROVIDE STRUCTURAL MODIFICATIONS/ADDITIONS AT WINDOW / STOREFRONT OPENING. SEE STRUCTURAL SHEET S402 AND S403.
- INSTALL CMU INFILL AT EXISTING OPENING. SEE DETAILS ON SHEET S404.
- REINSTALL METAL COLUMNS AT 5TH FLOOR.
- INSTALL ALUMINUM EXPANSION JOINT ASSEMBLY AT NORTH AND SOUTH SIDES OF BUILDING 1 AT CONNECTION TO BUILDING 53. SEE SPEC SECTION 07 85 13 - EXPANSION JOINT COVER ASSEMBLY AND DETAILS ON SHEET AE511 FOR MORE INFORMATION.
- REINSTALL EXTERIOR ACCESS CONTROLS, EXTERIOR LIGHT FIXTURE AND EXTERIOR SECURITY COMMUNICATIONS FIXTURE AFTER EXTERIOR WORK COMPLETE.
- AT STAIR LOCATIONS OF REMOVED FIRE HOSE CABINETS AND ASSOCIATED PIPING, PATCH PARTITION OPENINGS WITH RATED GYPSUM BOARD TO MAINTAIN FIRE RATING. INTEGRITY OF REQUIRED STAIRWELL RATING. SEE FX SERIES DRAWINGS FOR ADDITIONAL INFORMATION.
- AT AREA BOUNDED BY GRID 10, 13, B, AND G, REPAIR AND RESTORE PORTIONS OF EXISTING PAINTED PLASTER FINISH TO DOCUMENTED PRE-DEMOLITION CONDITION WITH IN KIND MATERIAL. AT LOCATIONS OF SELECTIVE DEMOLITION INDICATED ON 1/AD02 AFTER COMPLETION OF WORK INDICATED ON 1/ME100.
- FOLLOWING THE STRUCTURAL EVALUATION AND REPAIRS TO THE THIRD FLOOR STRUCTURAL FLOOR, REINSTALL CEILING SYSTEMS, DUCTWORK, PLUMBING, FIRE PROTECTION SYSTEMS, ELECTRICAL SYSTEMS, LOW VOLTAGE SYSTEMS, AND FIREPROOFING IN THE SECOND FLOOR CEILING PLENUM. SLAB UNDERSIDE TO MEET TWO-HOUR RATED FLOOR CONSTRUCTION. SEE SPECIFICATIONS - GENERAL REQUIREMENTS 01 00 00 PARAGRAPH 1.3, FOR ALTERNATES IN WORK FROM BASE BID.
- EXISTING STRUCTURAL STEEL BRACING TO REMAIN, PAINT.

NOTE: NOT ALL THE KEYNOTES ARE USED ON THIS SHEET


BID DOCUMENTS

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----


3/19/2023 10:29:55 AM
C:\Users\pjd\Documents\15959 - VAHC-Bldg Building 1_R21 - Central.mxd_Yunyoung.nst
VA FORM 08 - 6231

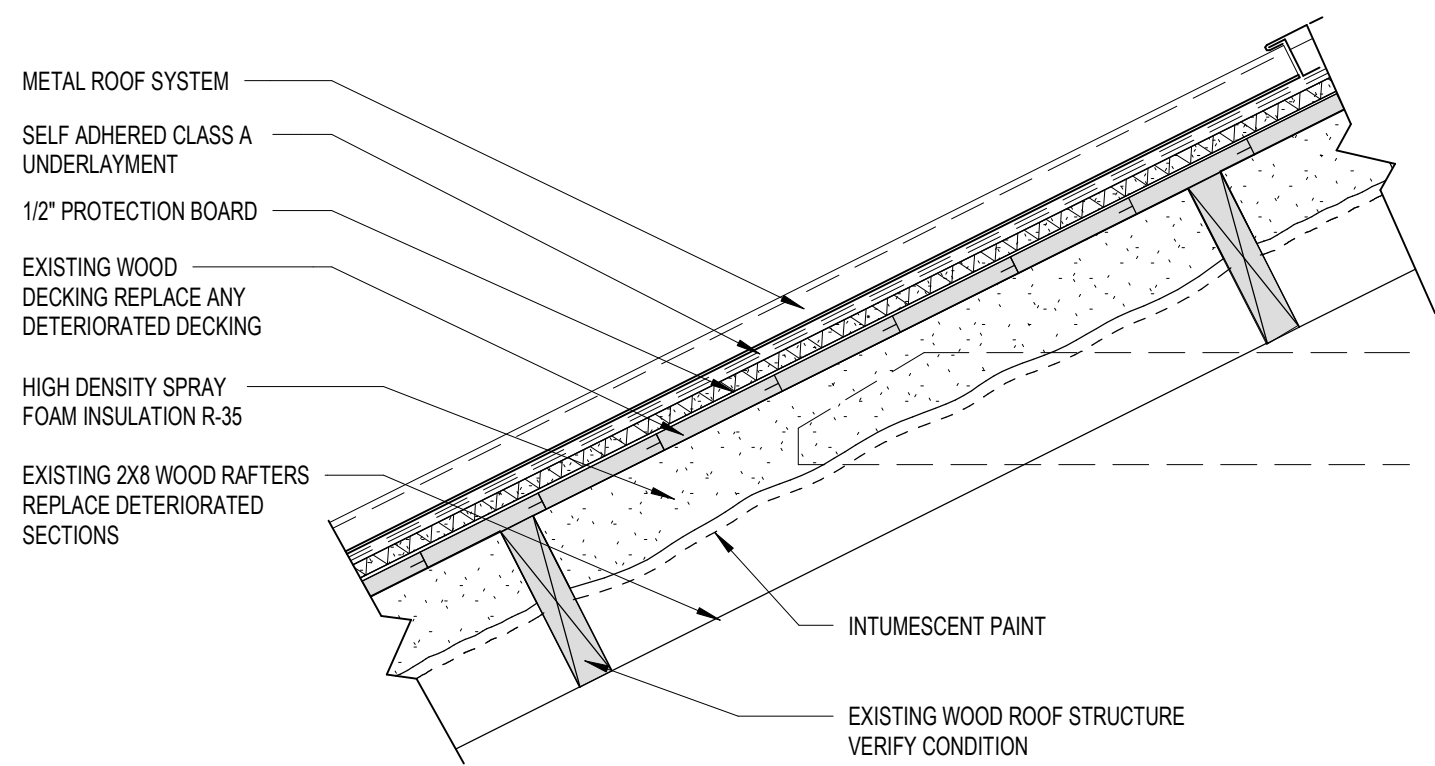


2 METAL ROOF TYPE 1 - BASE BID CONSTRUCTION
AE106/ 1 1/2" = 1'-0"

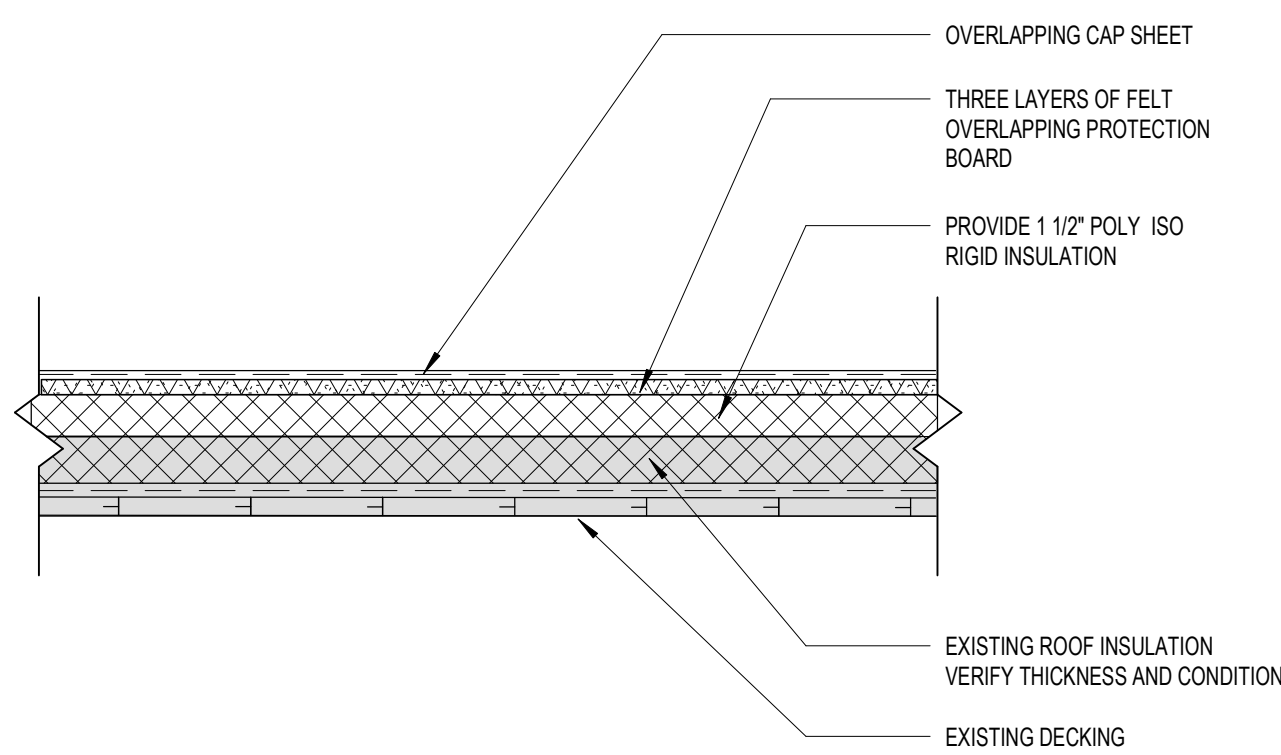

4 MODIFIED - BITUMEN ROOF TYPE 3
AE106/ 1 1/2" = 1'-0"

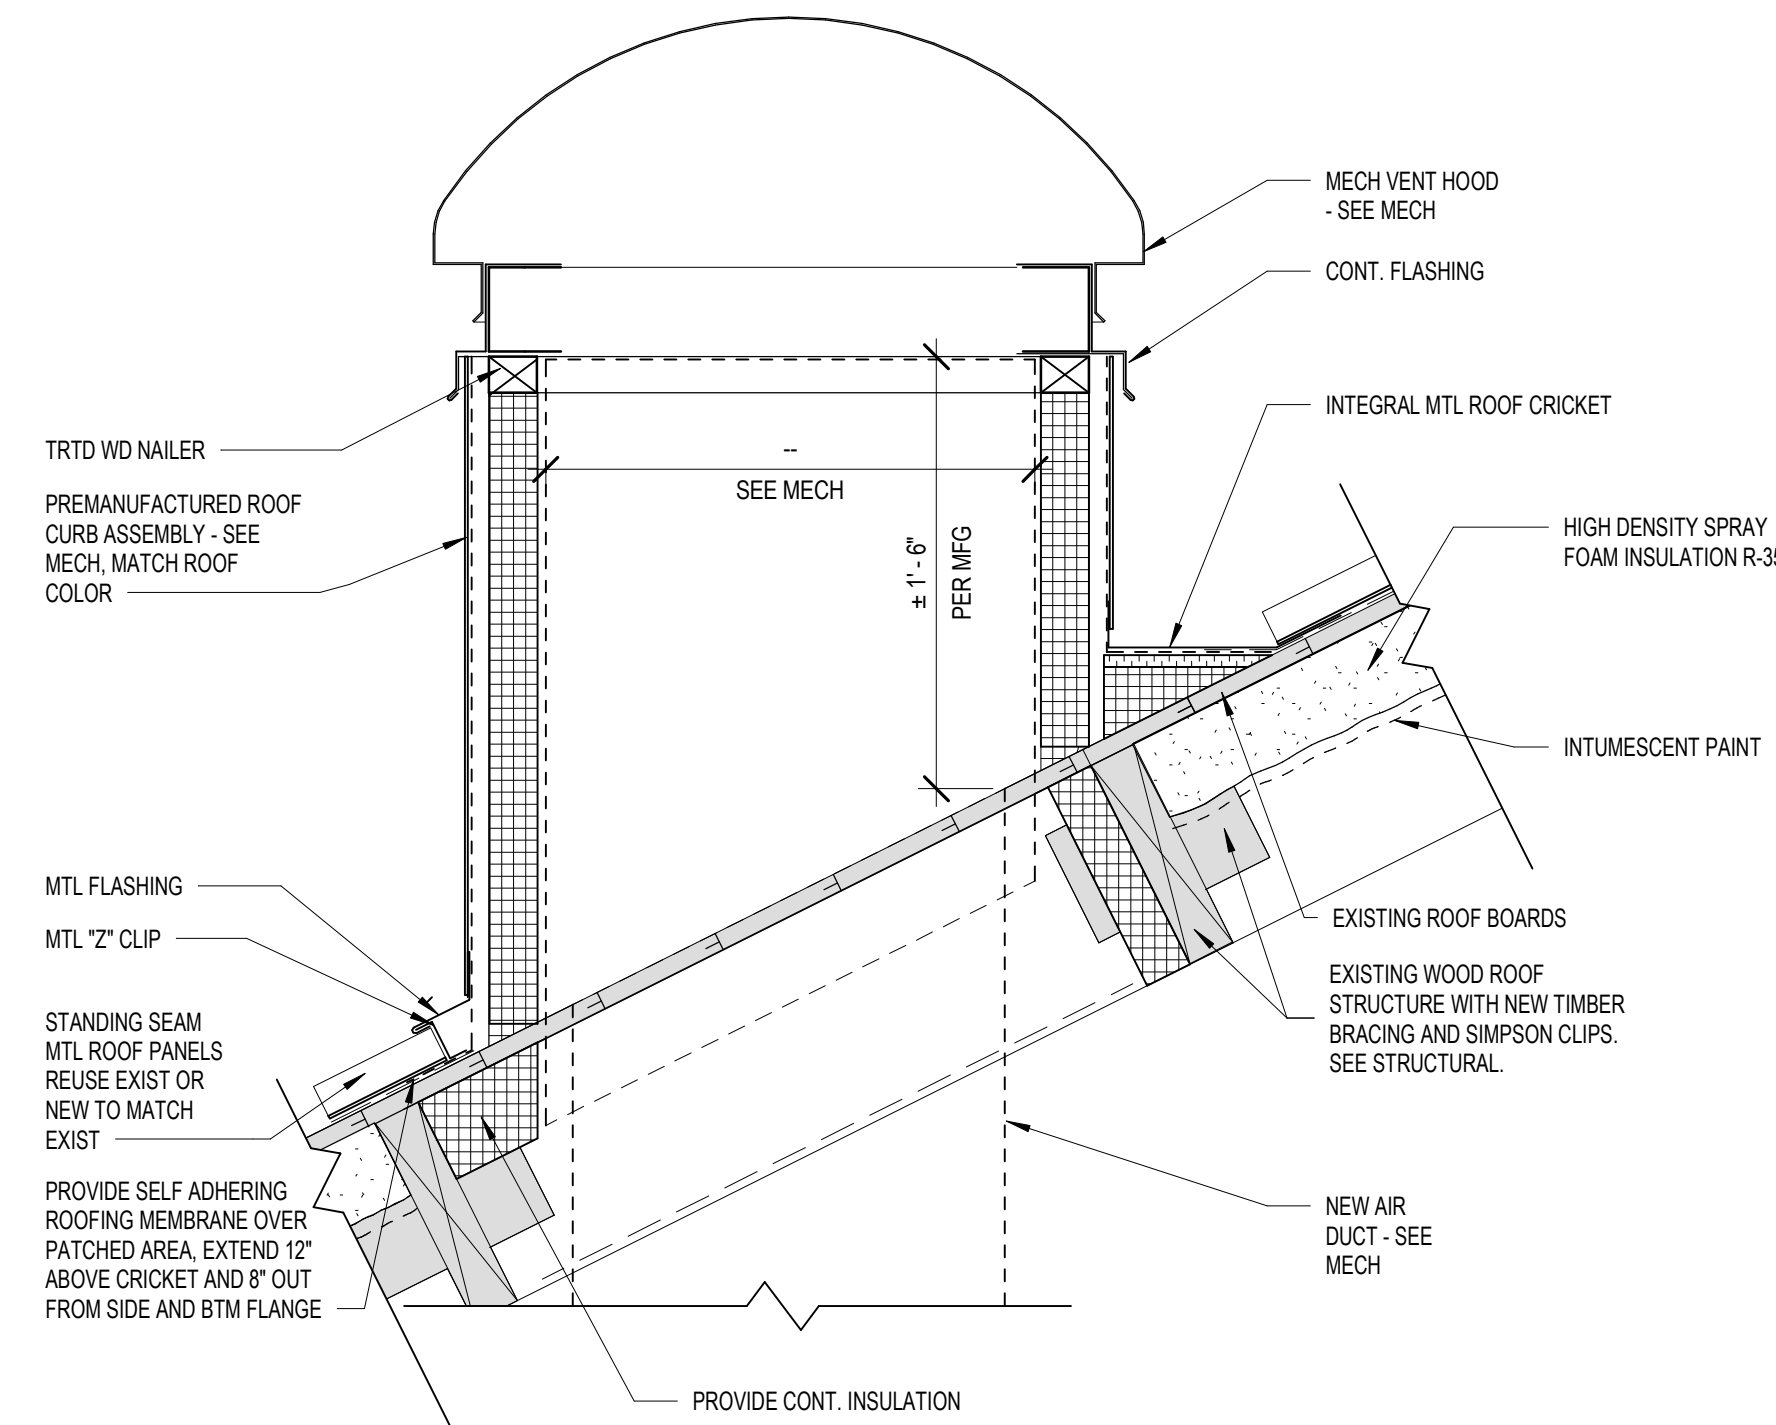

5 ROOF HOOD DETAIL
AE106/ 1 1/2" = 1'-0"

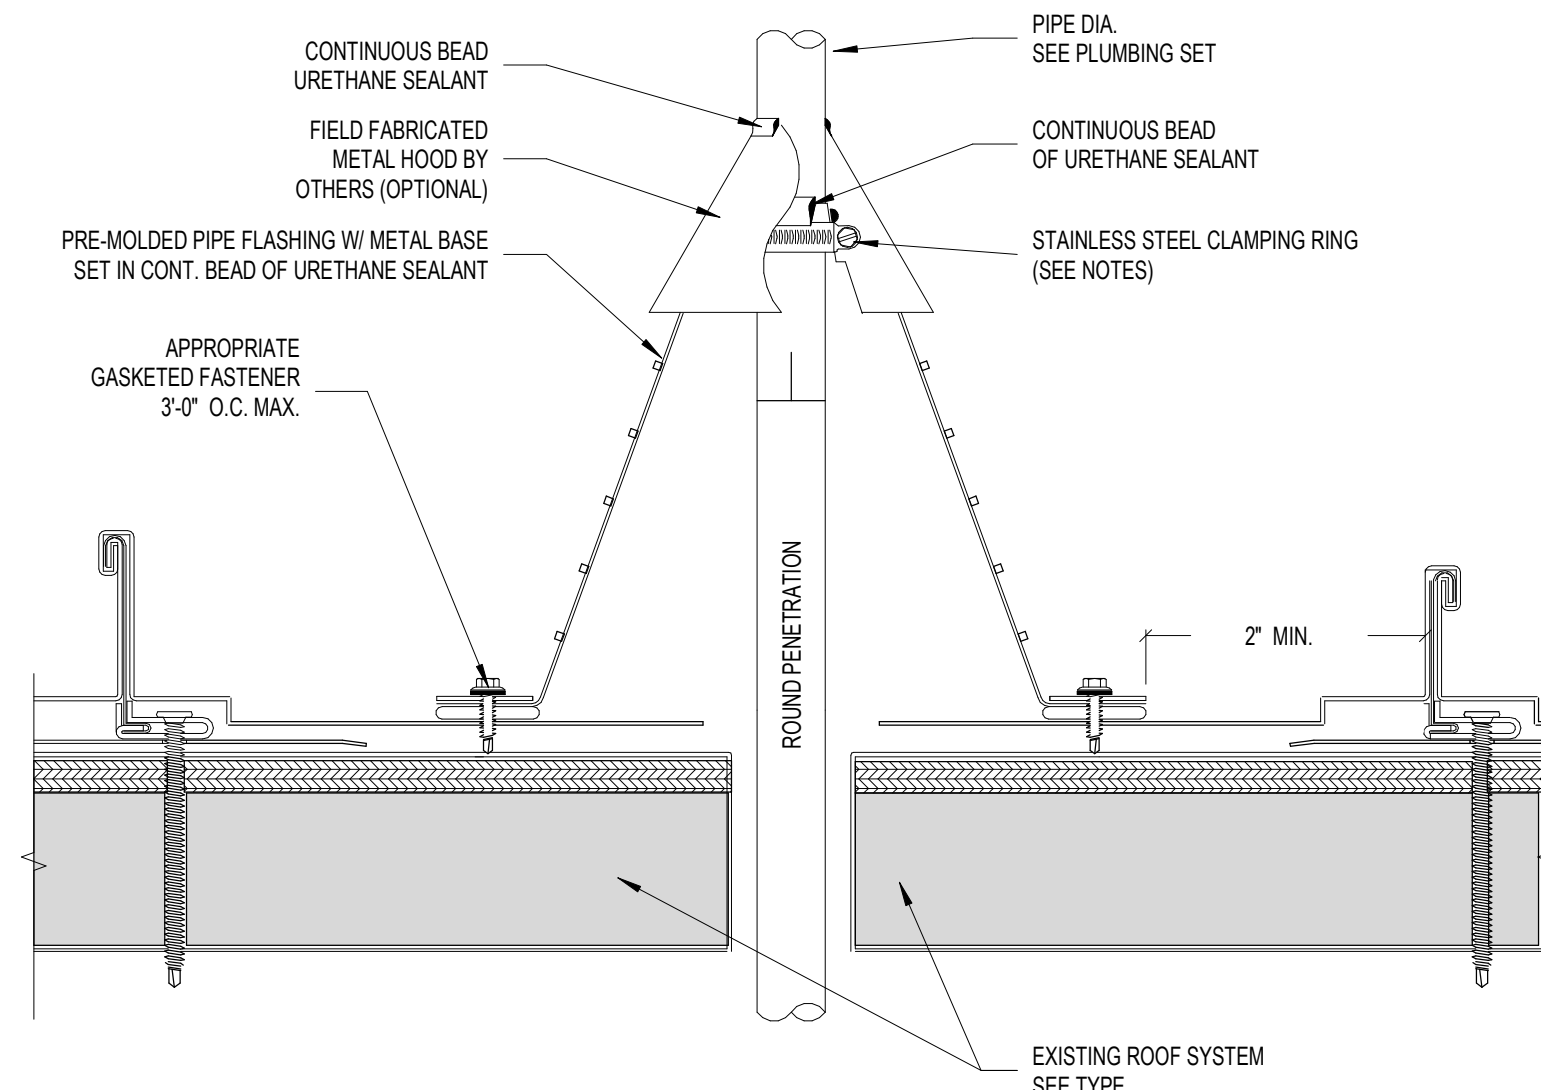

6 VENT THRU METAL ROOF
AE106/ 6" = 1'-0"

- | NOTE FOR VENT DETAIL | |
|----------------------|--|
| 1. | PIPE SURFACE MUST BE FREE OF ALL RUST, GREASE, INSULATION, ETC. |
| 2. | PIPE MUST BE ANCHORED TO ENSURE STABILITY |
| 3. | PRE-MOLDED PIPE FLASHING MAY BE CUT TO HEIGHT, BUT NO LOWER THAN REINFORCING RING (NO WRINKLES OR FOLDS UNDER CLAMPING RING) |
| 4. | APPLY LAP SEALANT BETWEEN PENETRATION AND PRE-MOLDED PIPE FLASHING PRIOR TO INSTALLATION OF CLAMPING RING |
| 5. | PIPE SHOULD EXTEND A MINIMUM OF 6" (203.2 mm) ABOVE ROOF SURFACE |
| 6. | COORDINATE ROOF PENETRATION LOCATION TO AVOID CONFLICT WITH THE STANDING SEAMS OR PANEL RIBS |

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD
THOMAS OLESAC, ARCHITECT
MS Lic # 5505
1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
ROOF DETAILS
Approved:

Phase
CONSTRUCTION DOCUMENTS
FULLY SPRINKLERED

Project Title		Project Number	
RENOVATE BUILDING 1		520-317X	
Location		Building Number	
BILOXI, MISSISSIPPI		1	
Issue Date	Checked	Drawn	Drawing Number
03/10/2023	LA	CD	AE106
Dwg. 64 of 238			



NOTE: SEE SHEET "IN101" FOR INTERIOR ELEVATION REFERENCE

1 3RD FLOOR PLAN
1/8" = 1'-0"

3RD FLOOR SPACE TYPES		
		Reno
1 - Acute Inpatient Medicine & Surgery		6,284
2 - Support/Infrastructure		2,280
3 - Ancillary/Diagnostic		4,291
4 - Common/Swing/Construction		5,025
Floor Total (GSF)		17,880
Total Variance in Space		0

KEYED NOTE THIS SHEET	
1	EXISTING EXHAUST DUCT TO REMAIN
2	NOT USED.
3	CENTER PARTITION ON MULLION CENTERLINE
4	EXISTING LAUNDRY CHUTE TO BE MODIFIED FOR NEW OPENING ACCESS
5	PROVIDE VISION OBSCURING TREATMENT ON INNER GLASS SURFACE
6	EXPANSION JOINT ASSEMBLY THIS LOCATION. SEE DETAIL 11AE001 & SPEC SECTION 07 05 13
7	PROVIDE UV FINISH ON INNER GLASS SURFACE THIS ROOM
8	METAL RAILING ALONG WINDOW WALL AT IMD SUPPLY STORAGE.
9	PATCH SURFACE OF EXISTING GYP BD/PLASTER SURFACE IN PREPARATION FOR FINISHES

FLOOR PLAN GENERAL NOTES	
1.	CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
2.	UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT AND RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA.
3.	CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDINGS AND IN SITE AREA DURING CONSTRUCTION.
4.	DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
5.	ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF GYPSUM BOARD, BACKER BOARD, CMU, CAST IN PLACE CONCRETE COLUMNS OR FINISHED FACE OF EXISTING WALLS UNLESS OTHERWISE NOTED.
6.	GYPSUM BOARD CONTROL JOINTS (GCJ) 30'-0" O.C. MAX. UNLESS NOTED OTHERWISE.
7.	FIRE EXTINGUISHER CABINETS ARE DENOTED ON THE FLOOR PLANS AS FEC. WALL MOUNTED FIRE EXTINGUISHERS ARE DENOTED ON THE PLANS AS (FE). SEE SHEET G102-G105 FOR FIRE EXTINGUISHER LOCATIONS AND AEE001 FOR FIRE CABINET DETAILS.
8.	LAYOUT OF RATED PARTITIONS IS SHOWN ON THE LIFE SAFETY PLAN SHEET G102-G104.
9.	SEE SHEET AE601 (PARTITION TYPES) FOR PARTITION COMPONENTS AND WALL THICKNESS.
10.	ALL DOOR FRAMES ARE 2" OFF OF ADJACENT WALL UNLESS NOTED OTHERWISE.
11.	AT ALL EXISTING SLAB PENETRATIONS THAT ARE NOT BEING REUSED, INFILL HOLES ACCORDING TO STRUCTURAL DETAILS AND REQUIREMENTS.
12.	SEE G102, AE121, AE122 AND AE123 FOR SHOWER RECEPTOR TYPES

FLOOR PLAN LEGEND	
	EXISTING TO REMAIN
	CONSTRUCTION
	FIRE EXTINGUISHER CABINET


GRAPHIC LEGEND	
	ROOM NAME
	ROOM DESIGNATION
	WALL PARTITION TYPE
	DOOR OPENING
	CURTAINWALL/ WINDOW TYPE
	COLUMN GRID LINE
	DETAIL
	EXTERIOR/ INTERIOR ELEVATION
	BUILDING/ DETAIL SECTION
	FLOOR DRAIN
	KEYNOTE
	EQUIPMENT TAG
	CENTER LINE
	NORTH ARROW
	GRAPHIC SCALE

5/4/2023 10:05:02 AM
C:\Users\pctol\Documents\15950 - VAHC-Bldg Building 1_R21 - Central mode_Yunyoung.nrt

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD
THOMAS OLESAK, ARCHITECT
MS Lic # 5505
1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

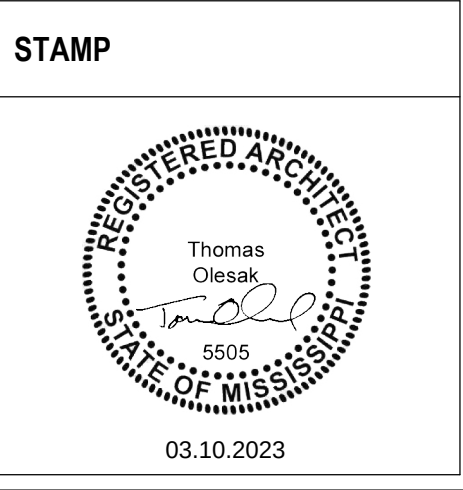

Office of
Construction
and Facilities
Management
VA U.S. Department
of Veterans
Affairs


Drawing Title
3RD FLOOR PLAN - BUILDOUT
Approved:

Phase
**CONSTRUCTION
DOCUMENTS**

FULLY SPRINKLERED

Project Title RENOVATE BUILDING 1		Project Number 520-317X
Location BILOXI, MISSISSIPPI		Building Number 1
Issue Date 03/10/2023	Checked LA	Drawn CD,PC
Dwg. 65 of 238		Drawing Number AE107

BID DOCUMENTS

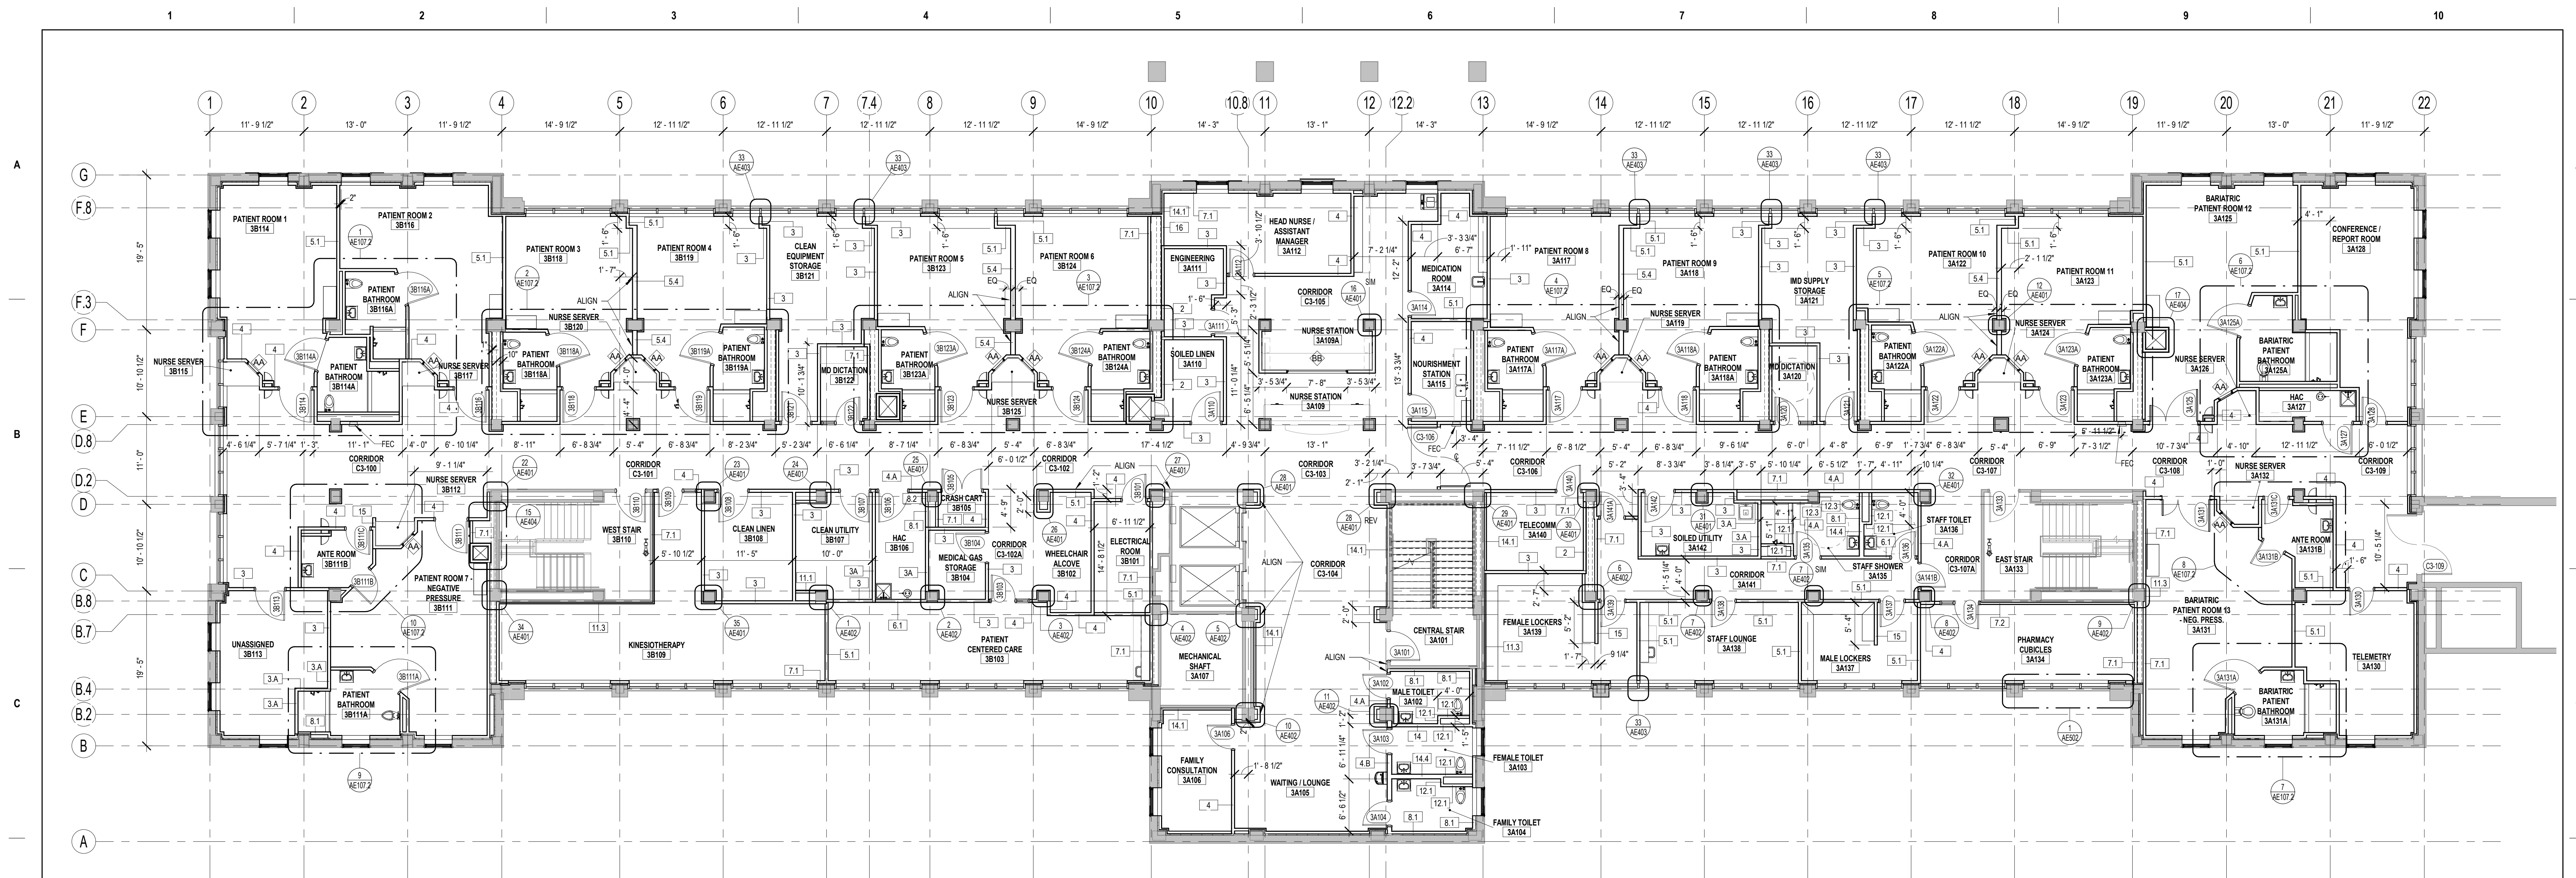

1 ENLARGED DIMENSION PLAN
AE107.1 1/8" = 1'-0"



DIMENSION PLAN GENERAL NOTES

1. CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
2. UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND NOTICING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKOWN CONDITIONS RETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT AND RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA.
3. CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDINGS AND IN SITE AREA DURING CONSTRUCTION.
4. DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
5. ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF GYPSUM BOARD, BACKER BOARD, CMU, CAST IN PLACE CONCRETE COLUMNS OR FINISHED FACE OF EXISTING WALLS UNLESS OTHERWISE NOTED.
6. GYPSUM BOARD CONTROL JOINTS (GCJ) 30"Ø O.C. MAX. UNLESS NOTED OTHERWISE.
7. FIRE EXTINGUISHER CABINETS ARE DETACHED ON THE FLOOR PLANS AS FEC. WALL MOUNTED FIRE EXTINGUISHERS ARE DETACHED ON THE PLANS AS (FE). SEE SHEET G102-G105 FOR FIRE EXTINGUISHER LOCATIONS AND AE501 FOR FIRE CABINET DETAILS.
8. LAYOUT OF RATED PARTITIONS IS SHOWN ON THE LIFE SAFETY PLAN SHEET G102-G104.
9. SEE SHEET AE401 (PARTITION TYPES) FOR PARTITION COMPONENTS AND WALL THICKNESS.
10. SEE G102, AE121, AE122 AND AE123 FOR SHOWER RECEPTOR TYPES

DIMENSION PLAN LEGEND

	EXISTING TO REMAIN
	CONSTRUCTION
	FIRE EXTINGUISHER CABINET

GRAPHIC LEGEND

	ROOM DESIGNATION
	WALL PARTITION TYPE
	DOOR OPENING
	CURTAINWALL/ WINDOW TYPE
	COLUMN GRID LINE
	DETAIL
	EXTERIOR/ INTERIOR ELEVATION
	BUILDING/ DETAIL SECTION
	FLOOR DRAIN
	KEYNOTE
	EQUIPMENT TAG
	CENTER LINE
	NORTH ARROW
	GRAPHIC SCALE

BID DOCUMENTS

[illegible]

CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESAK, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP



Office of
Construction
and Facilities
Management



U.S. Department
of Veterans
Affairs

	Drawing Title
--	---------------

3RD FLOOR DIMENSION PLAN

Approved:

Phase

CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

	Project Title
--	----------------------

RENOVATE BUILDING 1

Location	BILOXI, MISSISSIPPI
----------	---------------------

Issue Date	03/10/2023
------------	------------

Checked
Checker

Project Number

520-317X


Building Number

Drawing Number

AE107.1


Page 66 of 238

C:\Users\pjd\Documents\15959 - VA/C-Box Building 1_R21 - Central model_Yunyoung.nxd 3/13/2023 10:30:10 AM

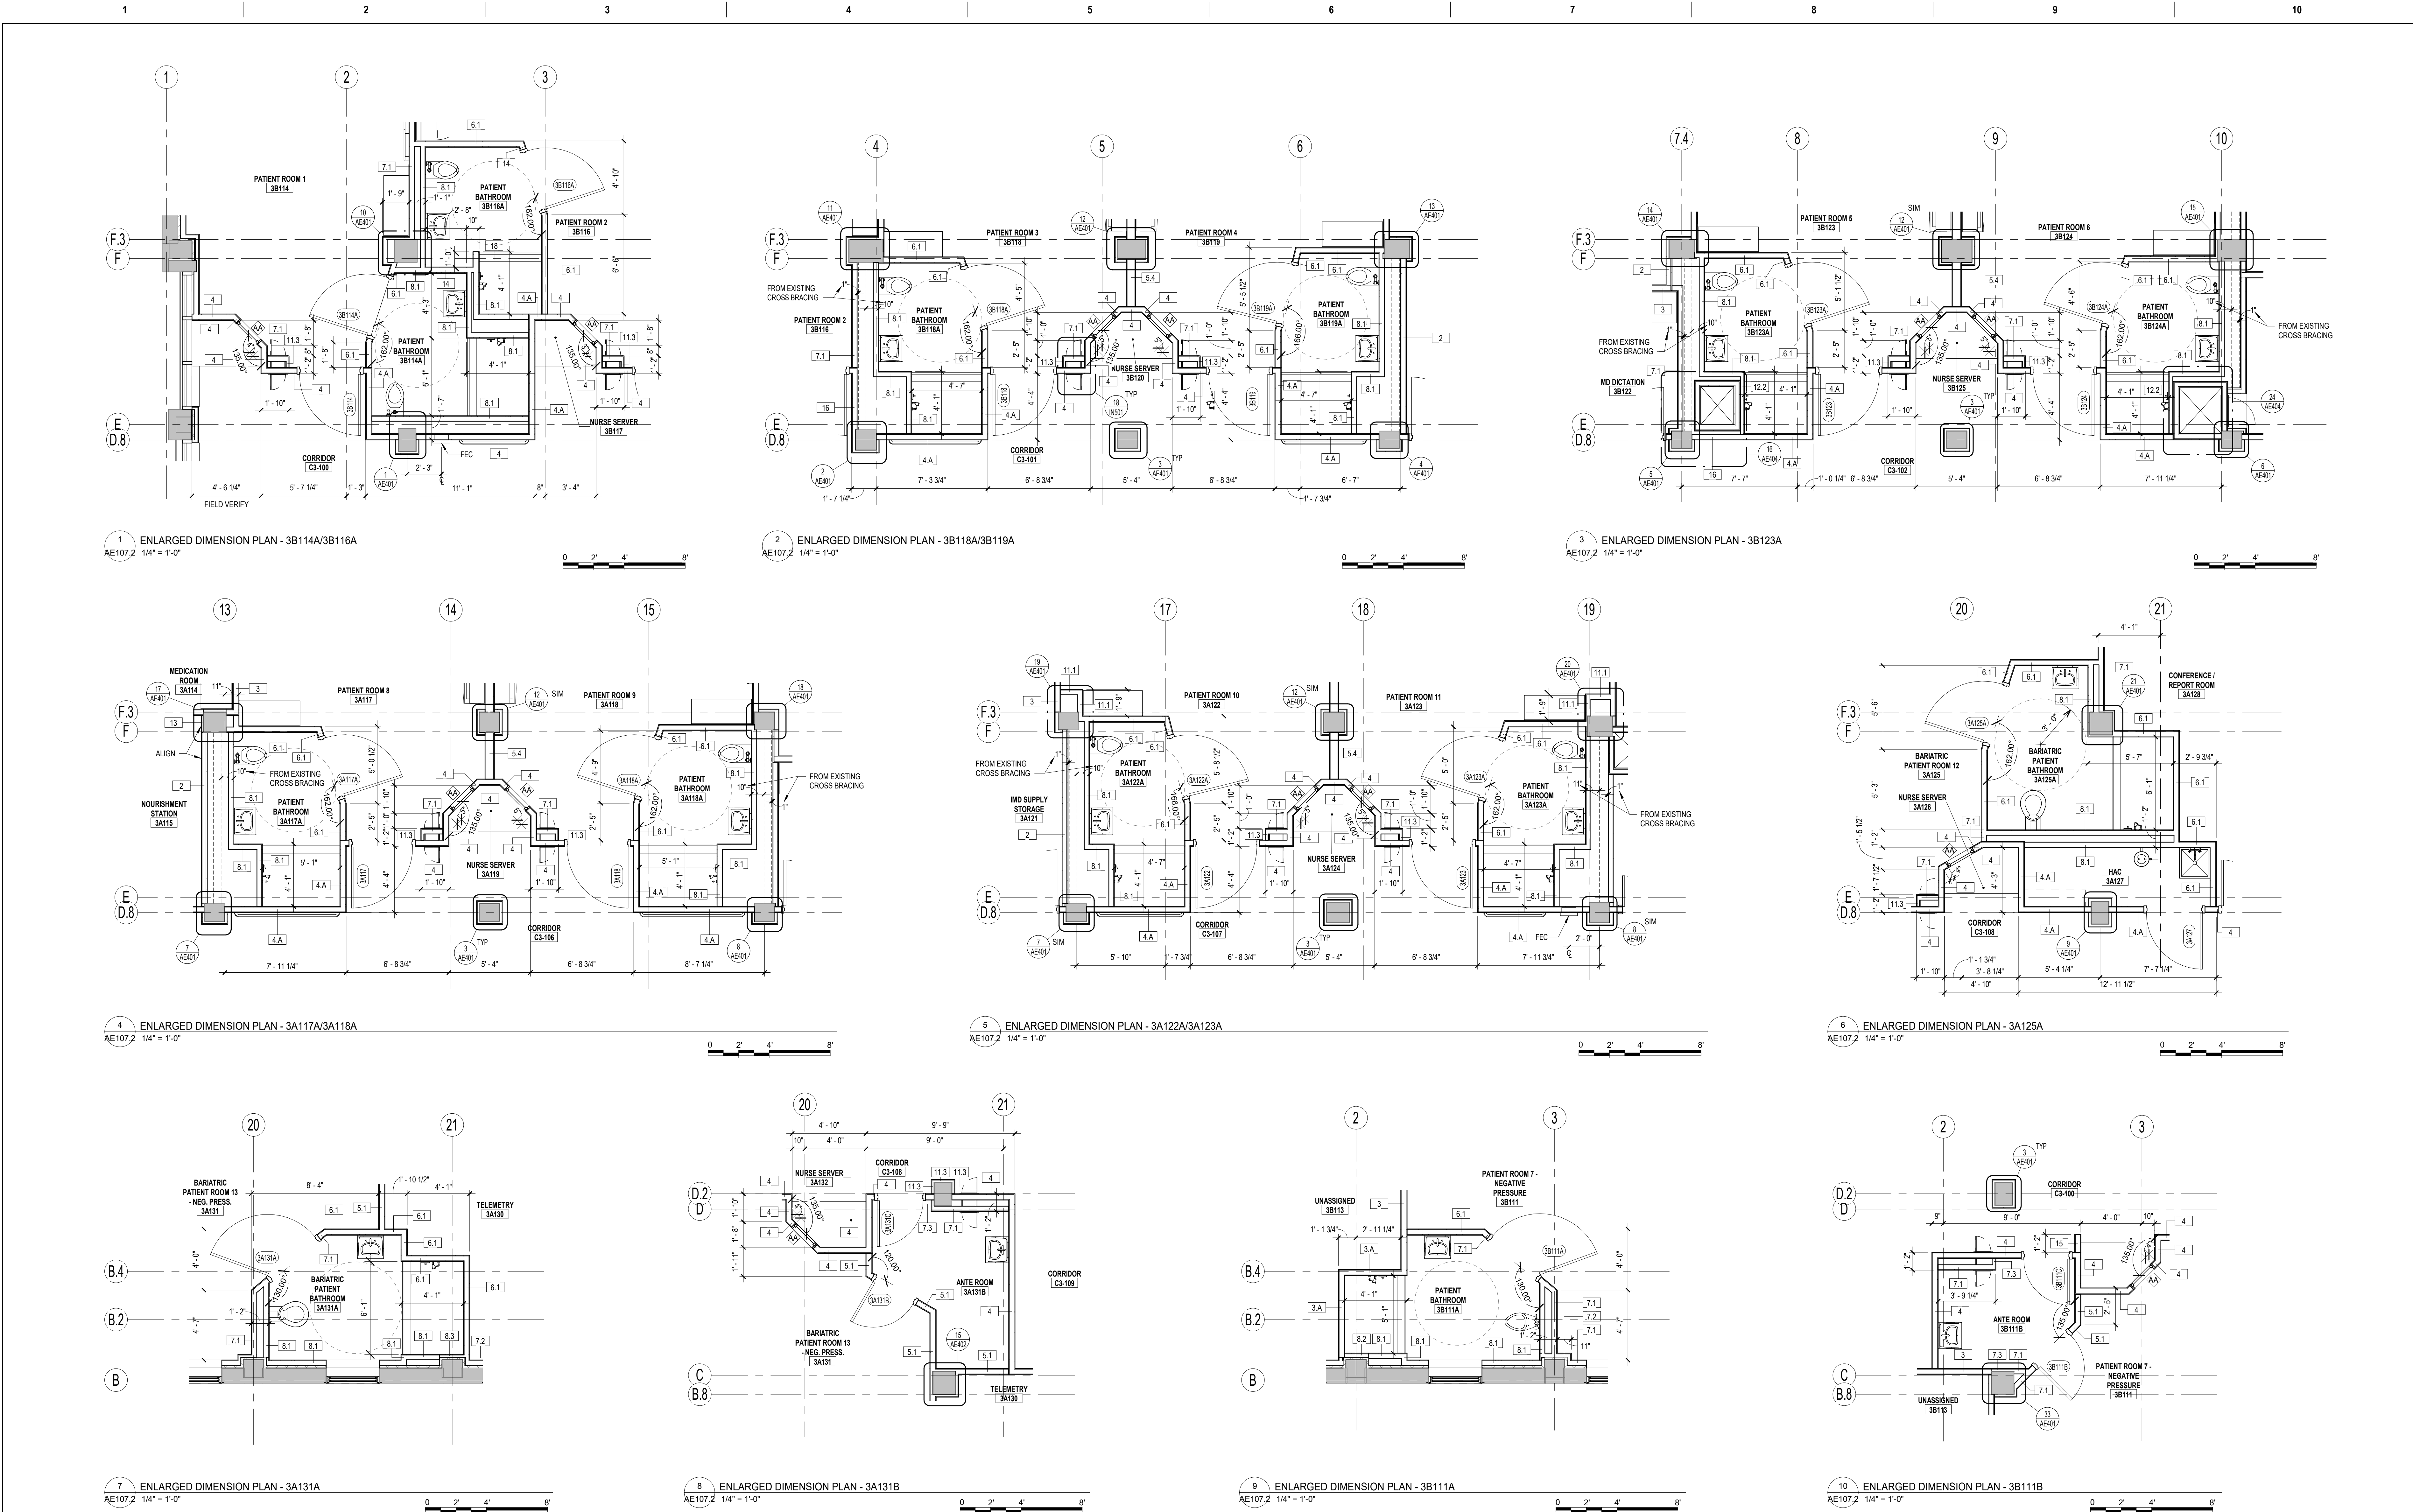

BID DOCUMENTS

			CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title 3RD FLOOR ENLARGED DIMENSION PLANS	Phase CONSTRUCTION DOCUMENTS	Project Title RENOVATE BUILDING 1	Project Number 520-317X
				THOMAS OLESAK, ARCHITECT		U.S. Department of Veterans Affairs	Approved:	FULLY SPRINKLERED	Location BILOXI, MISSISSIPPI	Drawing Number AE107.2
				MS Lic # 5505						Issue Date 03/10/2023
				1050 HOYT AVE WEST ST PAUL, MN 55117 952-451-0460						Dwg. 67 of 238

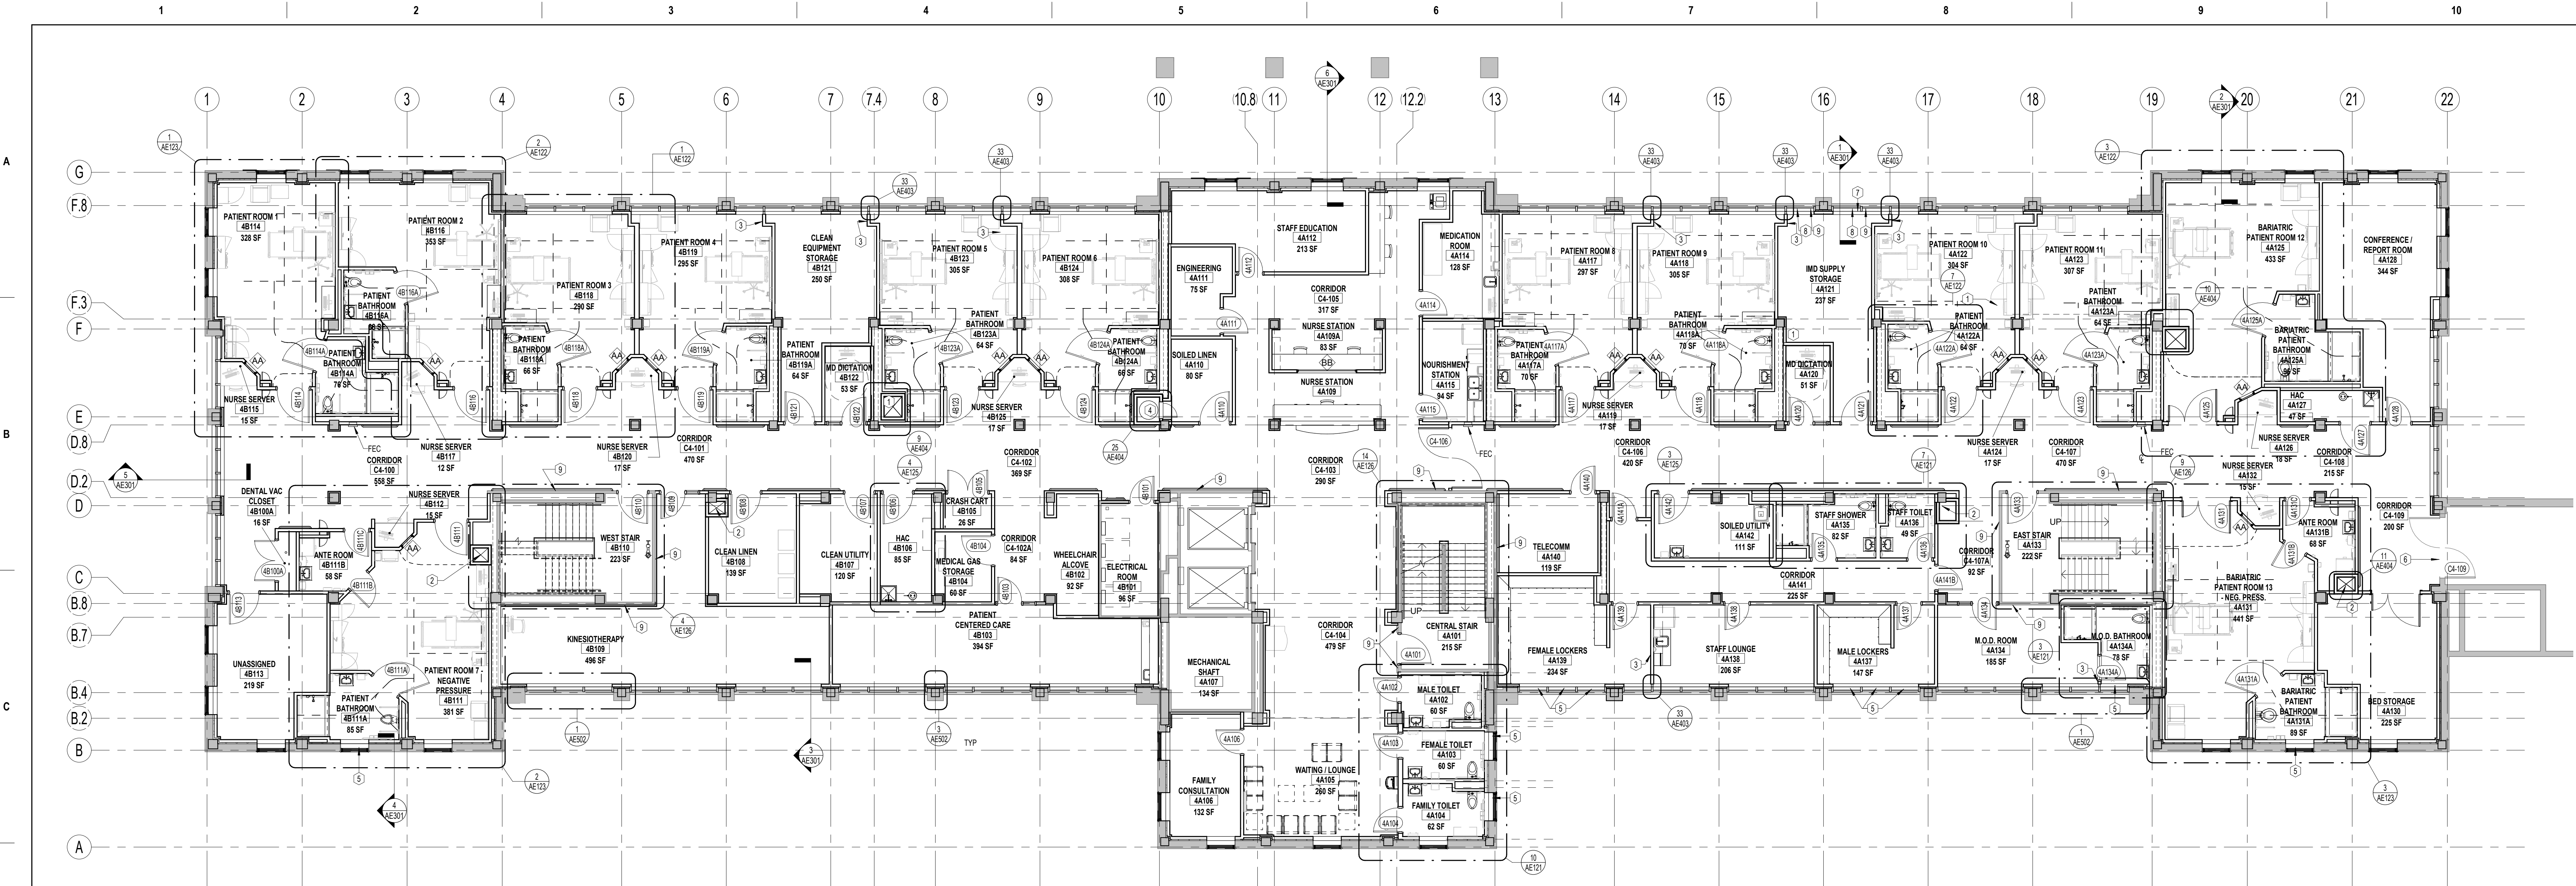

NOTE: SEE SHEET "IN102" FOR INTERIOR ELEVATION REFERENCE

1 4TH FLOOR PLAN
1/8" = 1'-0"

4TH FLOOR SPACE TYPES	
1 - Acute Inpatient Medicine & Surgery	Reno
2 - Support/Infrastructure	6,307
3 - Ancillary/Diagnostic	2,262
4 - Specialty Care	4,278
5 - Common/Swing/Construction	16
	5,017
Floor Total (GSF)	
17,880	
Total Variance in Space	
0	

KEYED NOTES THIS SHEET

- EXISTING EXHAUST DUCT TO REMAIN
- EXHAUST DUCT FLOORS 4 - ATTIC. SEE STRUCTURAL FOR SLAB OPENING DETAILS.
- CENTER PARTITION ON MILLION CENTERLINE
- EXISTING LAUNDRY CHUTE TO BE MODIFIED FOR NEW OPENING ACCESS
- PROVIDE VISION OSCURRING TREATMENT ON INNER GLASS SURFACE
- EXPANSION JOINT ASSEMBLY THIS LOCATION. SEE DETAIL 111AE501 & SPEC SECTION 07 95 13
- PROVIDE UV FINISH ON INNER GLASS SURFACE THIS ROOM
- METAL RAILING ALONG WINDOW WALL AT IMD SUPPLY STORAGE.
- PATCH SURFACE OF EXISTING GYP BD/PLASTER SURFACE IN PREPARATION FOR FINISHES

FLOOR PLAN GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT AND RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDINGS AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF GYPSUM BOARD, BACKER BOARD, CMU, CAST IN PLACE CONCRETE COLUMNS OR FINISHED FACE OF EXISTING WALLS UNLESS OTHERWISE NOTED.
- GYPSUM BOARD CONTROL JOINTS (GCJ), 30'-0" O.C. MAX. UNLESS NOTED OTHERWISE.
- FIRE EXTINGUISHER CABINETS ARE DENOTED ON THE FLOOR PLANS AS FEC. WALL MOUNTED FIRE EXTINGUISHERS ARE DENOTED ON THE PLANS AS (FE). SEE SHEET G1102-G1105 FOR FIRE EXTINGUISHER LOCATIONS AND AEE601 FOR FIRE CABINET DETAILS.
- LAYOUT OF RATED PARTITIONS IS SHOWN ON THE LIFE SAFETY PLAN SHEET G1102-G1104.
- SEE SHEET AEA601 (PARTITION TYPES) FOR PARTITION COMPONENTS AND WALL THICKNESS.
- ALL DOOR FRAMES ARE 2" OFF OF ADJACENT WALL UNLESS NOTED OTHERWISE.
- AT ALL EXISTING SLAB PENETRATIONS THAT ARE NOT BEING REUSED, INFILL HOLES ACCORDING TO STRUCTURAL DETAILS AND REQUIREMENTS.
- SEE G1102, AE121, AE122 AND AE123 FOR SHOWER RECEPTOR TYPES

FLOOR PLAN LEGEND

- EXISTING TO REMAIN
- CONSTRUCTION
- FIRE EXTINGUISHER CABINET

GRAPHIC LEGEND

- | ROOM NAME | ROOM DESIGNATION |
|-------------|------------------------------|
| 101 | 100 SF |
| XX.X | WALL PARTITION TYPE |
| 101 | DOOR OPENING |
| 1L | CURTAINWALL/ WINDOW TYPE |
| 6.2 | COLUMN GRID LINE |
| 1A100 | DETAIL |
| 1A100 | EXTERIOR/ INTERIOR ELEVATION |
| 1A100 | BUILDING/ DETAIL SECTION |
| 1A100 | FLOOR DRAIN |
| N | KEYNOTE |
| A0001 | EQUIPMENT TAG |
| CL | CENTER LINE |
| N | NORTH ARROW |
| 0 4' 8' 16' | GRAPHIC SCALE |

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESAC, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP



Office of
Construction
and Facilities
Management

U.S. Department
of Veterans
Affairs

Drawing Title
4TH FLOOR PLAN - BUILDOUT

Approved:

Phase
CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

Project Title
RENOVATE BUILDING 1

Location
BILOXI, MISSISSIPPI

Issue Date
03/10/2023

Checked
LA


Drawn
CD,PC

Project Number
520-317X

Building Number
1

Drawing Number
AE108

Dwg. 68 of 238

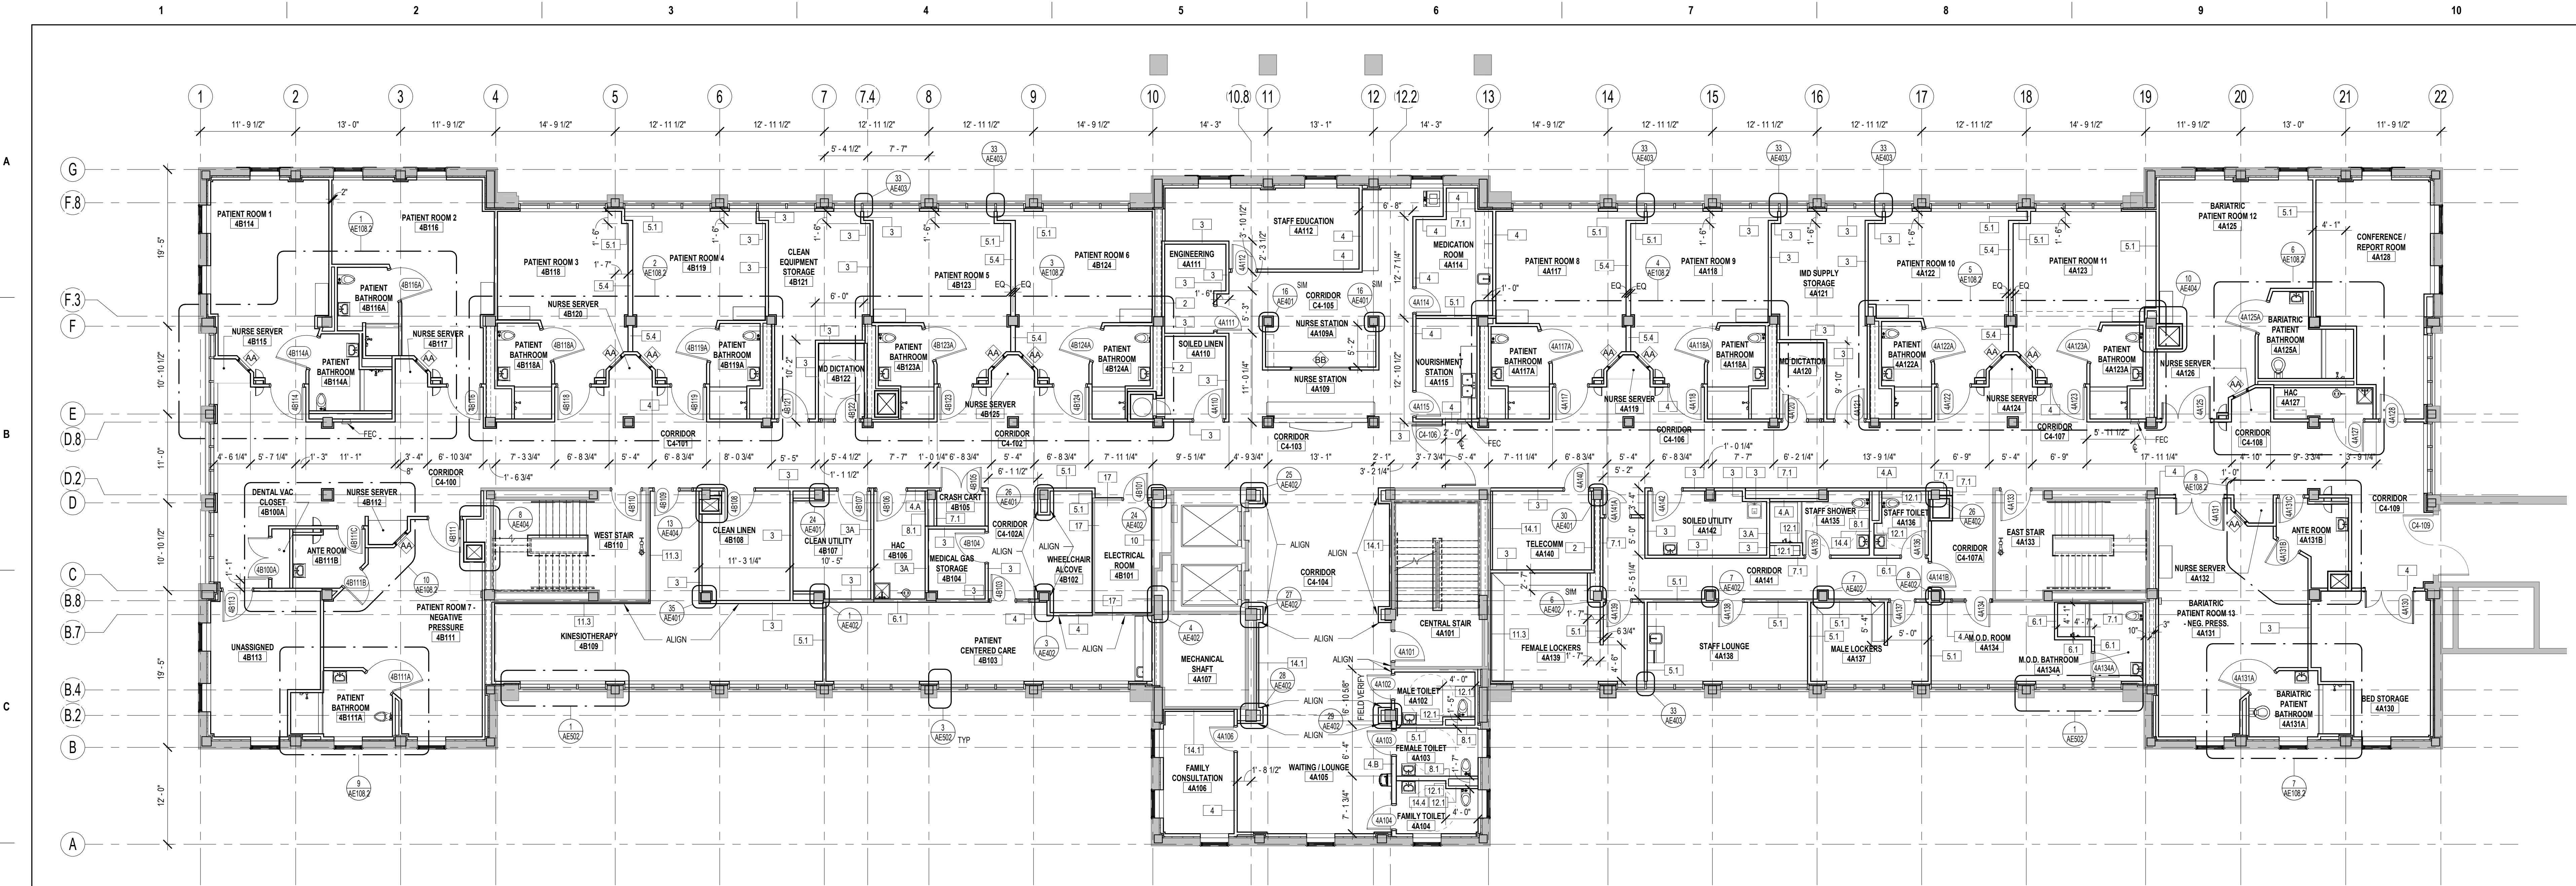

DIMENSION PLAN GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT AND RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDINGS AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF GYPSUM BOARD, BACKER BOARD, CMU, CAST IN PLACE CONCRETE COLUMNS OR FINISHED FACE OF EXISTING WALLS UNLESS OTHERWISE NOTED.
- GYPSUM BOARD CONTROL JOINTS (GCJ) 3/8" O.C. MAX. UNLESS NOTED OTHERWISE.
- FIRE EXTINGUISHER CABINETS ARE DENOTED ON THE FLOOR PLANS AS FEC; WALL MOUNTED FIRE EXTINGUISHERS ARE DENOTED ON THE PLANS AS (FE). SEE SHEET G102-G105 FOR FIRE EXTINGUISHER LOCATIONS AND AE601 FOR FIRE CABINET DETAILS.
- LAYOUT OF RATED PARTITIONS IS SHOWN ON THE LIFE SAFETY PLAN SHEET G102-G104.
- SEE SHEET AE601 (PARTITION TYPES) FOR PARTITION COMPONENTS AND WALL THICKNESS.
- SEE G102, AE121, AE122 AND AE123 FOR SHOWER RECEPTOR TYPES

DIMENSION PLAN LEGEND

- EXISTING TO REMAIN
- CONSTRUCTION
- FIRE EXTINGUISHER CABINET

GRAPHIC LEGEND


- | ROOM NAME | ROOM DESIGNATION |
|---------------|---------------------------------|
| 101
150 SF | WALL PARTITION TYPE |
| 101 | DOOR OPENING |
| 11 | CURTAINWALL/
WINDOW TYPE |
| 6.2 | COLUMN GRID LINE |
| 1
A102 | DETAIL |
| 1
A102 | EXTERIOR/ INTERIOR
ELEVATION |
| 1
A102 | BUILDING/ DETAIL
SECTION |
| 1
A102 | FLOOR DRAIN |
| N | KEYNOTE |
| A001 | EQUIPMENT TAG |
| 6 | CENTER LINE |
| North Arrow | NORTH ARROW |
| 0 4' 8' 16' | GRAPHIC SCALE |

BID DOCUMENTS


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

C:\Users\p\Documents\15950 - VAHC-Bldg Building 1_121 - Central mode_Yunyoung.nrt
3/13/2023 10:30:20 AM
F
VA FORM 08 - 6231


3/13/2023 10:30:25 AM
C:\Users\pjd\Documents\1595 - VAHC-Bldg Building 1_R21_Central.mxd_Yunyoung.nrt
VA FORM 08 - 6231

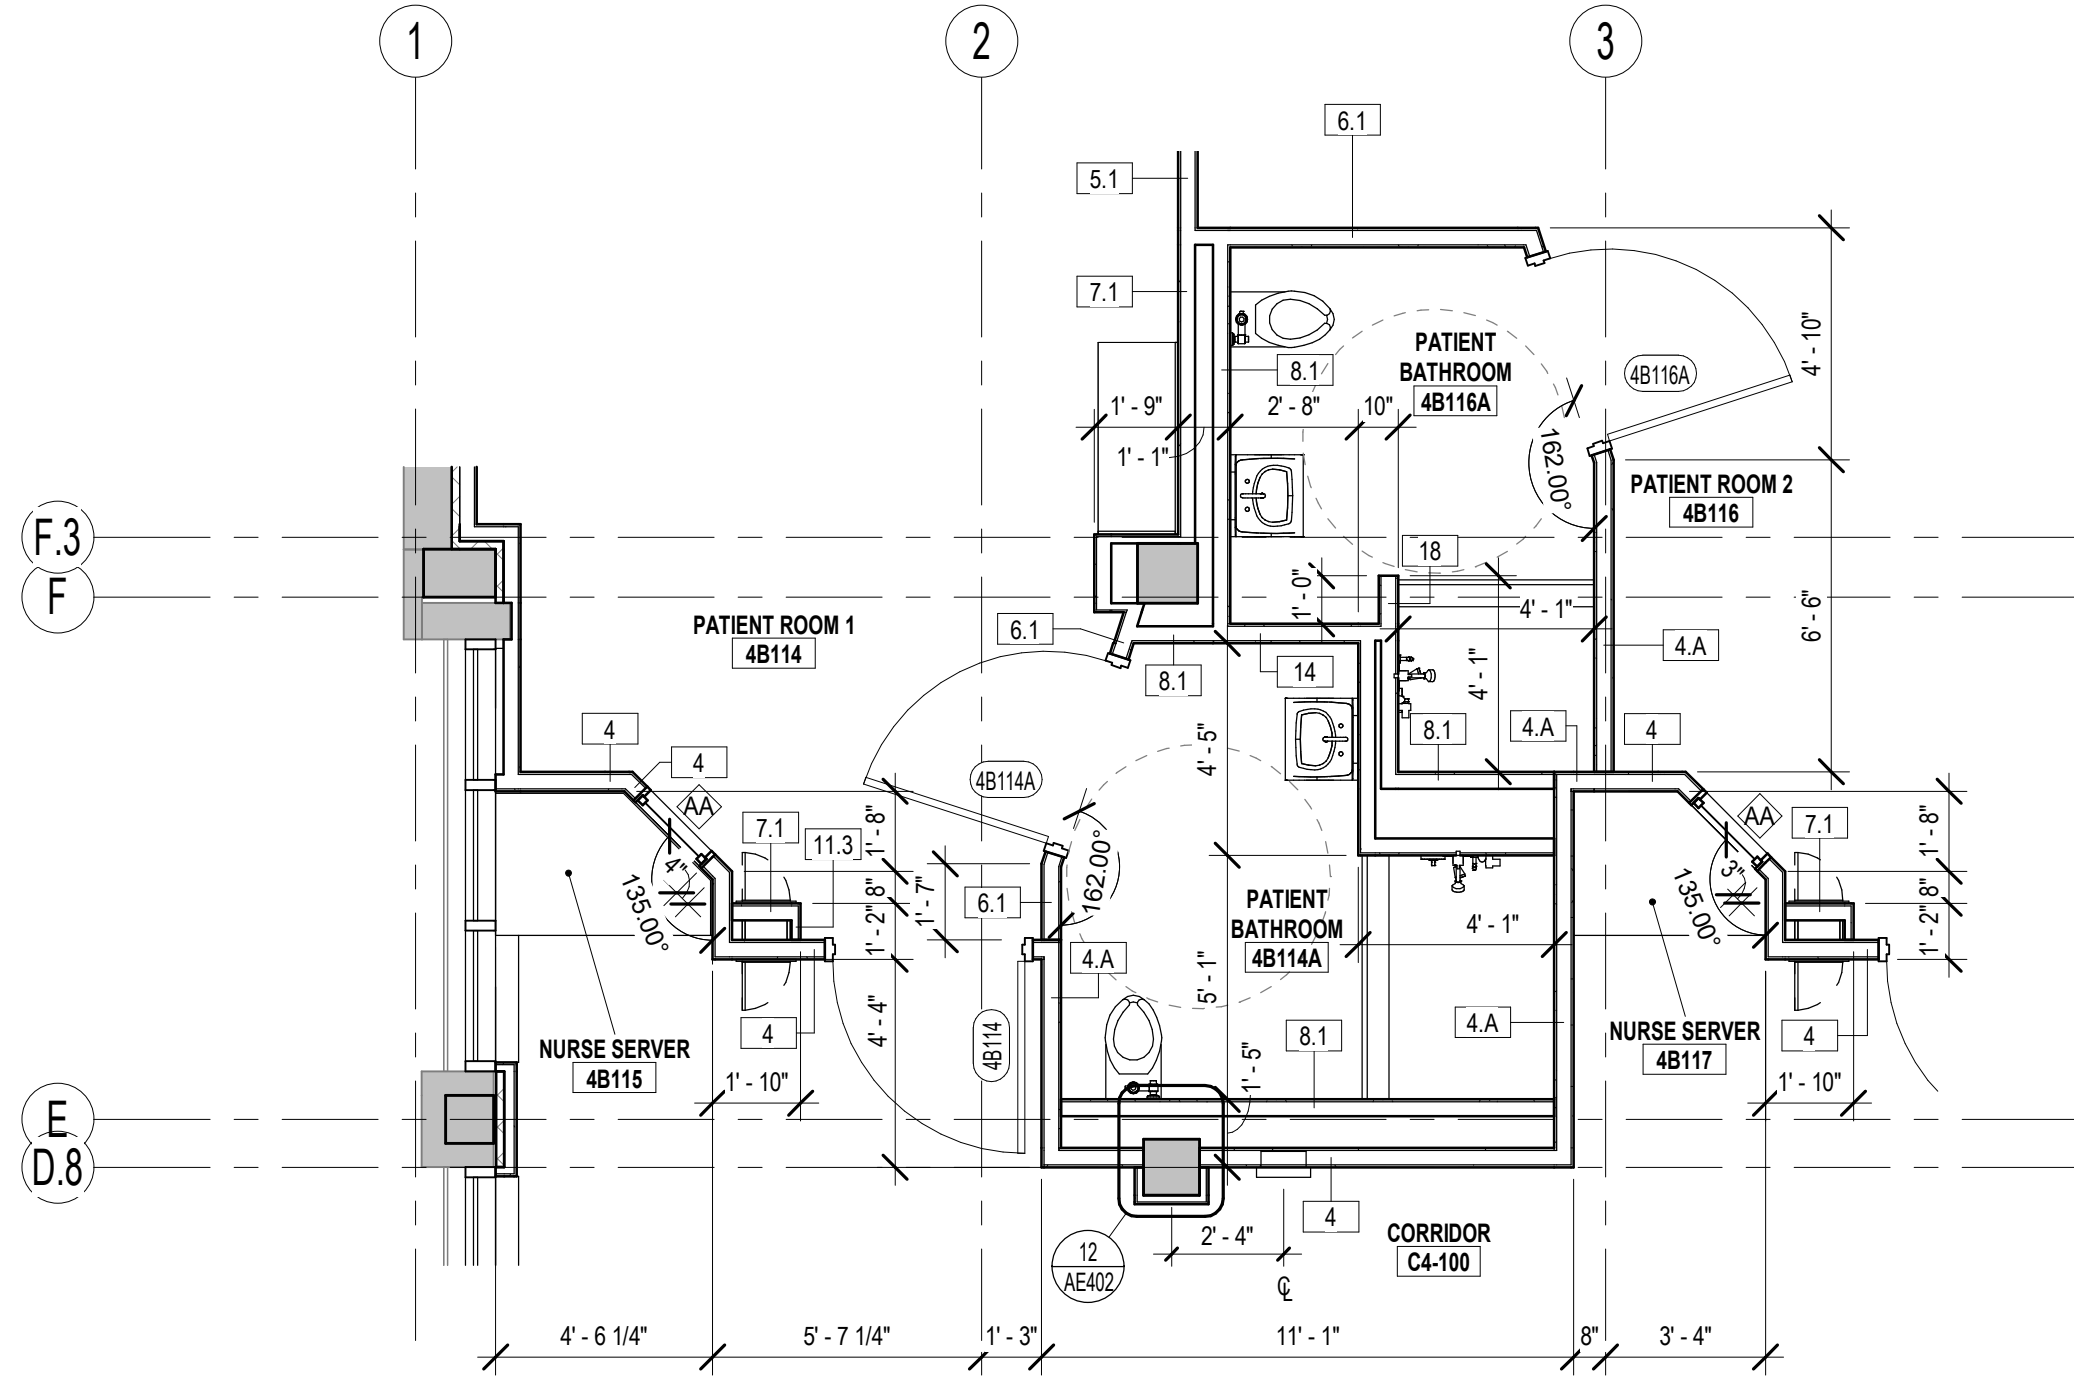


1 ENLARGED DIMENSION PLAN - 4B114/4B116A
AE108.2 1/4" = 1'-0"

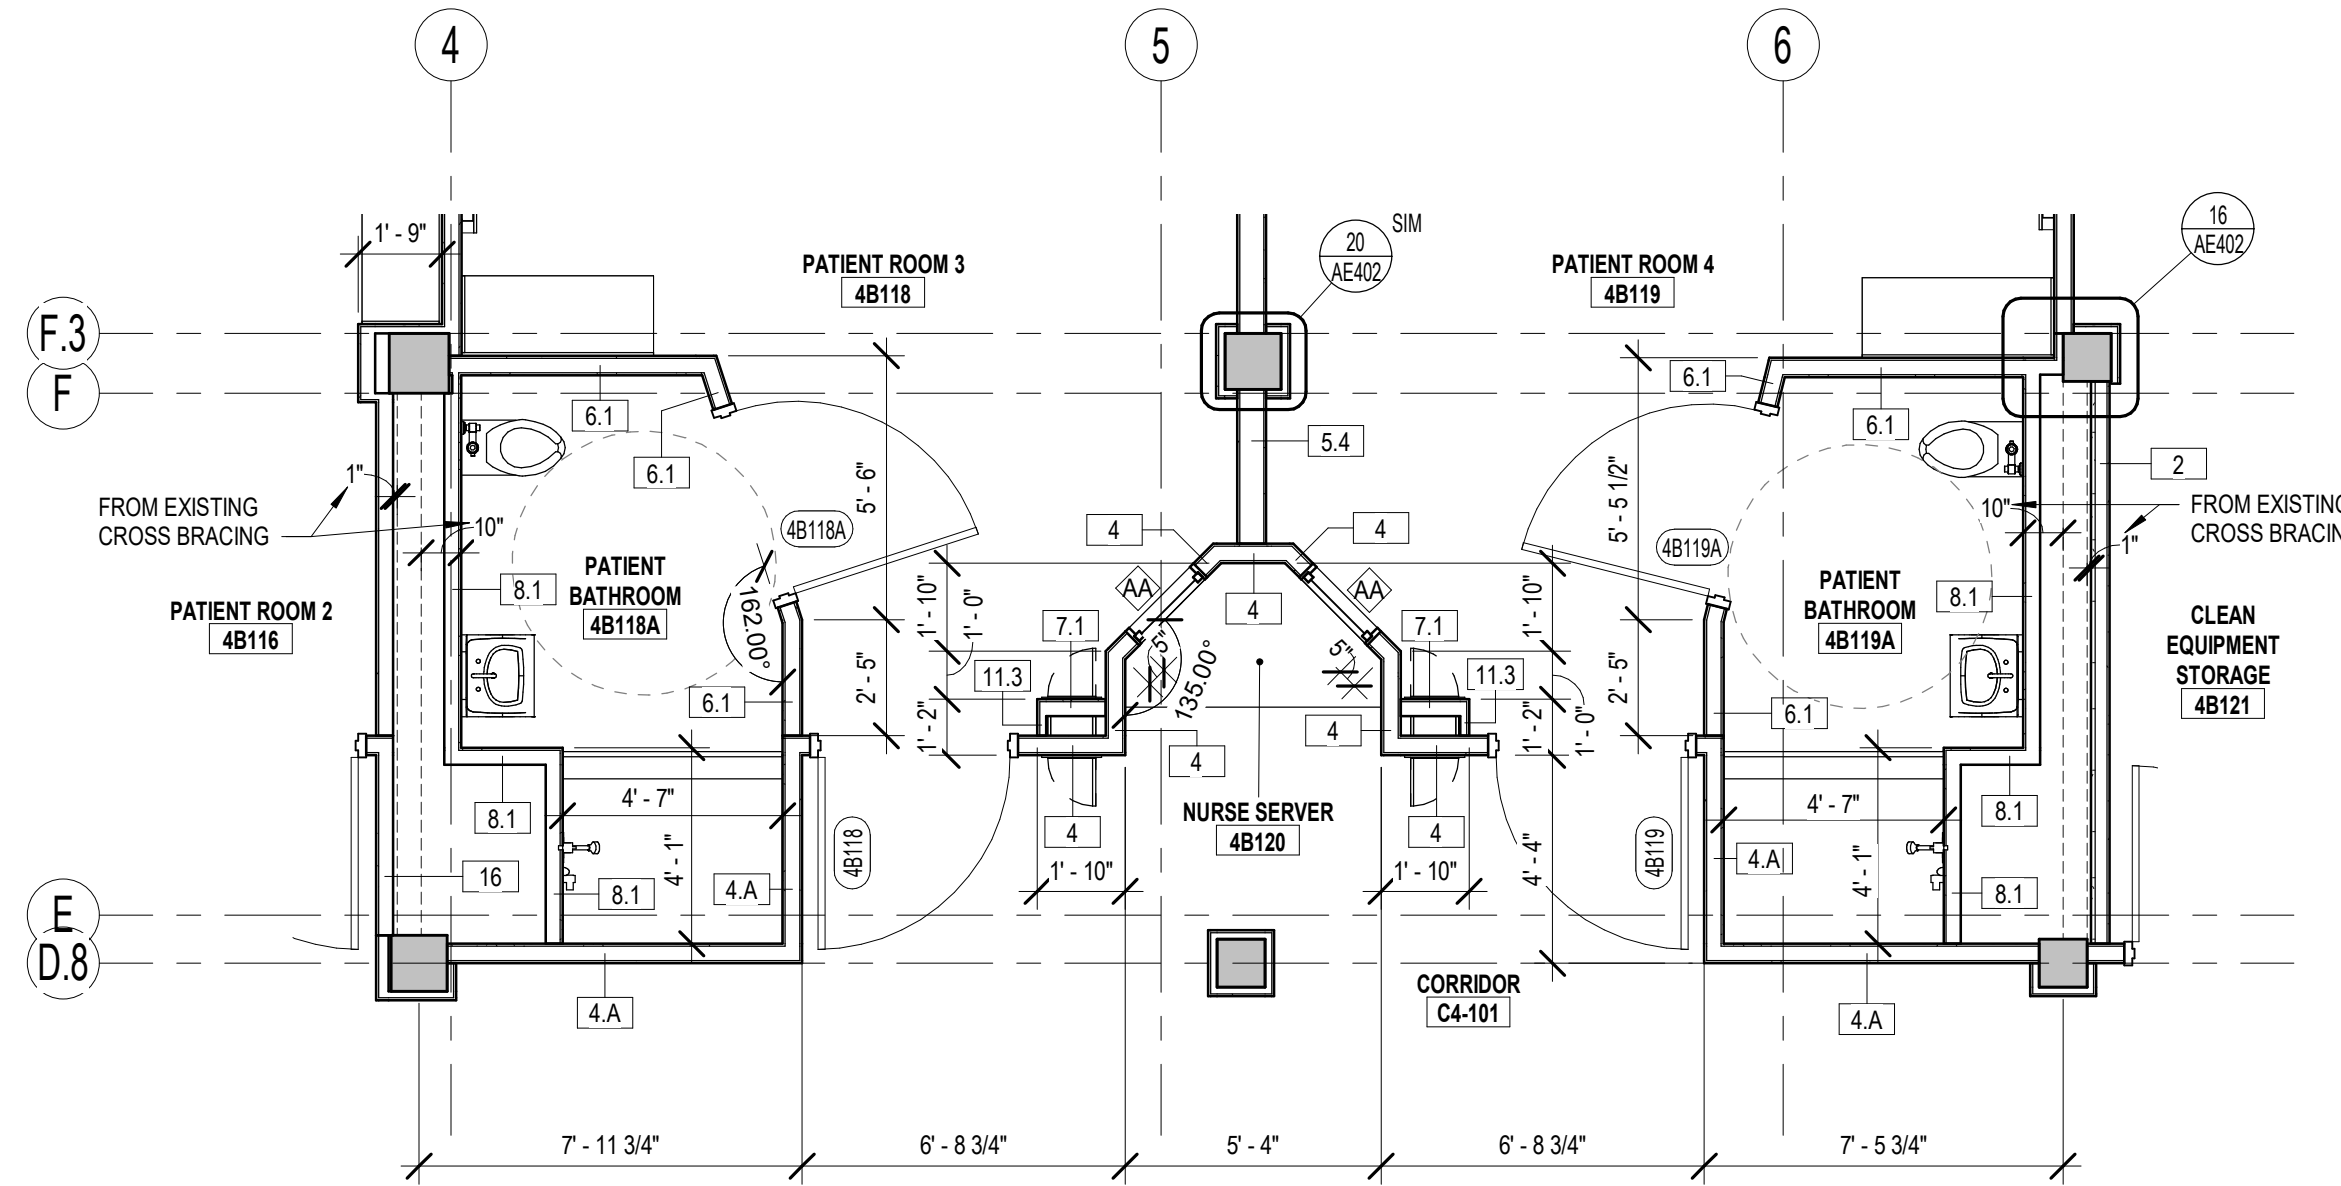


2 ENLARGED DIMENSION PLAN - 4B118A/4B119A
AE108.2 1/4" = 1'-0"

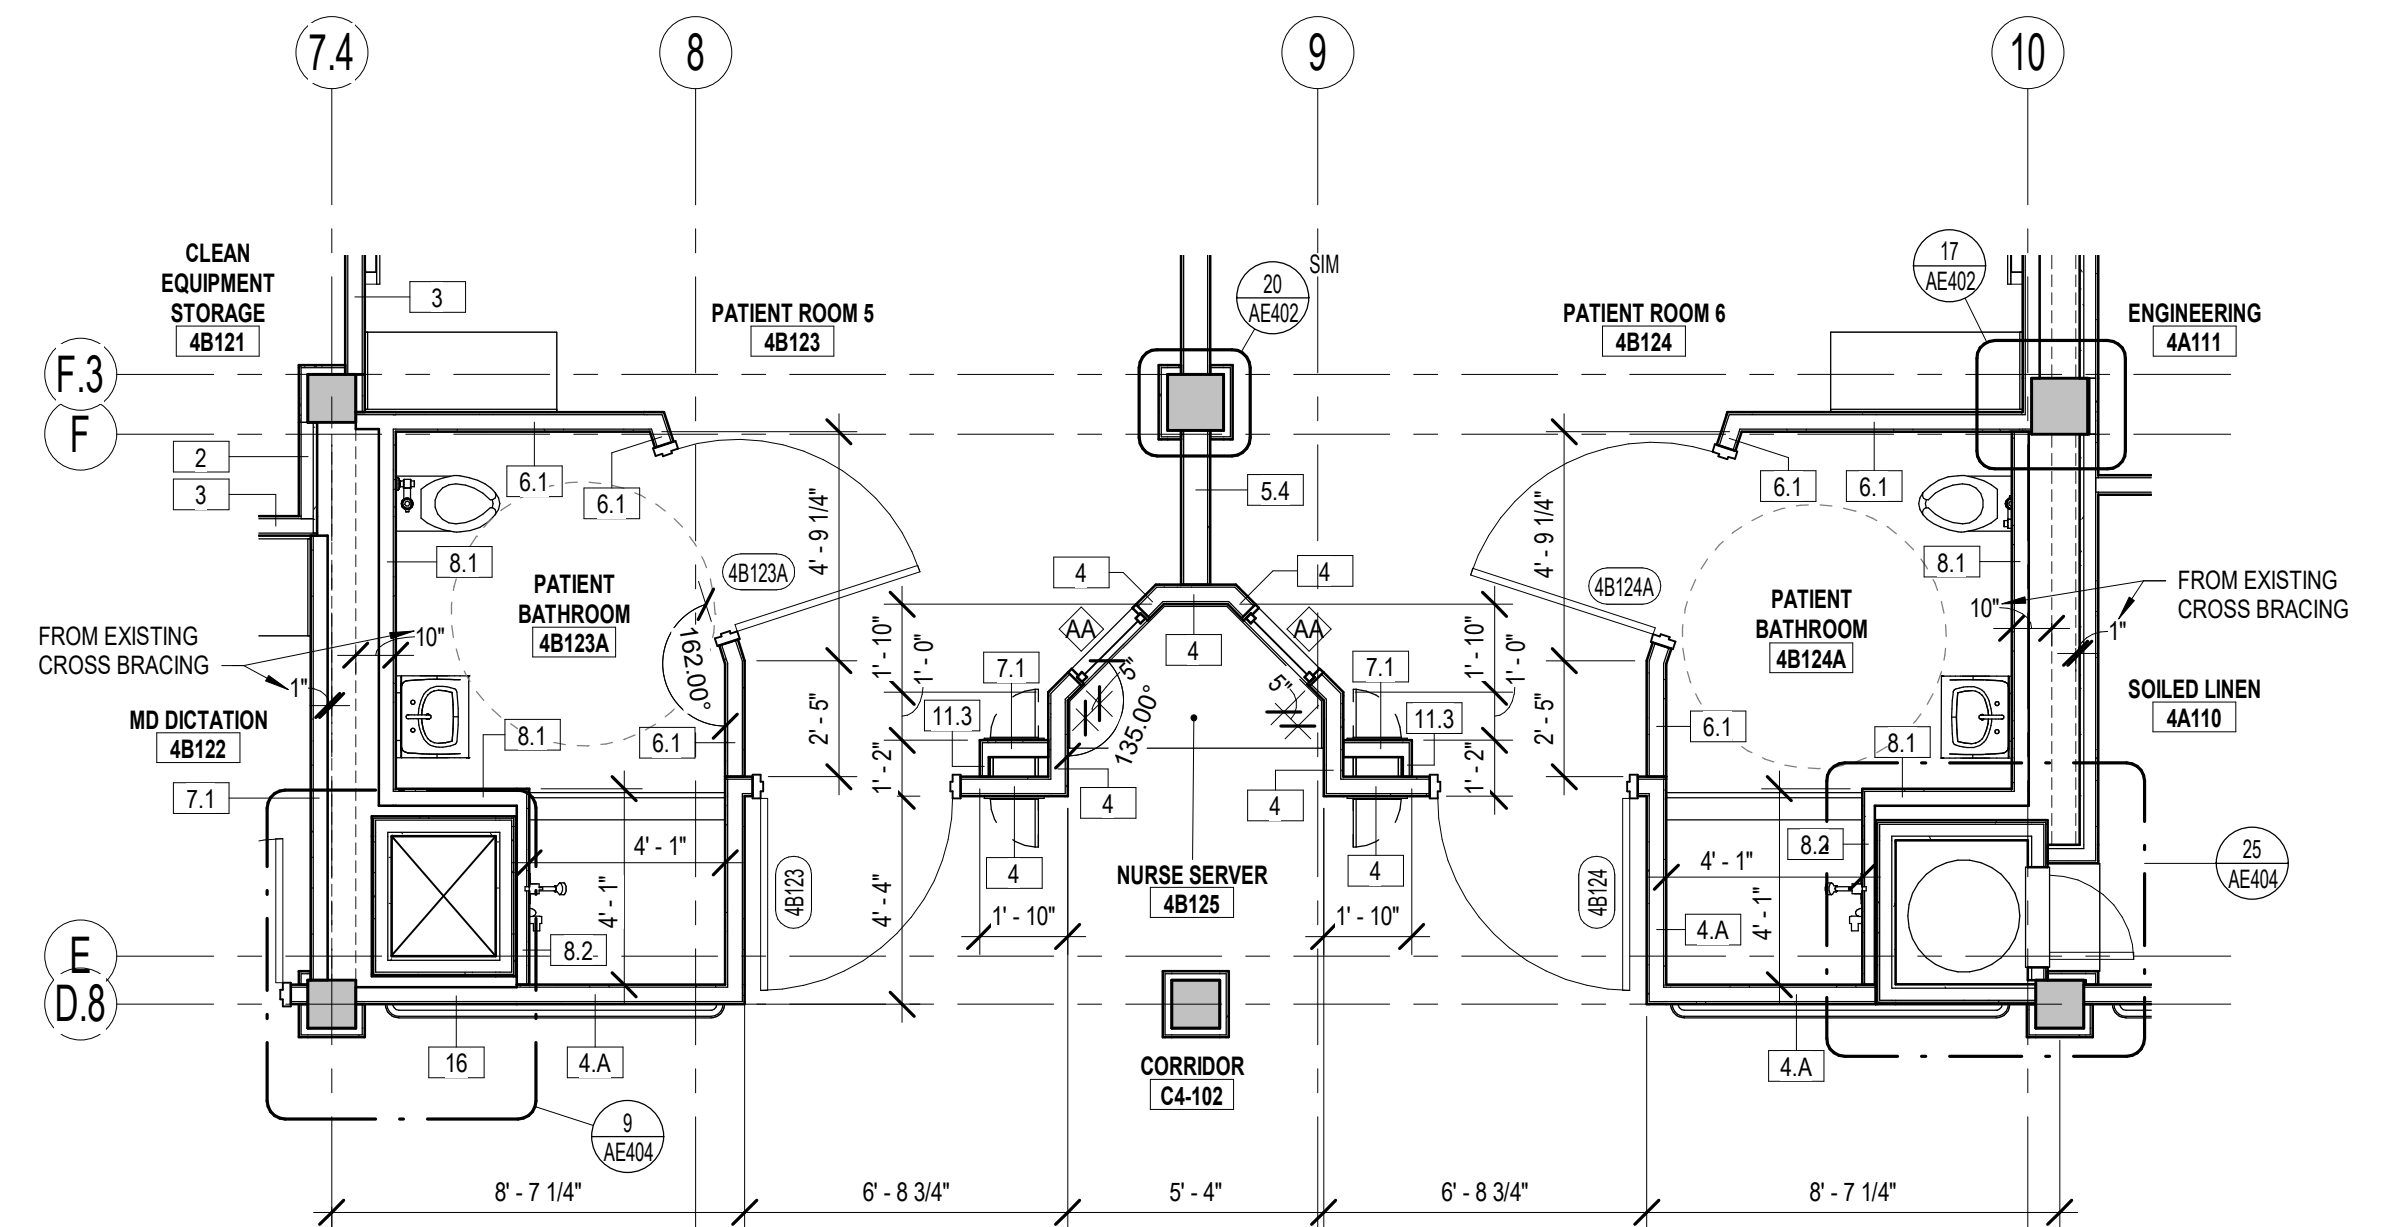


3 ENLARGED DIMENSION PLAN - 4B123A/4B124A
AE108.2 1/4" = 1'-0"

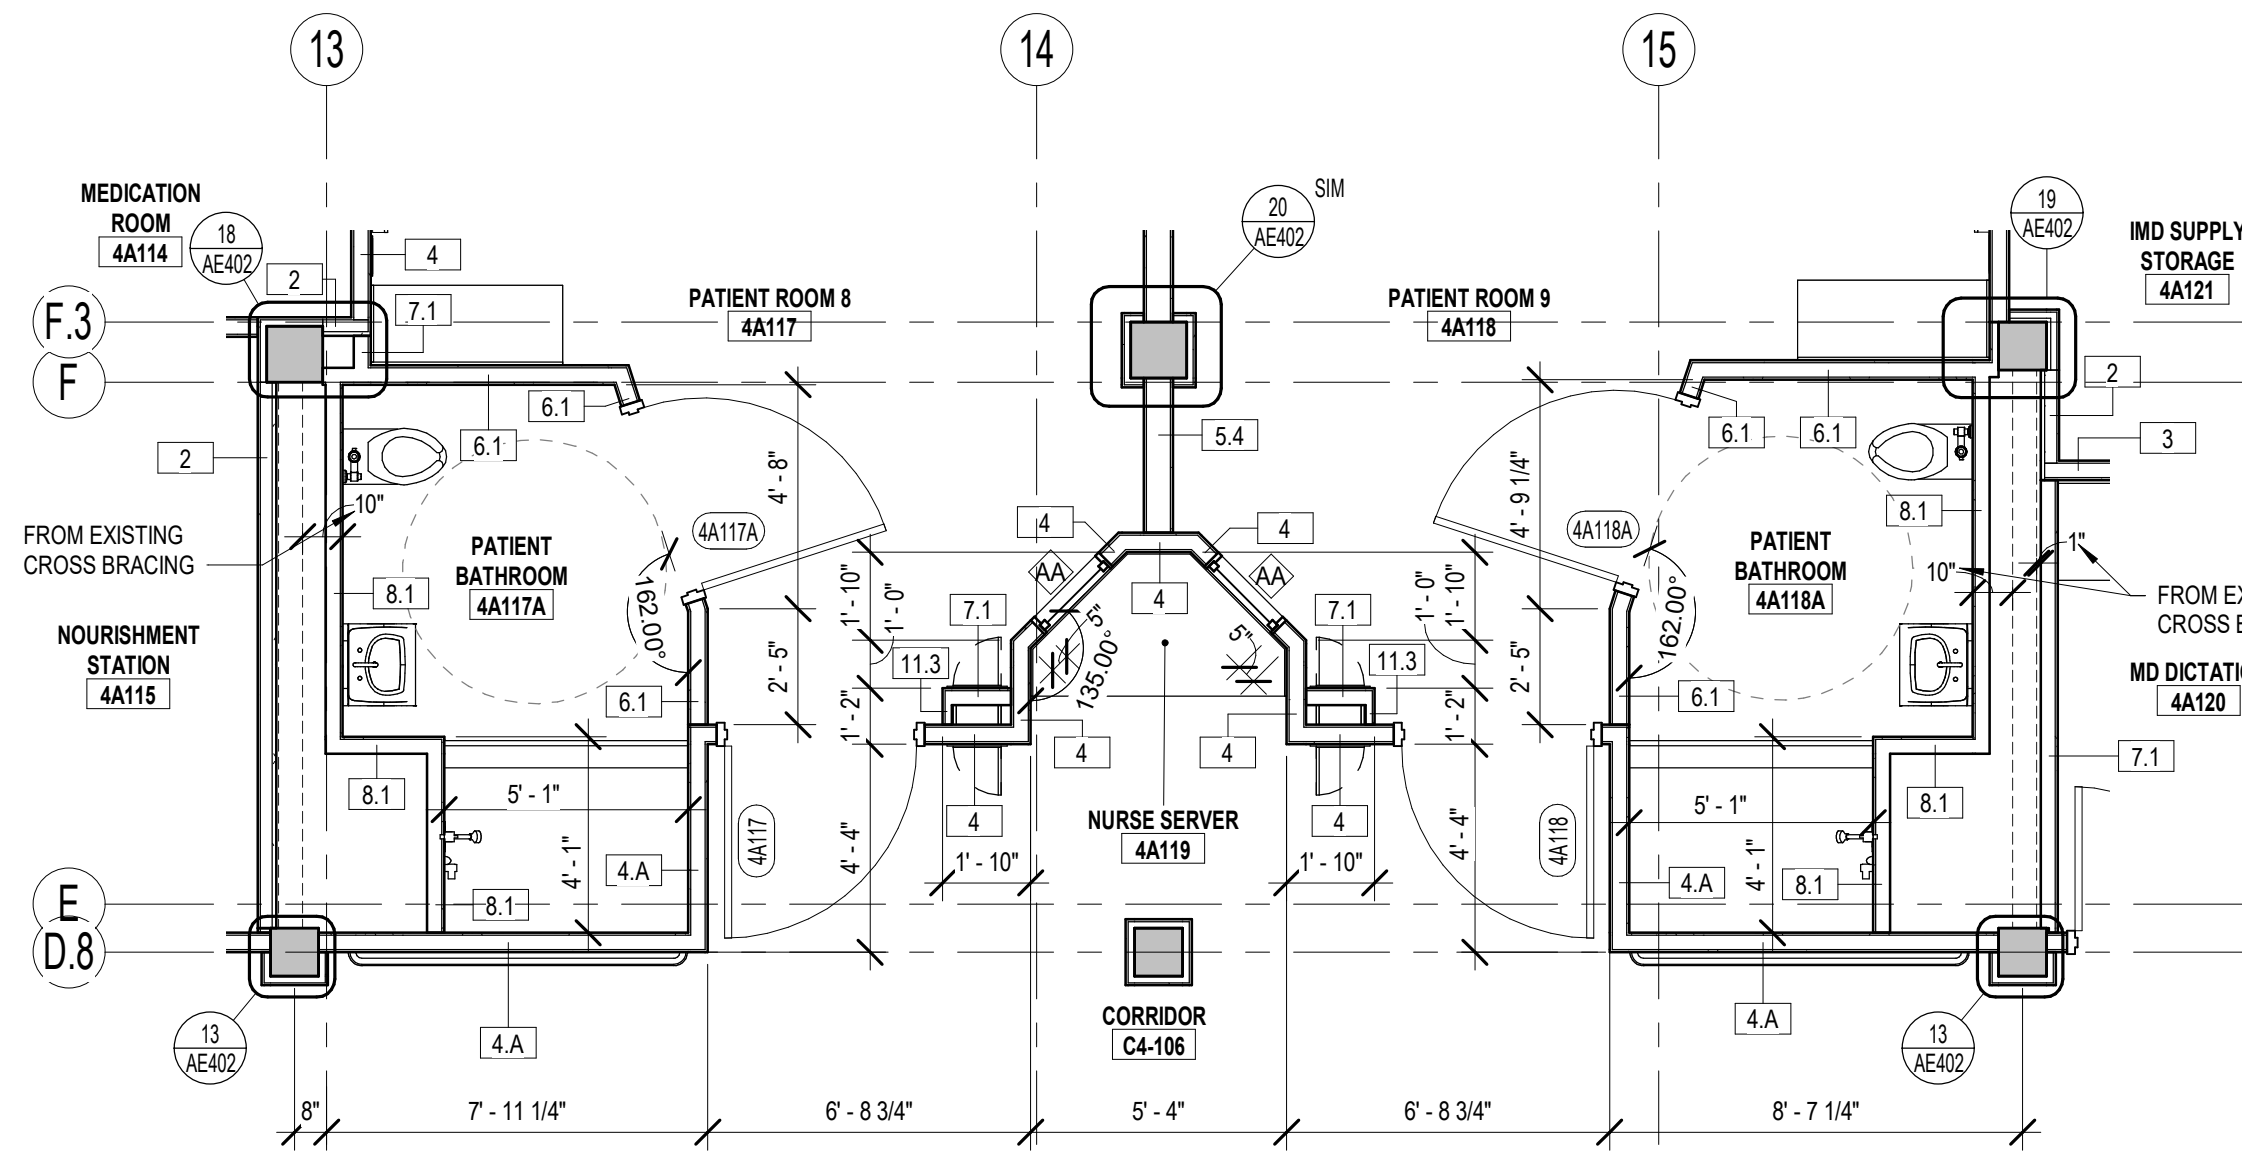


4 ENLARGED DIMENSION PLAN - 4A117A/4A118A
AE108.2 1/4" = 1'-0"

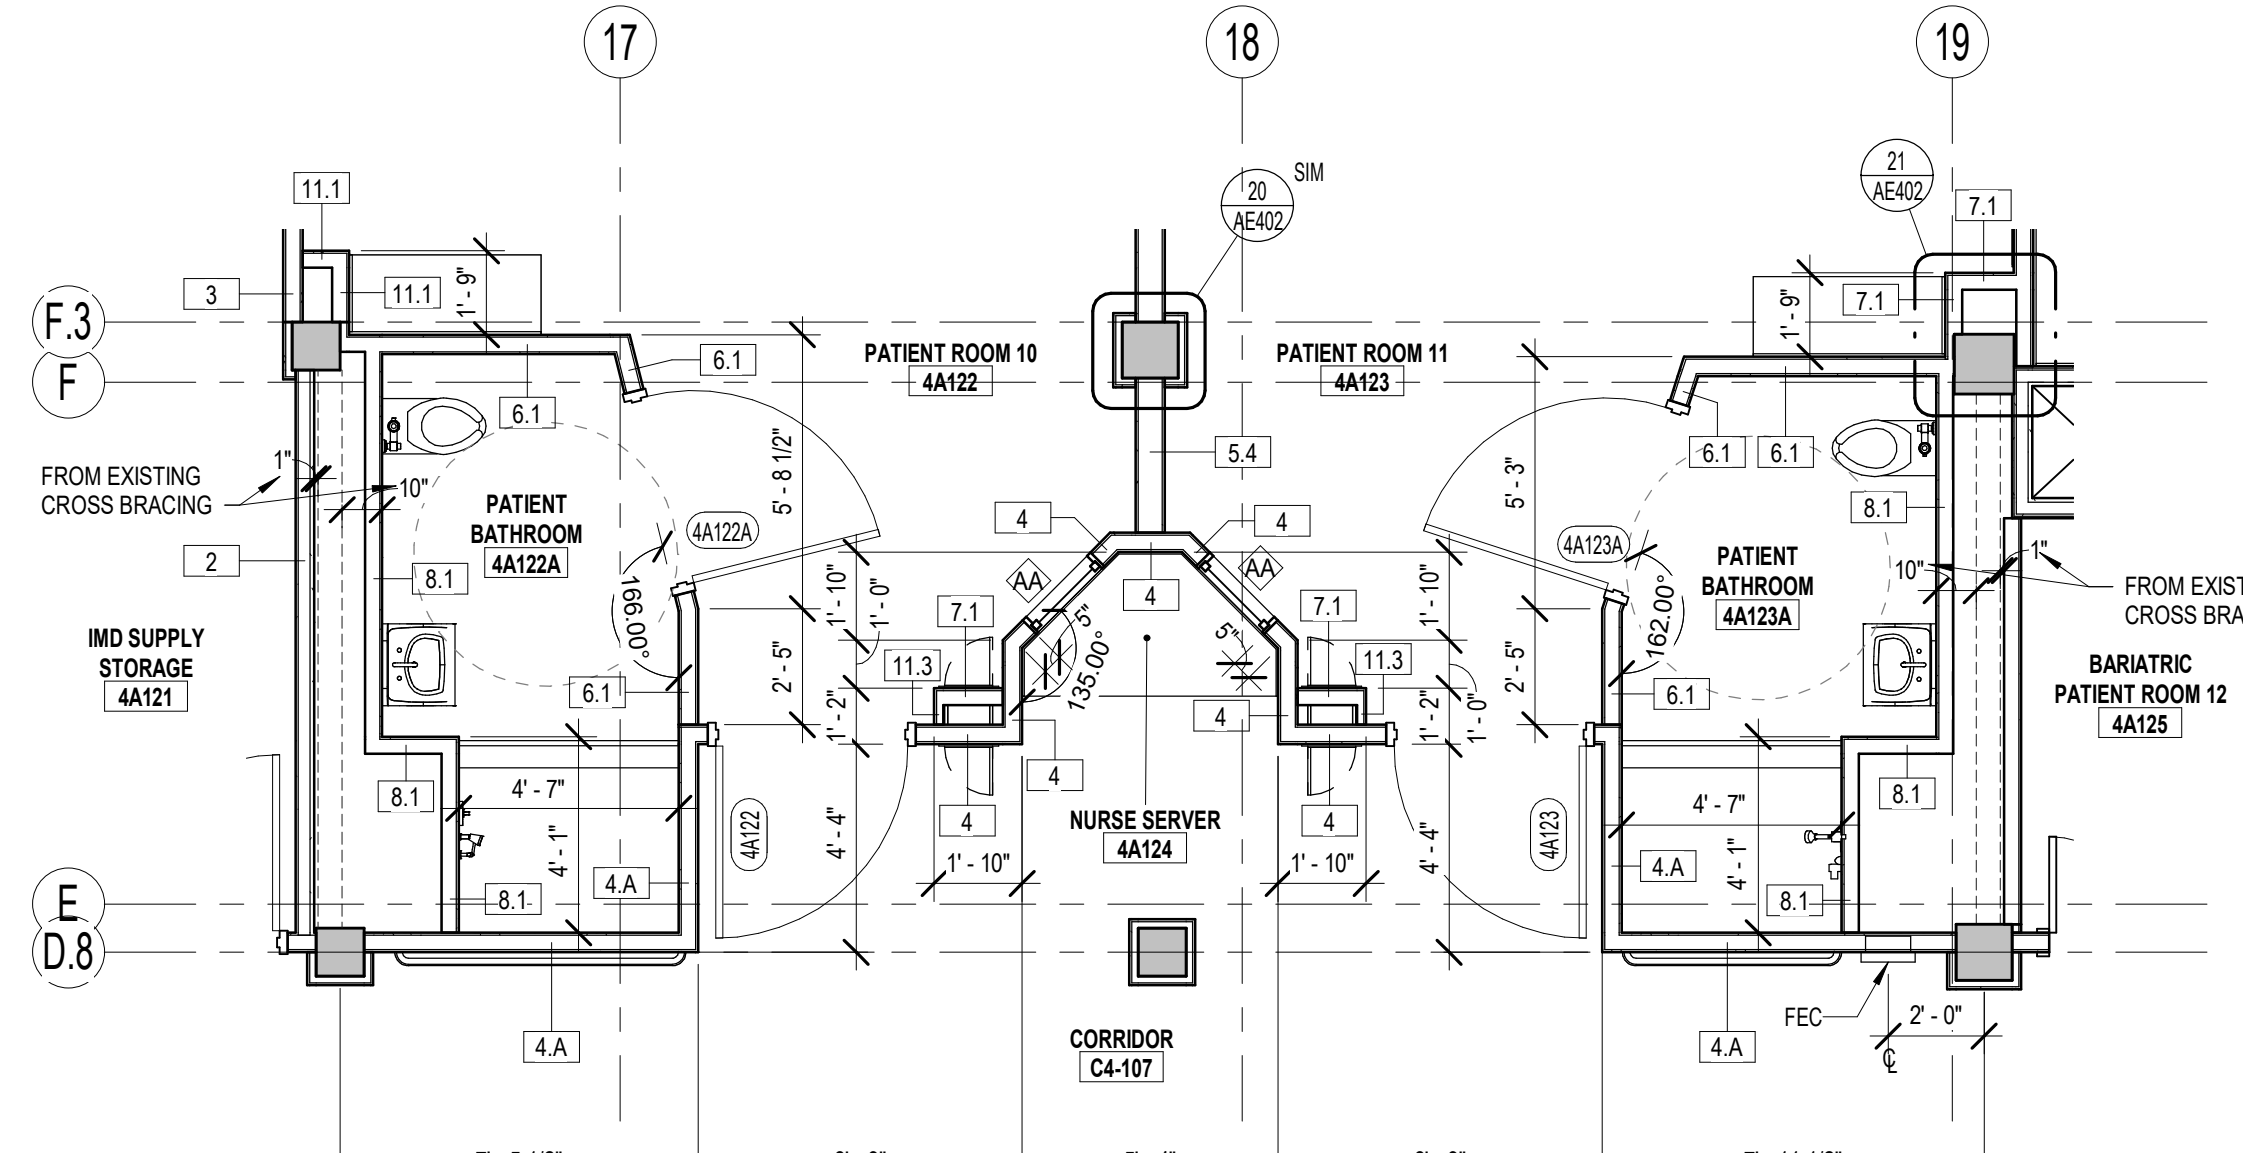


5 ENLARGED DIMENSION PLAN - 4A122A/4A123A
AE108.2 1/4" = 1'-0"

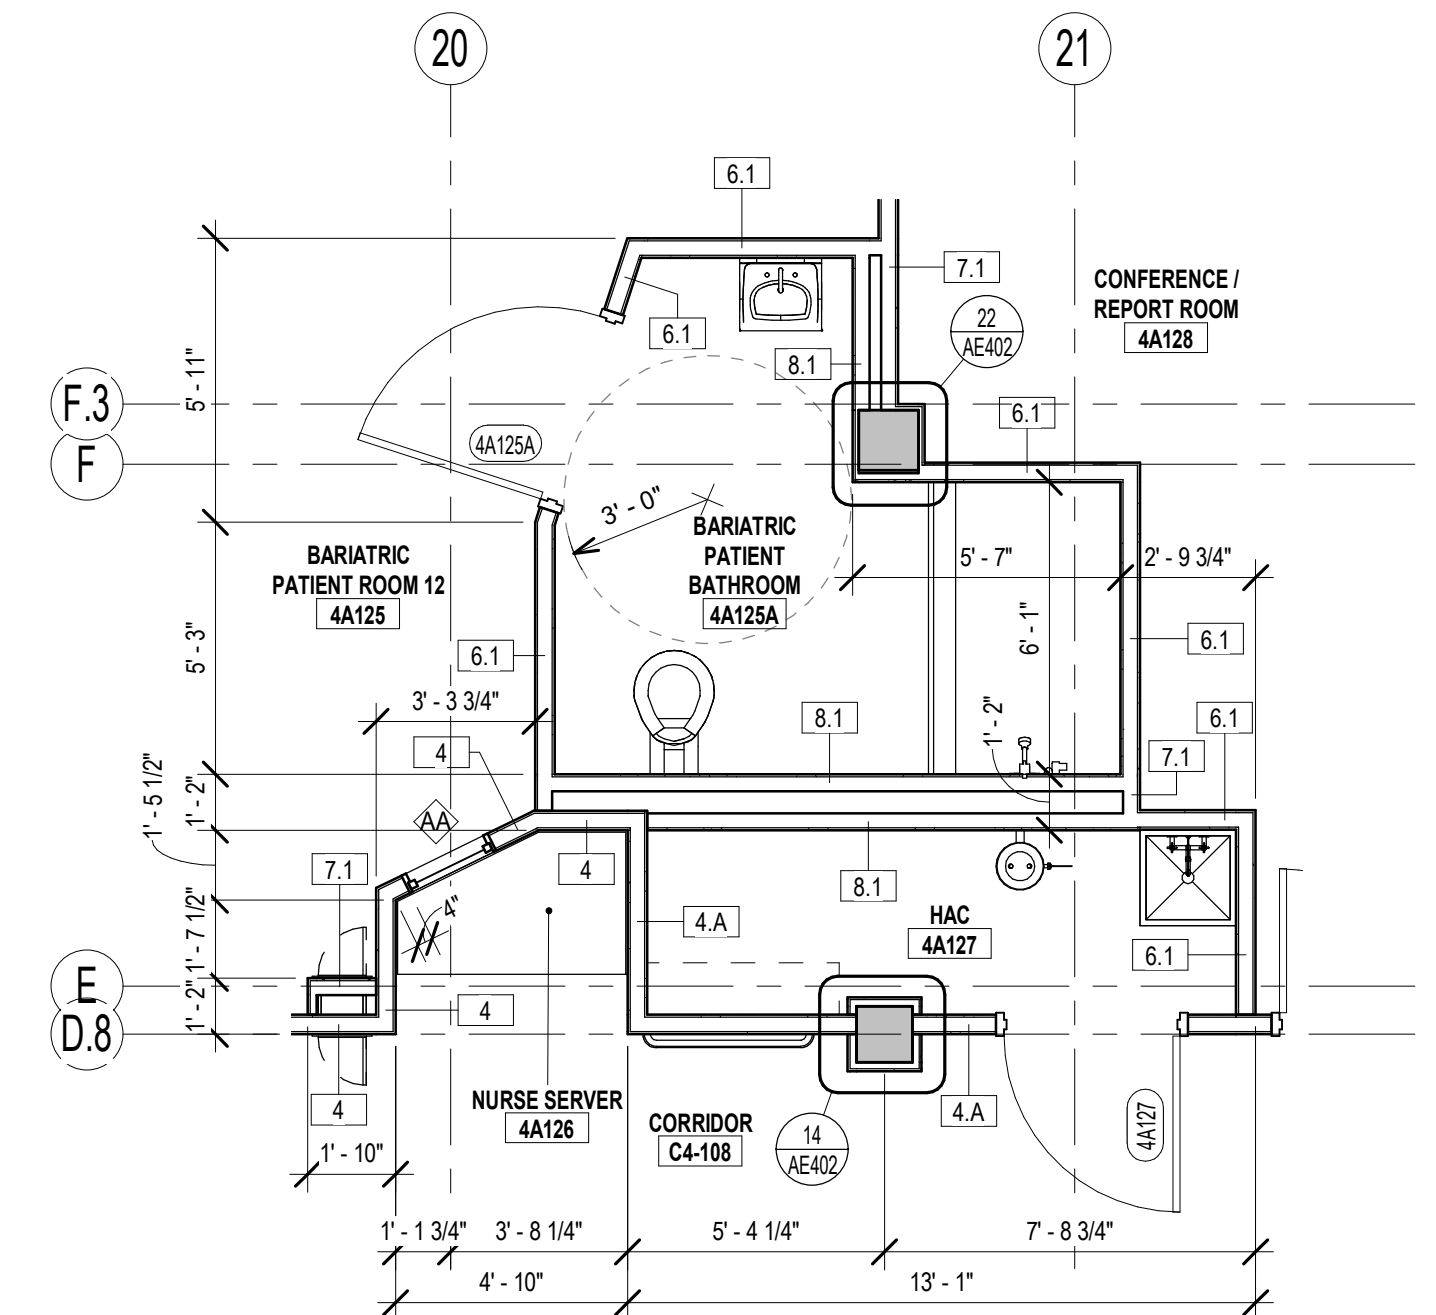


6 ENLARGED DIMENSION PLAN - 4A125A
AE108.2 1/4" = 1'-0"

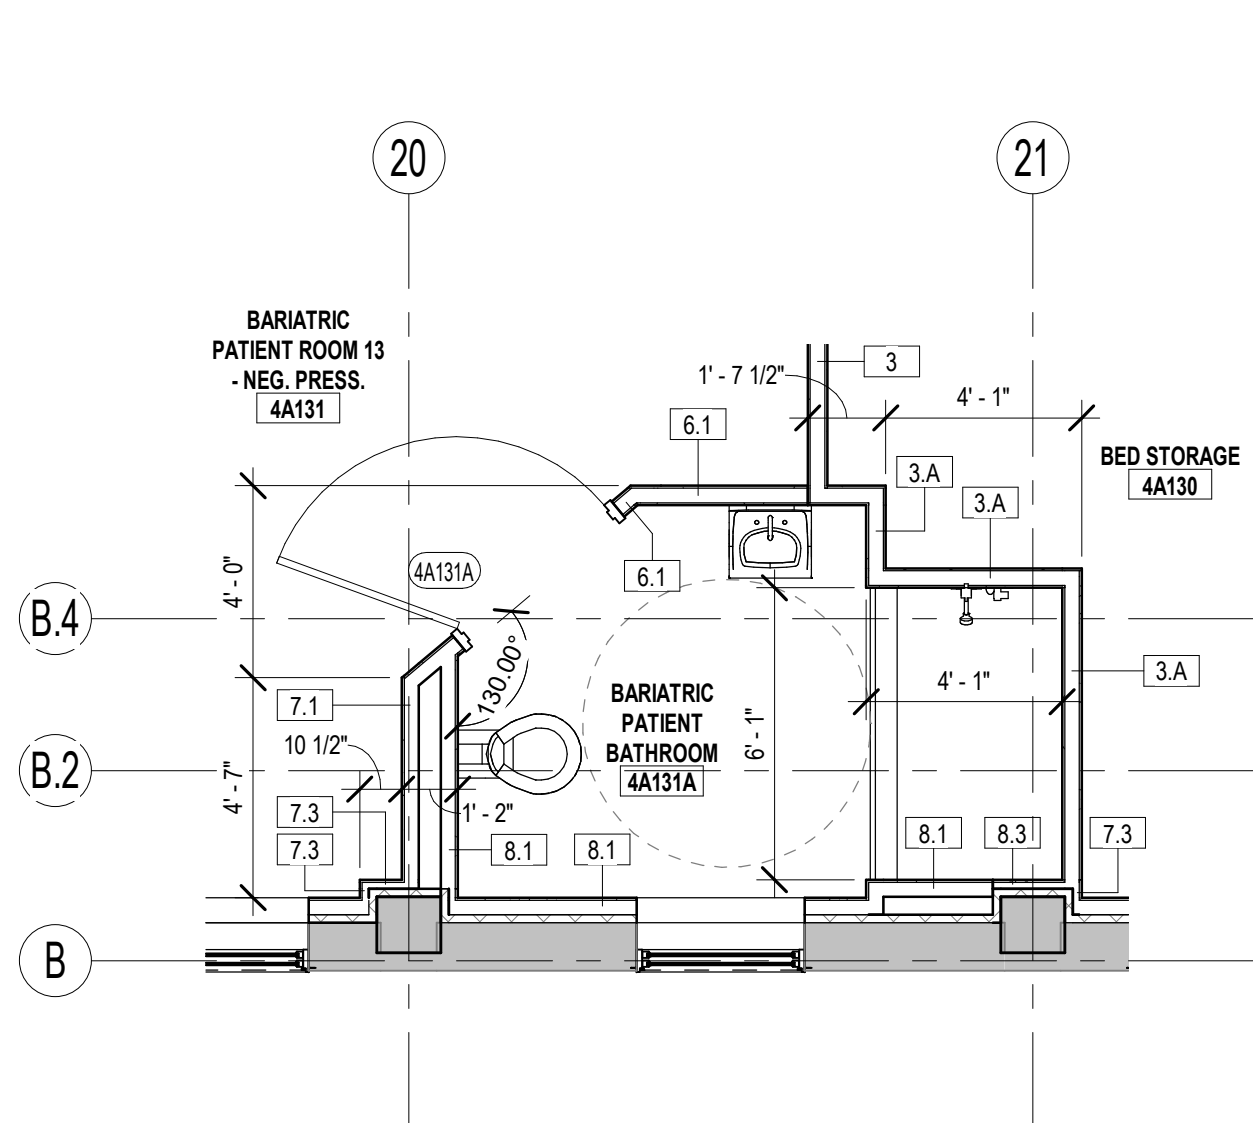


7 ENLARGED DIMENSION PLAN - 4A131A
AE108.2 1/4" = 1'-0"

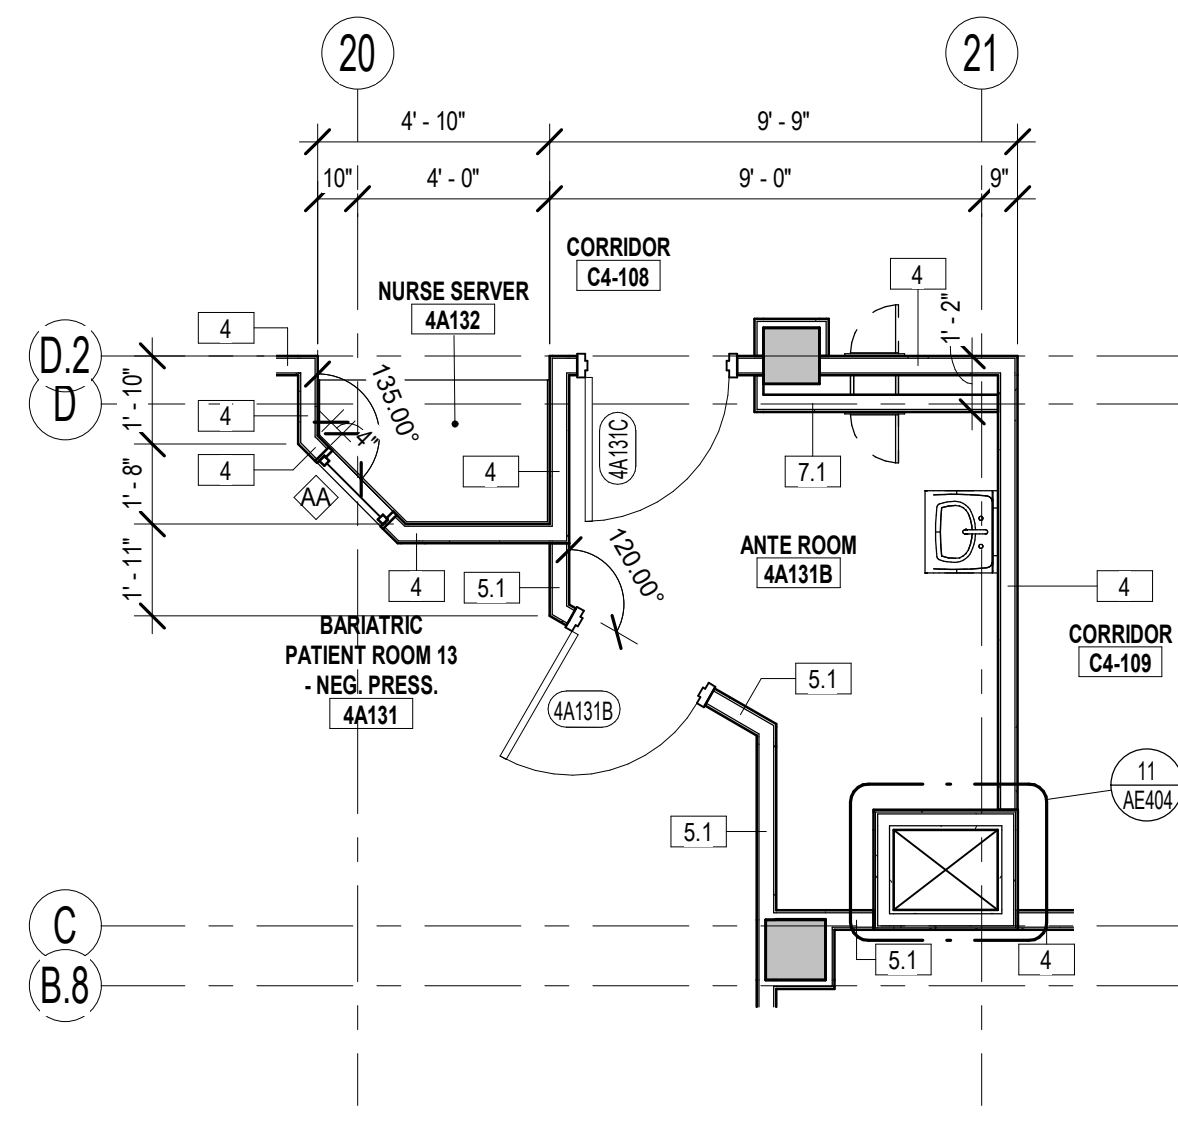

8 ENLARGED DIMENSION PLAN - 4A131B
AE108.2 1/4" = 1'-0"

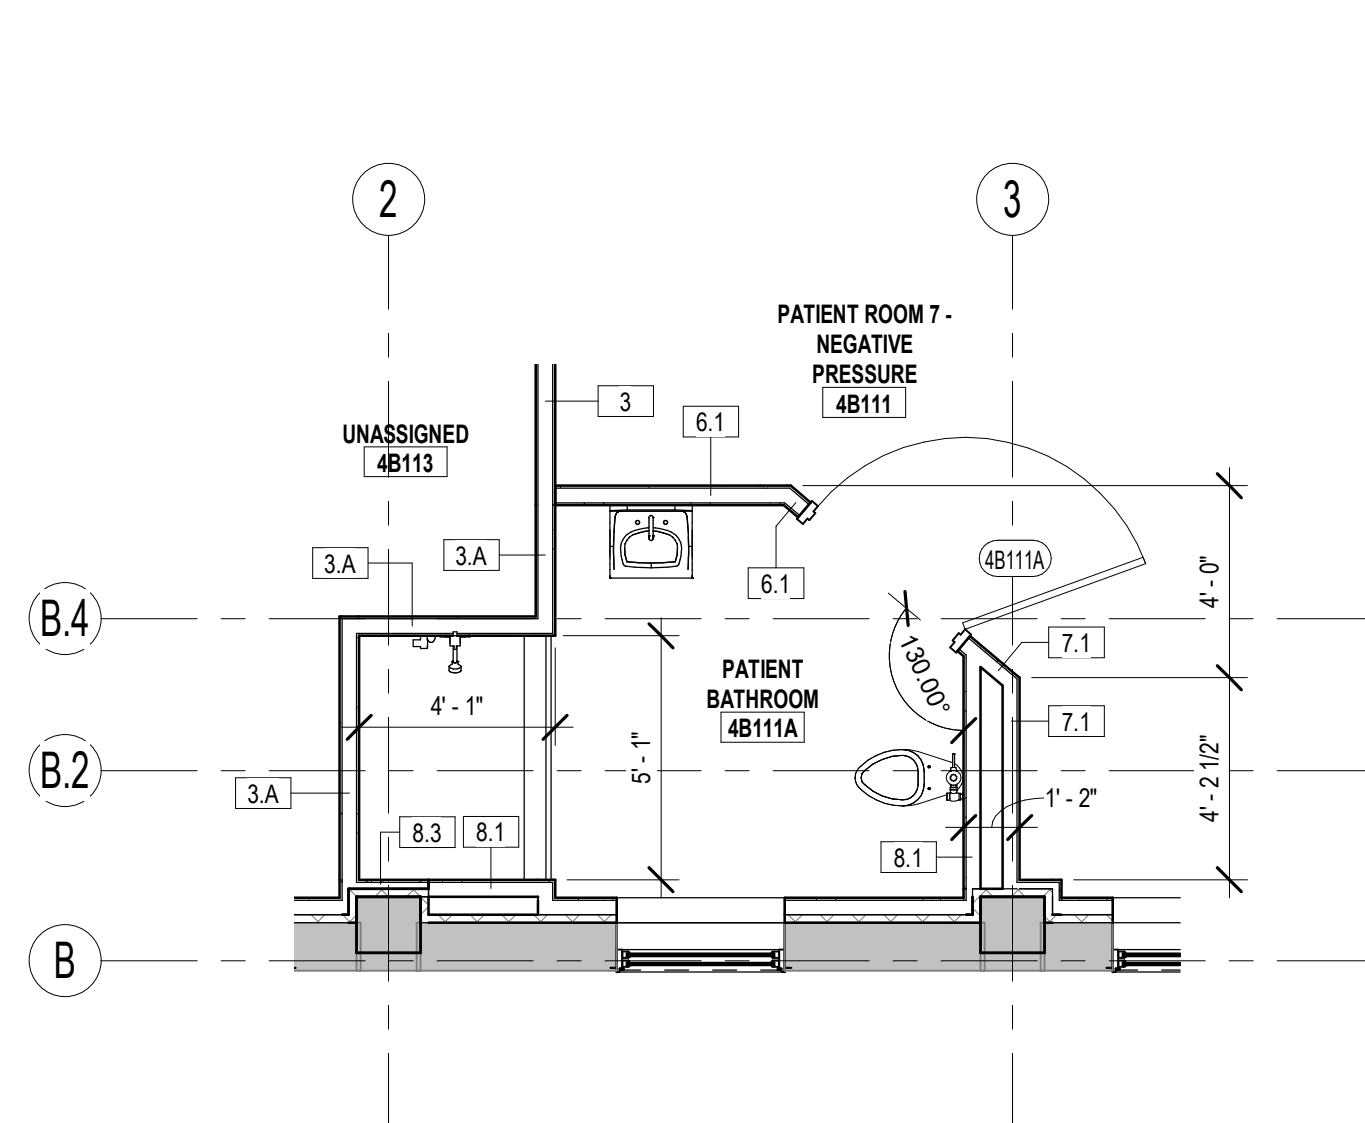

9 ENLARGED DIMENSION PLAN - 4B111A
AE108.2 1/4" = 1'-0"

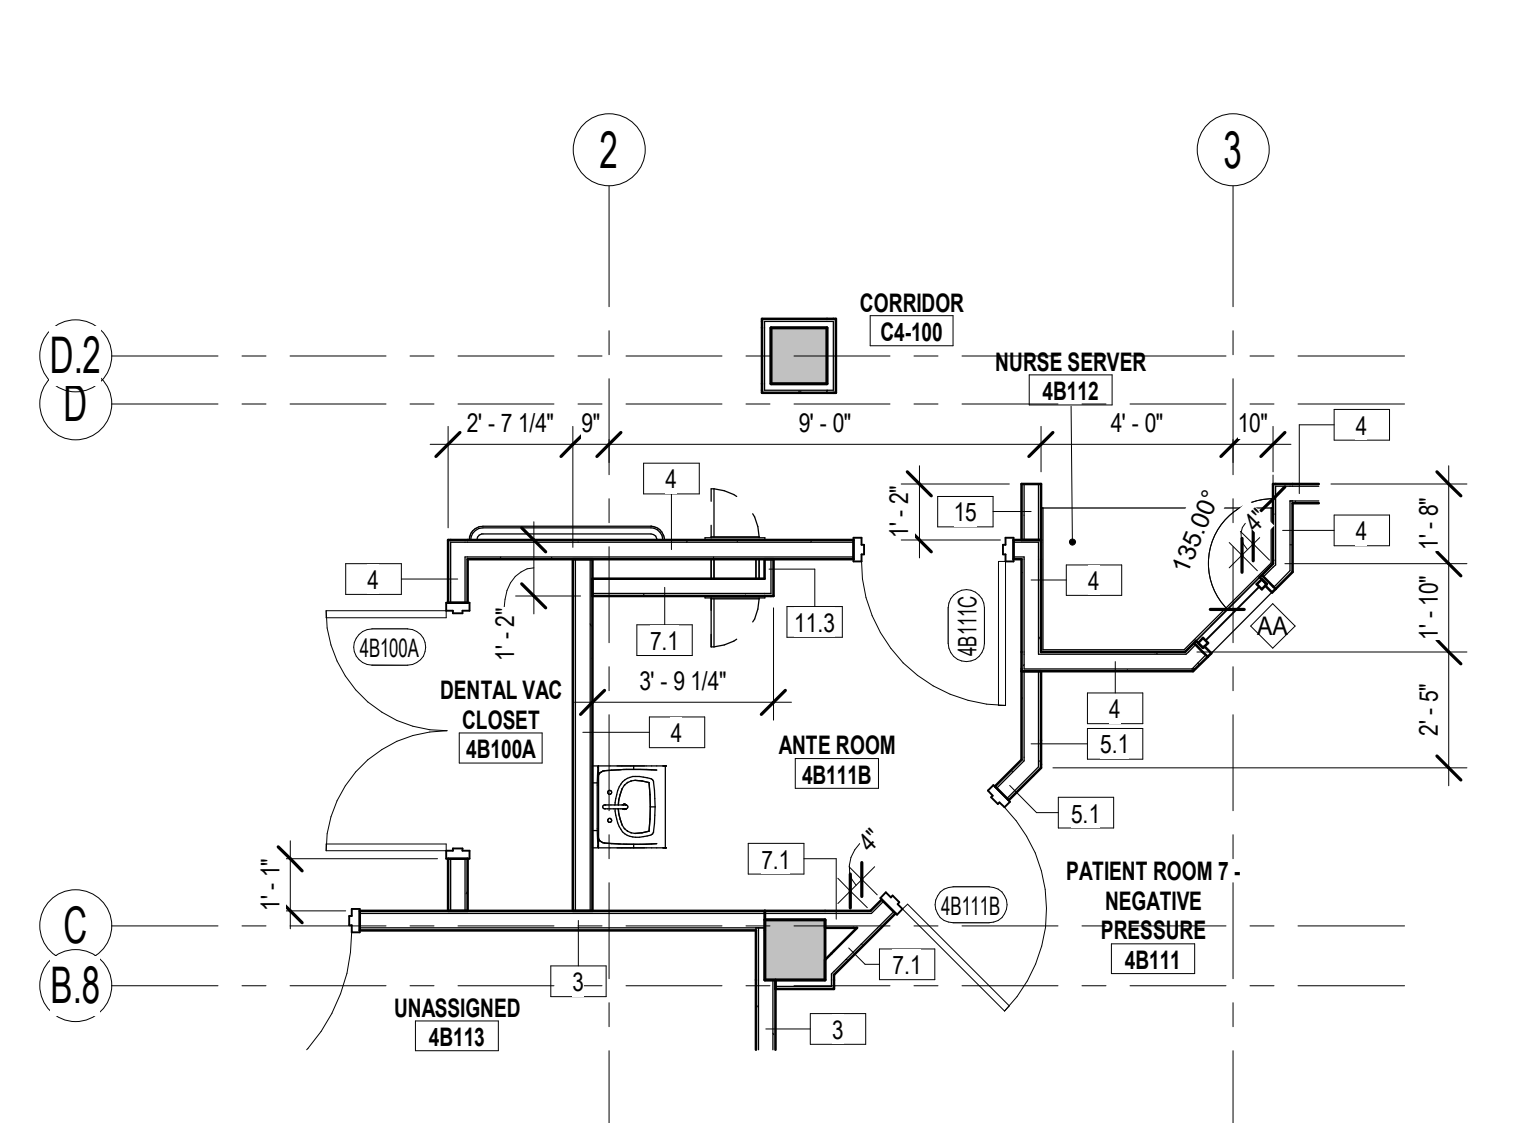

10 ENLARGED DIMENSION PLAN - 4B111B
AE108.2 1/4" = 1'-0"

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESAK, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP



Office of
Construction
and Facilities
Management

VA

U.S. Department
of Veterans
Affairs

Drawing Title
4TH FLOOR ENLARGED DIMENSION
PLANS

Approved:

Phase
CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

Project Title
RENOVATE BUILDING 1

Location
BILOXI, MISSISSIPPI

Issue Date
03/10/2023

Checked
Checker

Drawn
Author

Project Number
520-317X

Building Number
1

Drawing Number
AE108.2

Dwg. 70 of 238



NOTE: SEE SHEET "IN103" FOR INTERIOR ELEVATION REFERENCE

1 5TH FLOOR PLAN
1/8" = 1'-0"

5TH FLOOR SPACE TYPES	
1 - Administration	Reno
2 - Support/Infrastructure	4,580
3 - Ancillary/Diagnostic	2,444
4 - Specialty Care	3,253
5 - Common/Swing/Construction	5,006
Floor Total (GSF)	
Total Variance in Space	

KEYED NOTES THIS SHEET

- EXISTING EXHAUST DUCT TO REMAIN
- EXHAUST DUCT FLOORS - ATTIC. SEE STRUCTURAL FOR SLAB OPENING DETAILS.
- CENTER PARTITION ON MULLION CENTERLINE
- EXISTING LAUNDRY CHUTE TO BE MODIFIED FOR NEW OPENING
- PROVIDE VISION OBSCURING TREATMENT ON INNER GLASS SURFACE
- EXPANSION JOINT ASSEMBLY THIS LOCATION. SEE DETAIL 11/AE501 & SPEC SECTION 07 95 13
- SCRUB-X MACHINE (V)
- MODIFY STRUCTURAL CROSS BRACING TO ALLOW FOR 6'-0" OPENING. SEE STRUCTURAL DETAIL 1/S150.
- PATCH SURFACE OF EXISTING GYP BD/PLASTER SURFACES IN PREPARATION FOR FINISHES

FLOOR PLAN GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT AND RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDINGS AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF GYPSUM BOARD, BACKER BOARD, CMU, CAST IN PLACE CONCRETE COLUMNS OR FINISHED FACE OF EXISTING WALLS UNLESS OTHERWISE NOTED.
- GYPSUM BOARD CONTROL JOINTS (GCJ) 30'-0" O.C. MAX. UNLESS NOTED OTHERWISE.
- FIRE EXTINGUISHER CABINETS ARE DENOTED ON THE FLOOR PLANS AS FEC; WALL MOUNTED FIRE EXTINGUISHERS ARE DENOTED ON THE PLANS AS (FE). SEE SHEET G102-G105 FOR FIRE EXTINGUISHER LOCATIONS AND AEE601 FOR FIRE CABINET DETAILS.
- LAYOUT OF RATED PARTITIONS IS SHOWN ON THE LIFE SAFETY PLAN SHEET G102-G104.
- SEE SHEET AEA601 (PARTITION TYPES) FOR PARTITION COMPONENTS AND WALL THICKNESS.
- ALL DOOR FRAMES ARE 2" OFF OF ADJACENT WALL UNLESS NOTED OTHERWISE.
- AT ALL EXISTING SLAB PENETRATIONS THAT ARE NOT BEING REUSED, INFILL HOLES ACCORDING TO STRUCTURAL DETAILS AND REQUIREMENTS.
- SEE G102, AE121, AE122 AND AE123 FOR SHOWER RECEPTOR TYPES

FLOOR PLAN LEGEND

- EXISTING TO REMAIN
- CONSTRUCTION
- FIRE EXTINGUISHER CABINET

GRAPHIC LEGEND

- | ROOM NAME | ROOM DESIGNATION |
|-----------|------------------------------|
| 101 | 100 SF |
| 101 | WALL PARTITION TYPE |
| 101 | DOOR OPENING |
| 101 | CURTAINWALL/ WINDOW TYPE |
| 101 | COLUMN GRID LINE |
| 101 | DETAIL |
| 101 | EXTERIOR/ INTERIOR ELEVATION |
| 101 | BUILDING/ DETAIL SECTION |
| 101 | FLOOR DRAIN |
| 101 | KEYNOTE |
| 101 | EQUIPMENT TAG |
| 101 | CENTER LINE |
| 101 | NORTH ARROW |
| 101 | GRAPHIC SCALE |

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESACK, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP



Office of
Construction
and Facilities
Management



U.S. Department
of Veterans
Affairs

Drawing Title

5TH FLOOR PLAN - BUILDOUT

Approved:

Phase

CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

Project Title

RENOVATE BUILDING 1

Location

BILOXI, MISSISSIPPI

Issue Date

03/10/2023

Checked

LA

Drawn

CD,PC

Project Number

520-317X


Building Number

1

Drawing Number


AE109

Dwg. 71 of 238

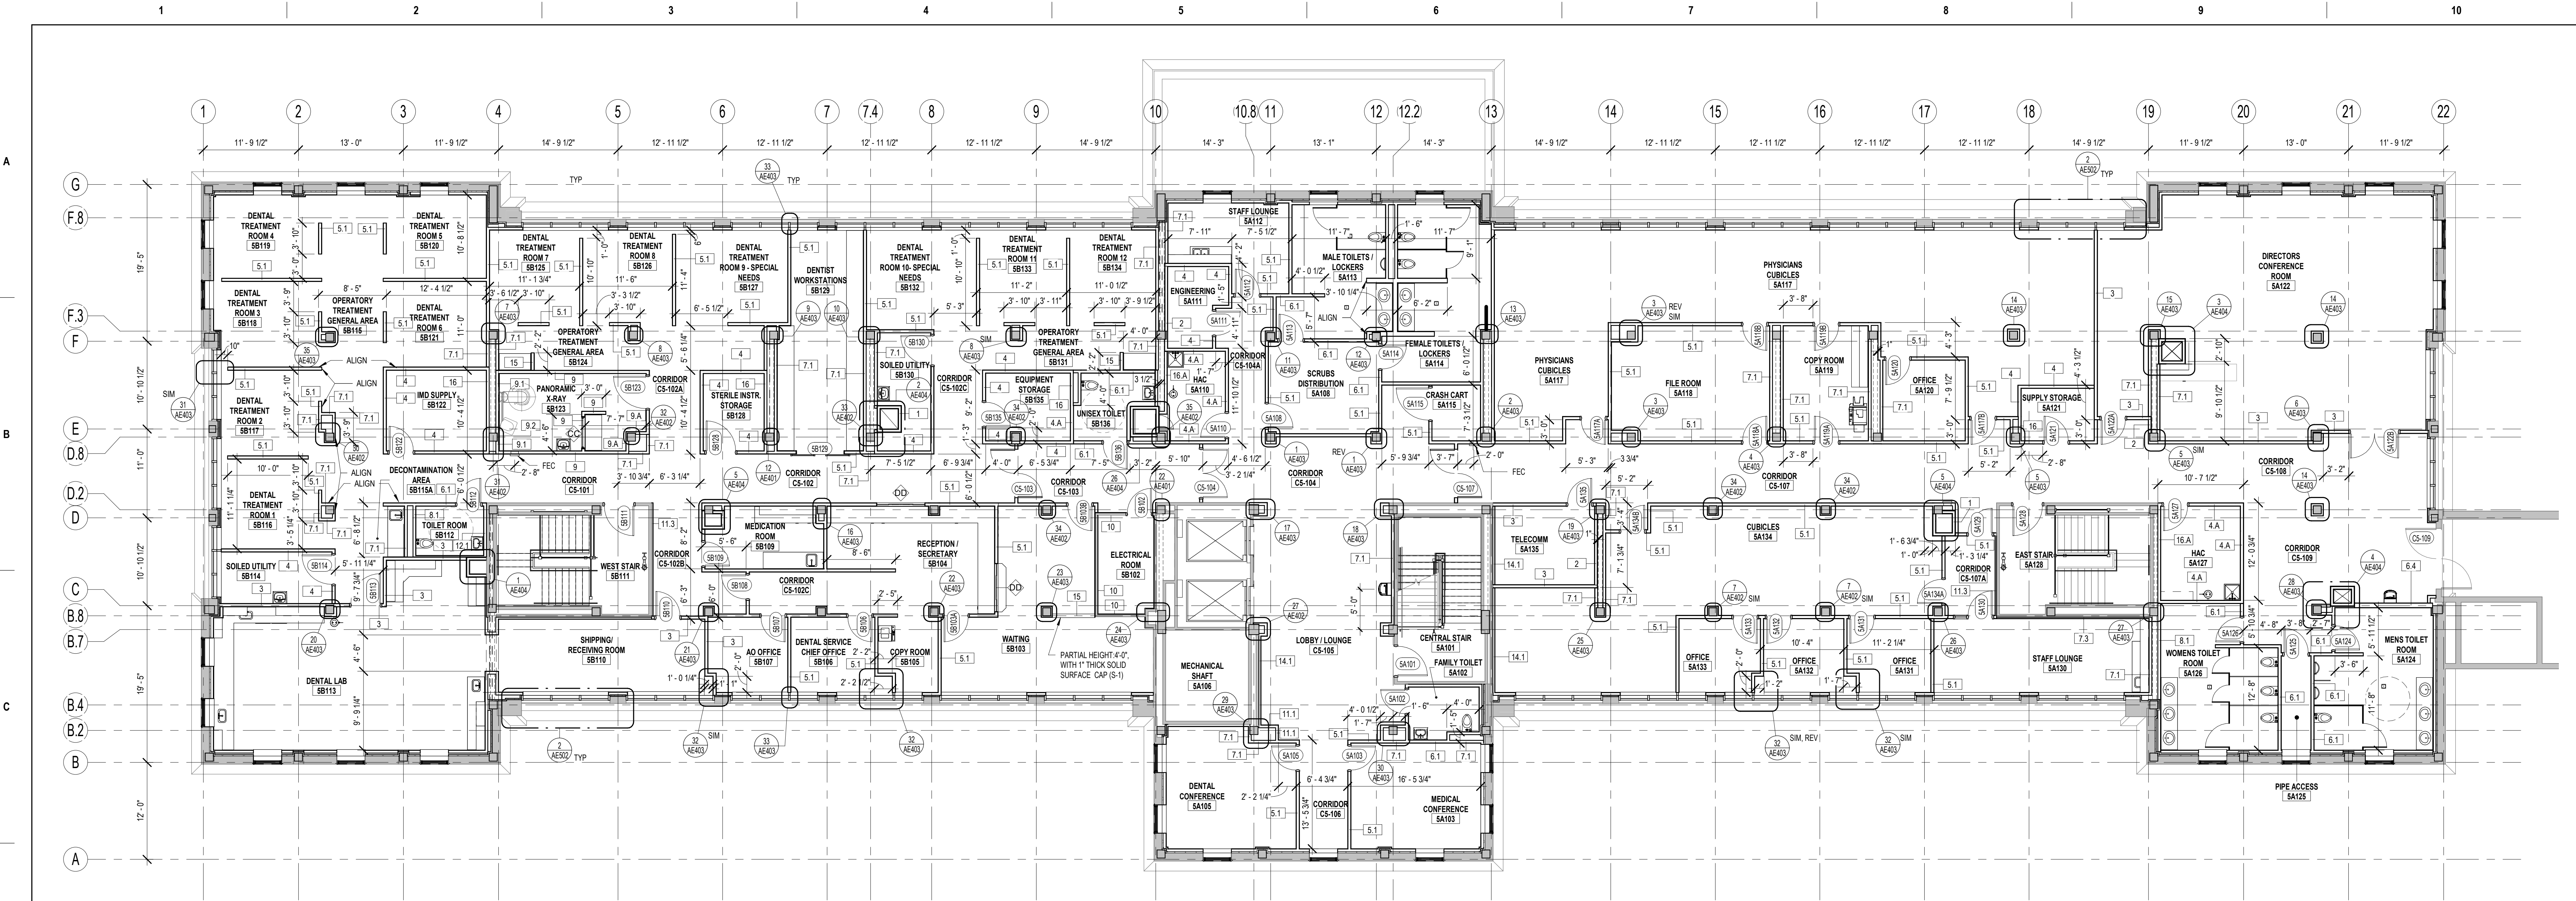

NOTE: SEE SHEET "IN103" FOR INTERIOR ELEVATION REFERENCE

1 5TH FLOOR PLAN
AE109.1 1/8" = 1'-0"



DIMENSION PLAN GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT AND RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDINGS AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF GYPSUM BOARD, BACKER BOARD, CMU, CAST IN PLACE CONCRETE COLUMNS OR FINISHED FACE OF EXISTING WALLS UNLESS OTHERWISE NOTED.
- GYPSUM BOARD CONTROL JOINTS (GCJ) 30'-0" O.C. MAX. UNLESS NOTED OTHERWISE.
- FIRE EXTINGUISHER CABINETS ARE DENOTED ON THE FLOOR PLANS AS FEC; WALL MOUNTED FIRE EXTINGUISHERS ARE DENOTED ON THE PLANS AS (FE). SEE SHEET G102-G104 FOR FIRE EXTINGUISHER LOCATIONS AND AE601 FOR FIRE CABINET DETAILS.
- LAYOUT OF RATED PARTITIONS IS SHOWN ON THE LIFE SAFETY PLAN SHEET G102-G104.
- SEE SHEET AE601 (PARTITION TYPES) FOR PARTITION COMPONENTS AND WALL THICKNESS.
- SEE G102, AE121, AE122 AND AE123 FOR SHOWER RECEPTOR TYPES

DIMENSION PLAN LEGEND

- EXISTING TO REMAIN
- CONSTRUCTION
- FIRE EXTINGUISHER CABINET

GRAPHIC LEGEND

ROOM NAME	ROOM DESIGNATION
101	100 SF
XXX	WALL PARTITION TYPE
101	DOOR OPENING
101	CURTAINWALL/ WINDOW TYPE
6.2	COLUMN GRID LINE
101	DETAIL
101	EXTERIOR/ INTERIOR ELEVATION
101	BUILDING/ DETAIL SECTION
101	FLOOR DRAIN
101	KEYNOTE
101	EQUIPMENT TAG
101	CENTER LINE
101	NORTH ARROW
0 4' 8' 16'	
GRAPHIC SCALE	

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESAC, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP



Office of
Construction
and Facilities
Management

VA U.S. Department
of Veterans
Affairs

Drawing Title
5TH FLOOR DIMENSION PLAN

Approved:

Phase
CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

Project Title
RENOVATE BUILDING 1

Location
BILOXI, MISSISSIPPI

Issue Date
03/10/2023

Checked
Checker


Drawn
Author

Project Number
520-317X

Building Number
1


Drawing Number
AE109.1

Dwg. 72 of 238

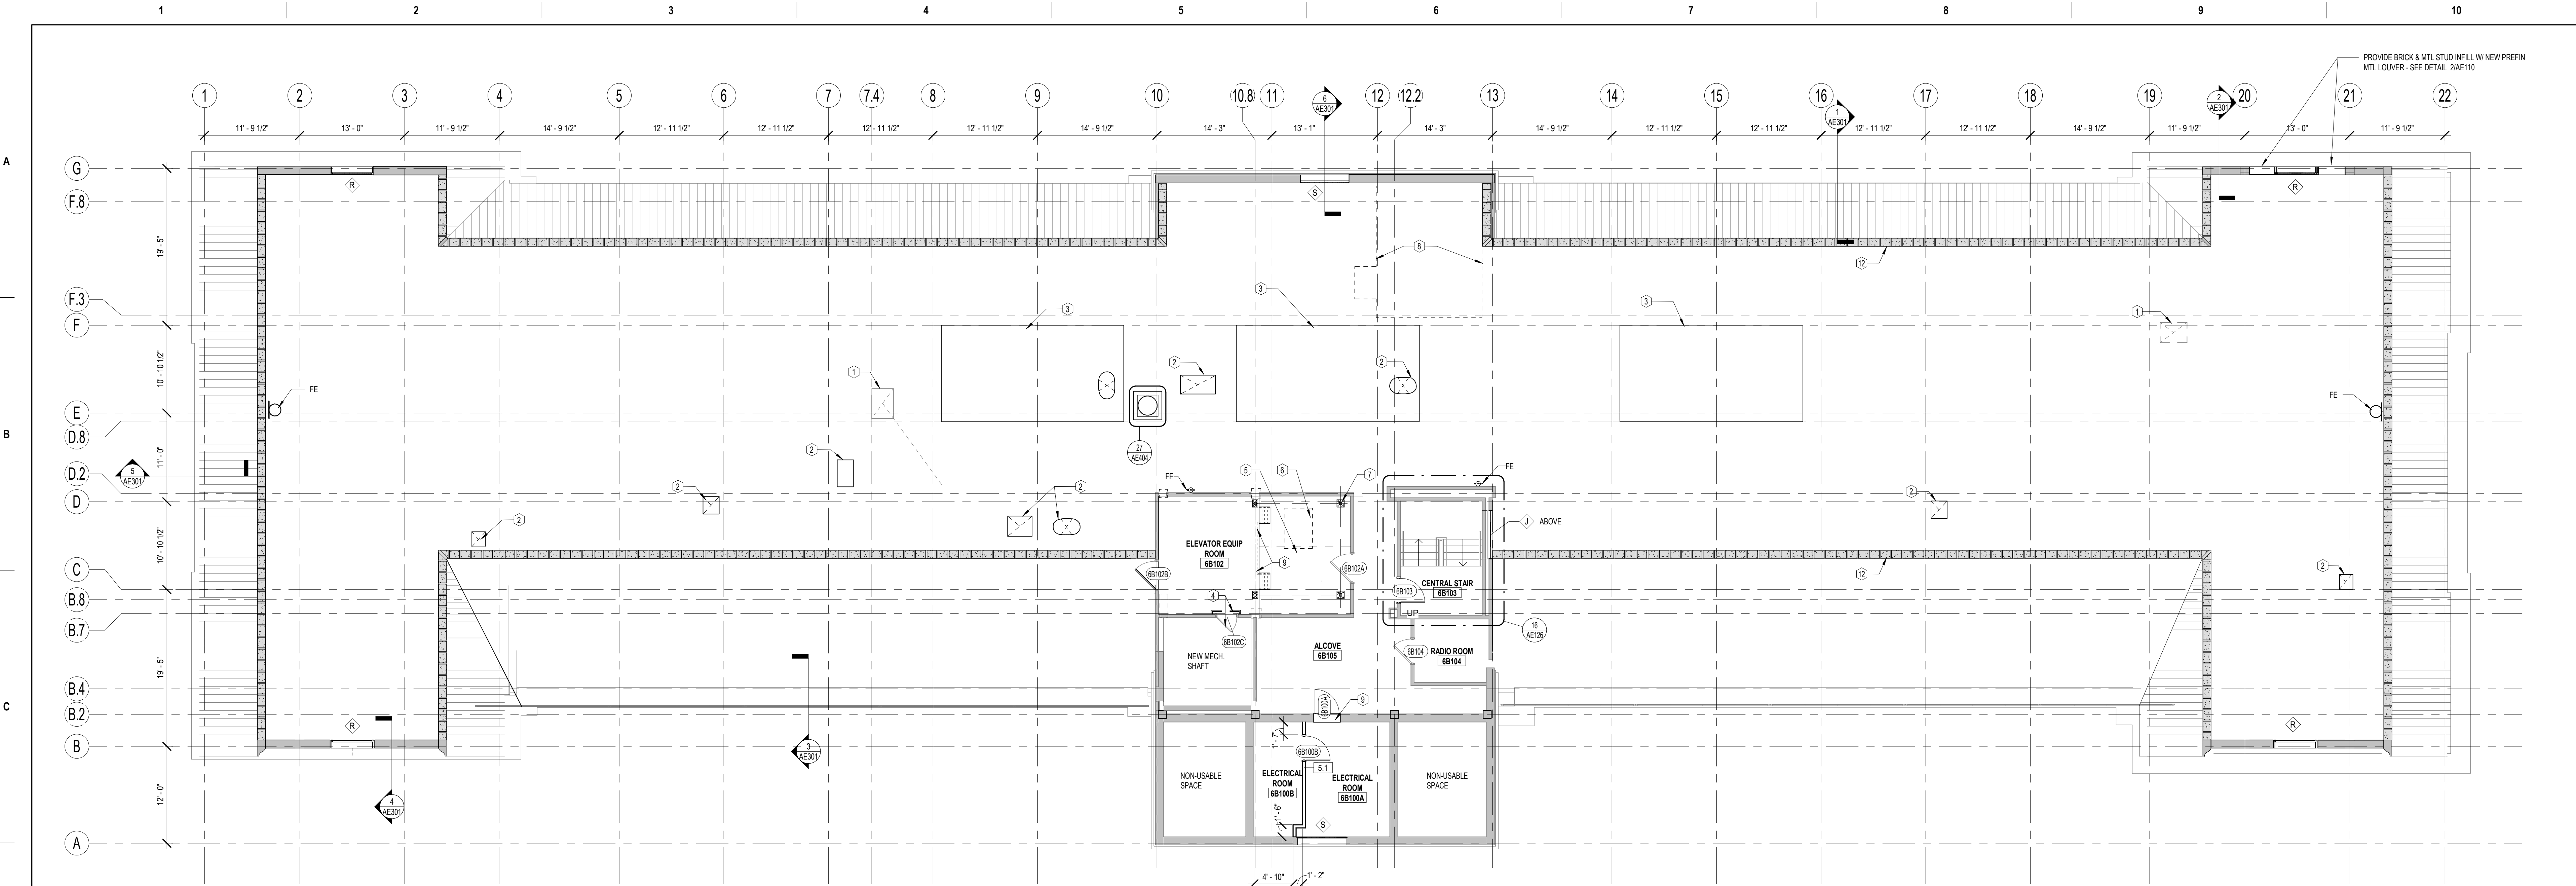

1 ATTIC FLOOR PLAN
AE110/ 1/8" = 1'-0"

ATTIC SPACE TYPES		
		Reno
1 - Support/Infrastructure		730
Floor Total (GSF)		730
Total Variance in Space		0

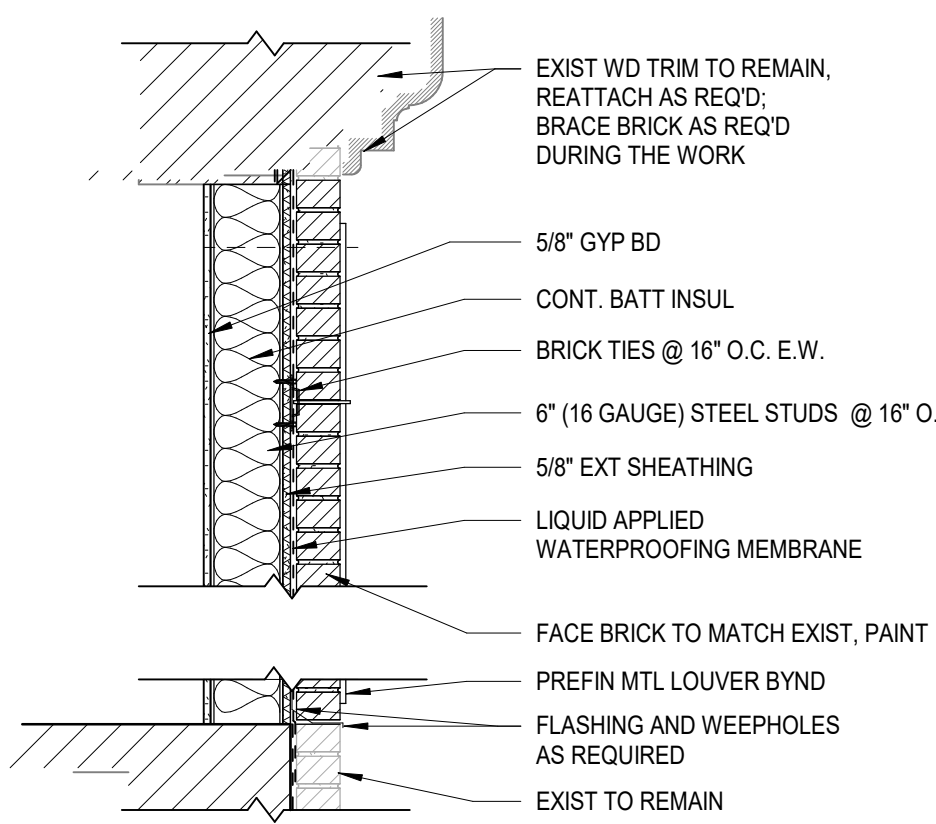

2 BRICK INFILL DETAIL
AE110/ 3/4" = 1'-0"

3 ACCESS HATCH DETAIL
AE110/ 1 1/2" = 1'-0"

KEYED NOTES THIS SHEET

- EXISTING MECHANICAL OPENING. REF. MECH DWGS.
- MECHANICAL OPENING. REF. STRUCTURAL AND MECH DWGS.
- PAINTED STEEL MECHANICAL SUPPORT. SEE STRUCTURAL.
- INSTALL NEW LOCK ON EXISTING DOOR AS THIS DOOR WILL NOT BE ABLE TO OPEN DUE TO NEW DUCT WORK INSIDE OF THE SHAFT. INSTALL NEW SAFETY RAILING AT EXISTING DOOR.
- HOIST REFER TO STRUCTURAL S150
- EXISTING ACCESS HATCH
- STEEL STRUCTURE FOR STEEL HOIST BEAM. REFER TO S130 AND S150
- EXISTING DENTAL EQUIPMENT AND CONCRETE PAD
- MODIFY EXISTING STEEL PIPE GUARDRAIL/HANDRAIL AS REQUIRED FOR INSTALLATION OF STEEL HOIST FRAME
- PROVIDE BRICK & MTL STUD INFILL. SEE DETAIL 2/AE110
- ALUMINUM THRESHOLD FULL WIDTH
- EXISTING KNEE WALL CONSTRUCTION BETWEEN ATTIC SPACE AND ROOF AREA

FLOOR PLAN GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT AND RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDINGS AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- ALL INTERIOR DIMENSIONS ARE TAKEN FROM FACE OF GYPSUM BOARD, BACKER BOARD, CMU, CAST IN PLACE CONCRETE COLUMNS OR FINISHED FACE OF EXISTING WALLS UNLESS OTHERWISE NOTED.
- GYPSUM BOARD CONTROL JOINTS (GCJ) 30'-0" O.C. MAX. UNLESS NOTED OTHERWISE.
- FIRE EXTINGUISHER CABINETS ARE DENOTED ON THE FLOOR PLANS AS FEC; WALL MOUNTED FIRE EXTINGUISHERS ARE DENOTED ON THE PLANS AS (FE). SEE SHEET G102-G105 FOR FIRE EXTINGUISHER LOCATIONS AND AE601 FOR FIRE CABINET DETAILS.
- LAYOUT OF RATED PARTITIONS IS SHOWN ON THE LIFE SAFETY PLAN SHEET G102-G104.
- SEE SHEET AE601 (PARTITION TYPES) FOR PARTITION COMPONENTS AND WALL THICKNESS.
- ALL DOOR FRAMES ARE 2" OFF OF ADJACENT WALL UNLESS NOTED OTHERWISE.
- AT ALL EXISTING SLAB PENETRATIONS THAT ARE NOT BEING REUSED, INFILL HOLES ACCORDING TO STRUCTURAL DETAILS AND REQUIREMENTS.
- SEE G102, AE121, AE122 AND AE123 FOR SHOWER RECEPTOR TYPES

FLOOR PLAN LEGEND

- EXISTING TO REMAIN
- CONSTRUCTION
- FIRE EXTINGUISHER CABINET

GRAPHIC LEGEND

ROOM NAME	ROOM DESIGNATION
101	199 SF
XXX-X	WALL PARTITION TYPE
101	DOOR OPENING
11	CURTAINWALL/ WINDOW TYPE
6.2	COLUMN GRID LINE
1	DETAIL
1	EXTERIOR/ INTERIOR ELEVATION
1	BUILDING/ DETAIL SECTION
1	FLOOR DRAIN
N	KEYNOTE
A0001	EQUIPMENT TAG
℄	CENTER LINE
⬆	NORTH ARROW

0 4' 8' 16'

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESAC, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP



Office of
Construction
and Facilities
Management



U.S. Department
of Veterans
Affairs

Drawing Title

ATTIC FLOOR PLAN - BUILDOUT

Approved:

Phase

CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

Project Title

RENOVATE BUILDING 1

Location

BILOXI, MISSISSIPPI

Issue Date

03/10/2023

Checked

LA

Drawn

CD,PC

Project Number

520-317X


Building Number

1



Drawing Number

AE110


Dwg. 73 of 238

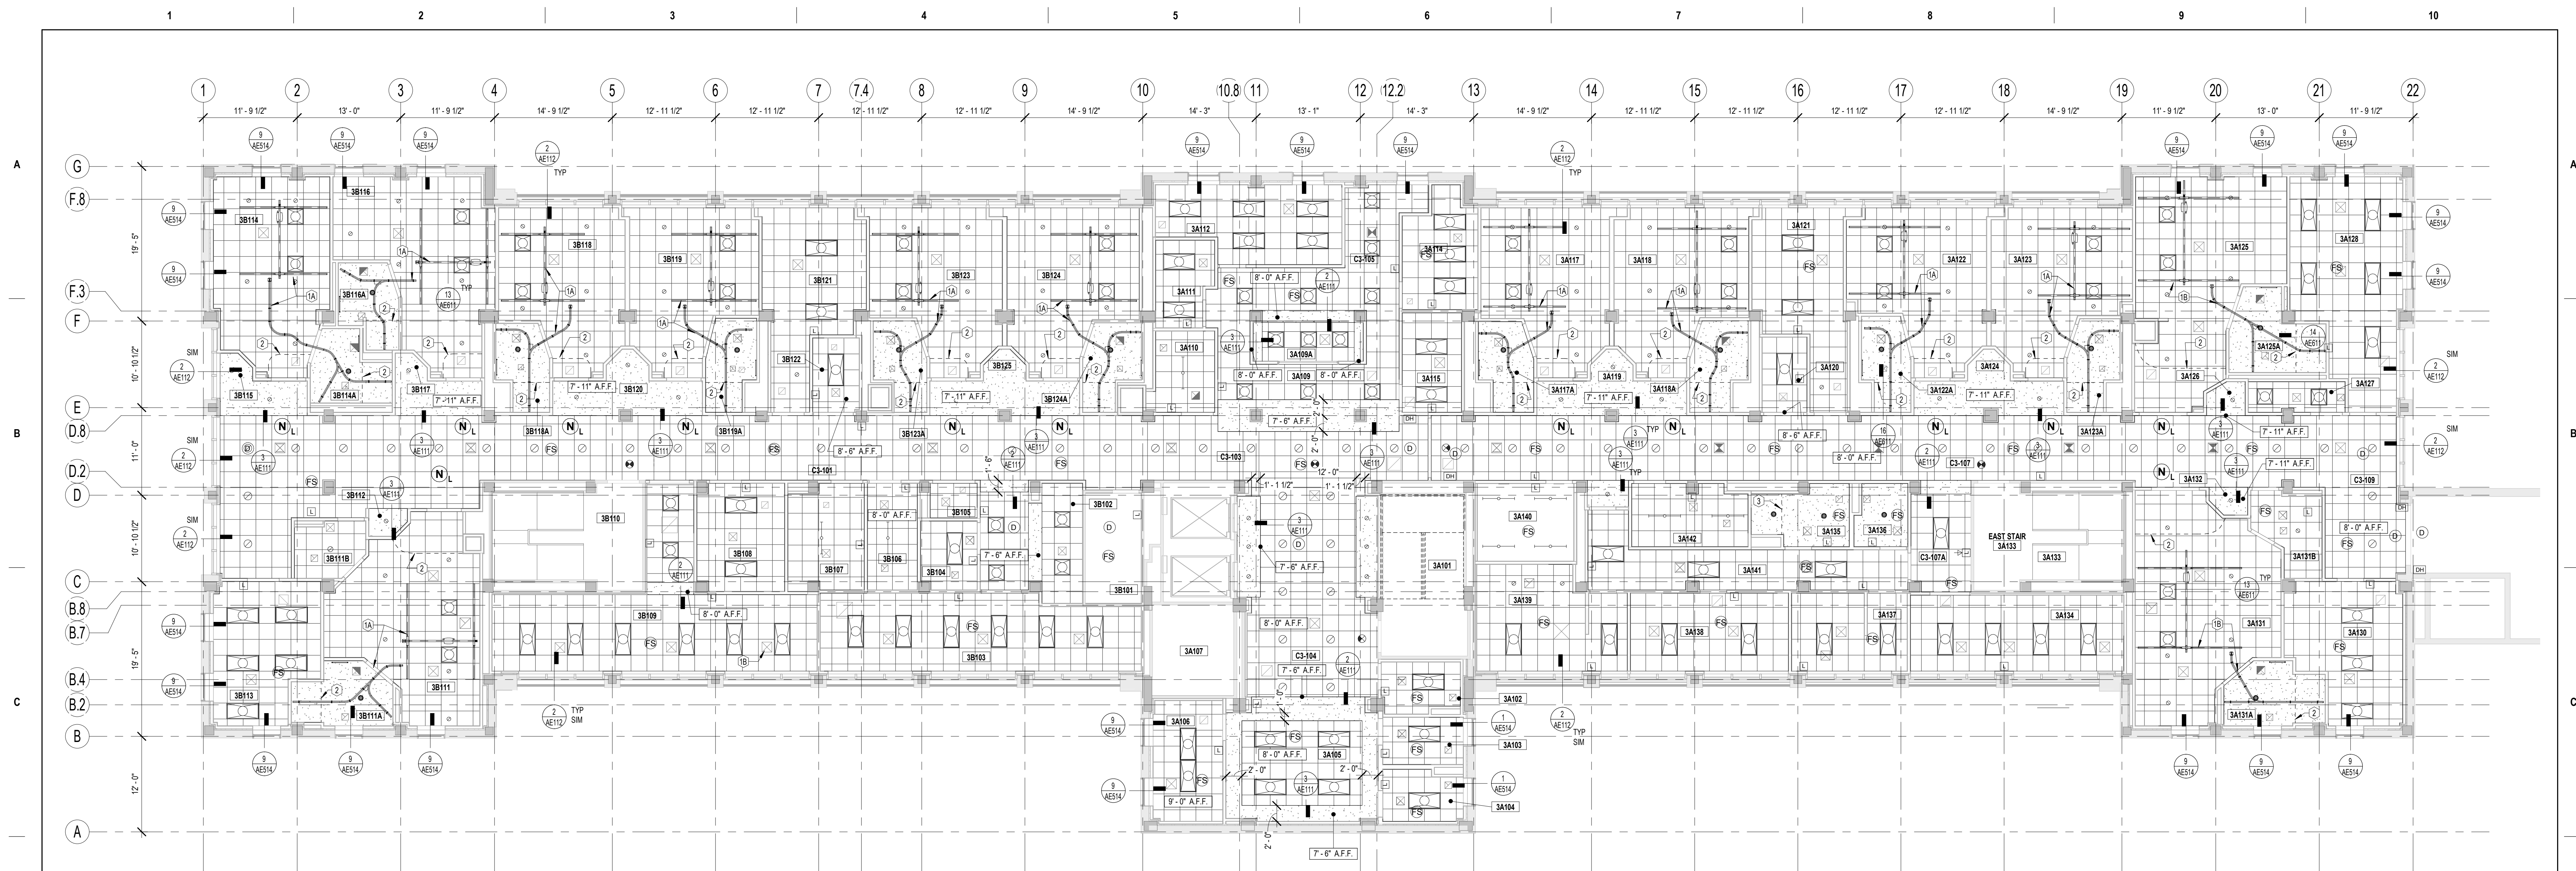

1 3RD FLOOR REFLECTED CEILING PLAN
AE111 1/8" = 1'-0"





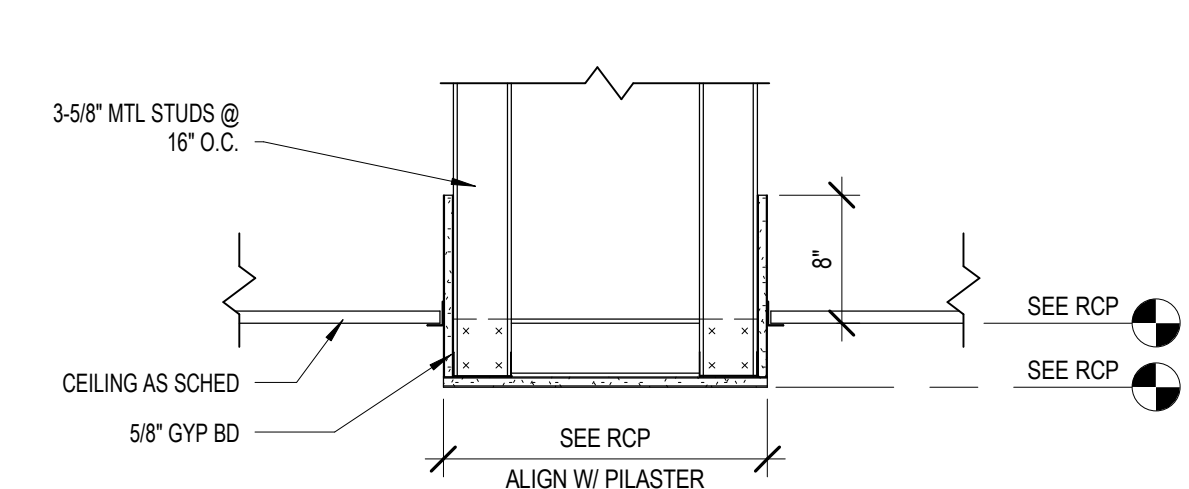
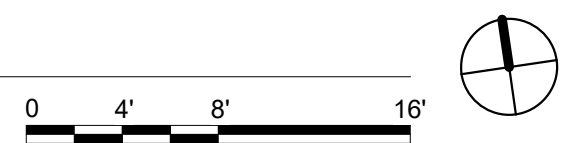


2 TYPICAL CORRIDOR FURDOWN
AE111 1" = 1'-0"

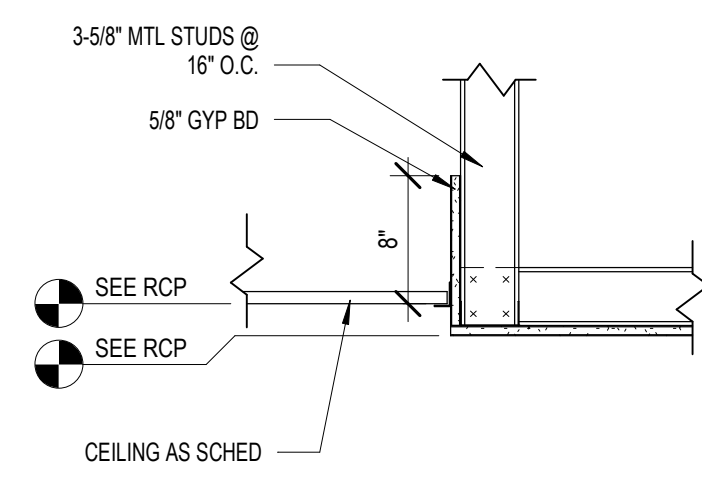

3 TYPICAL CEILING TRANSITION
AE111 1" = 1'-0"

RCP LEGEND

	2X2 LAY IN TILE			TROFFER LIGHT FIXTURE. SEE ELEC.
	GYP BOARD			DOWNLIGHT RECESSED LIGHT FIXTURE. SEE ELEC.
	EXP STRUCT			DOWNLIGHT STRIP LIGHT FIXTURE. SEE ELEC.
	CEILING HEIGHT			CEILING MOUNTED SPEAKER
				MECH DIFFUSERS/GRILLES- SEE MECH.
	LIFT TRACK			FIRE ALARM CEILING MOUNTED SPEAKER. SEE ELEC.
	LIGHT FIXTURE SURFACE MOUNT, SEE ELEC.			SMOKE DETECTOR
	STRIP LIGHT FIXTURE, SEE ELEC.			PRIVACY CURTAIN OR SHOWER CURTAIN
	CORRIDOR LIGHT VISUAL INDICATOR FOR NURSE CALL. SEE TELECOM			WALL MOUNTED FIRE ALARM DEVICES - DOOR HOLD OPEN
	WALL MOUNTED FIRE ALARM DEVICES - STROBE. SEE ELEC.			WALL MOUNTED FIRE ALARM DEVICES - SPEAKER STROBE. SEE ELEC.

RCP GENERAL NOTES

1. CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
2. UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY ARCHITECT AND THE RESIDENT ENGINEER IN WRITING. OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA. SEE DETAIL 16A6611
3. WHERE LAY-IN CEILING UNITS LESS THAN 6 INCHES WIDE OCCUR AT EDGES OF ROOM WITH 24X24 INCH PATTERN PROVIDE 24X48 INCH PANELS CUT TO EXTEND TO WALL ELIMINATING THE TEE NEAR THE WALL.
4. THE PROPER LAYOUT OF THE RCP IS A COMBINATION OF ELECTRICAL & MECHANICAL PLANS AND THE CEILING FINISH CHOICE. COORDINATION IS REQUIRED PRIOR TO INSTALLATION OF THE CEILING LIGHT FIXTURES, DIFFUSERS, ETC. COORDINATION/RESOLUTION TO CEILING CONFLICTS ARE TO BE APPROVED BY RESIDENT ENGINEER.
5. SEE MECHANICAL AND ELECTRICAL SHEETS TO VERIFY SIZE, TYPE, NUMBER AND LOCATIONS OF FIXTURES.
6. ALL LIGHTS TO BE CENTERED WITHIN 2X2 GRID (TYPICAL). ALL 2X2 GRIDS TO BE CENTERED WITHIN ROOM (TYPICAL).
7. PROVIDE PAINTABLE ACCESS PANELS IN GYP BO CEILINGS AS REQ'D FOR ACCESS TO MECH & PLUMBING EQUIP. SEE MECH & PLUMBING FOR LOCATIONS.
8. ALL SUSPENDED ACQ AND GYPSUM BOARD CEILINGS HEIGHTS ARE AT 9'-0" AFF U.O. ALL GYPSUM BOARD SOFFITS ARE AT 7'-1" AFF U.O.

RCP KEY NOTES

- | | |
|----|--|
| 1A | PATIENT LIFT TRACK, 550# RE: SPECIALTY EQUIPMENT DRAWINGS (LIFTS), SEE DETAIL 13/AE#11, 14/AE#11, AND 16/AE#11 |
| 1B | PATIENT LIFT TRACK, 770# RE: SPECIALTY EQUIPMENT DRAWINGS (LIFTS), SEE DETAIL 13/AE#11, 14/AE#11, AND 16/AE#11 |
| 2 | PRIVACY CURTAIN & TRACK |
| 3 | SHOWER CURTAIN & ROD |
| 4 | PROVIDE STEEL SUPPORT ABOVE SUSPENDED CEILING FOR CEILING MOUNTED TOILET PARTITION SEE DETAIL 15/AE#11 |
| 5 | CEILING TRACK FOR DENTAL LIGHT |
| 6 | PROVIDE REINFORCED LENGTHS OF CEILING TRACKS AS REQUIRED TO ALLOW FOR REMOVAL OF 6' X 6' AREA OF ACT FOR ACCESS/USE OF THE ATTIC HATCH. SEE 11/AE#10 |

[illegible]


CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESAK, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP

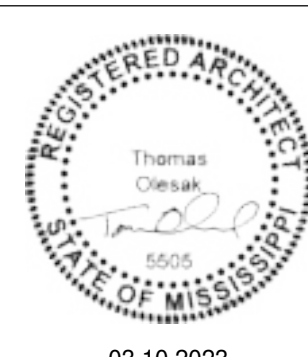

Office of
Construction
and Facilities
Management

VA

U.S. Department
of Veterans
Affairs

Drawing Title
3RD FLOOR REFLECTED CEILING
PLAN

Approved:

Phase	CONSTRUCTION DOCUMENTS
-------	------------------------

FULLY SPRINKLERED

Project Title	RENOVATE BUILDING 1
---------------	---------------------

Location	BILOXI, MISSISSIPPI
----------	---------------------

Issue Date	03/10/2023
------------	------------

Checked	
LA	

Drawn	CD,PC
-------	-------


Project Number	520-317X
----------------	----------

Building Number	1
-----------------	---


Drawing Number
AF111

Dwg. 74 of 238


BID DOCUMENTS

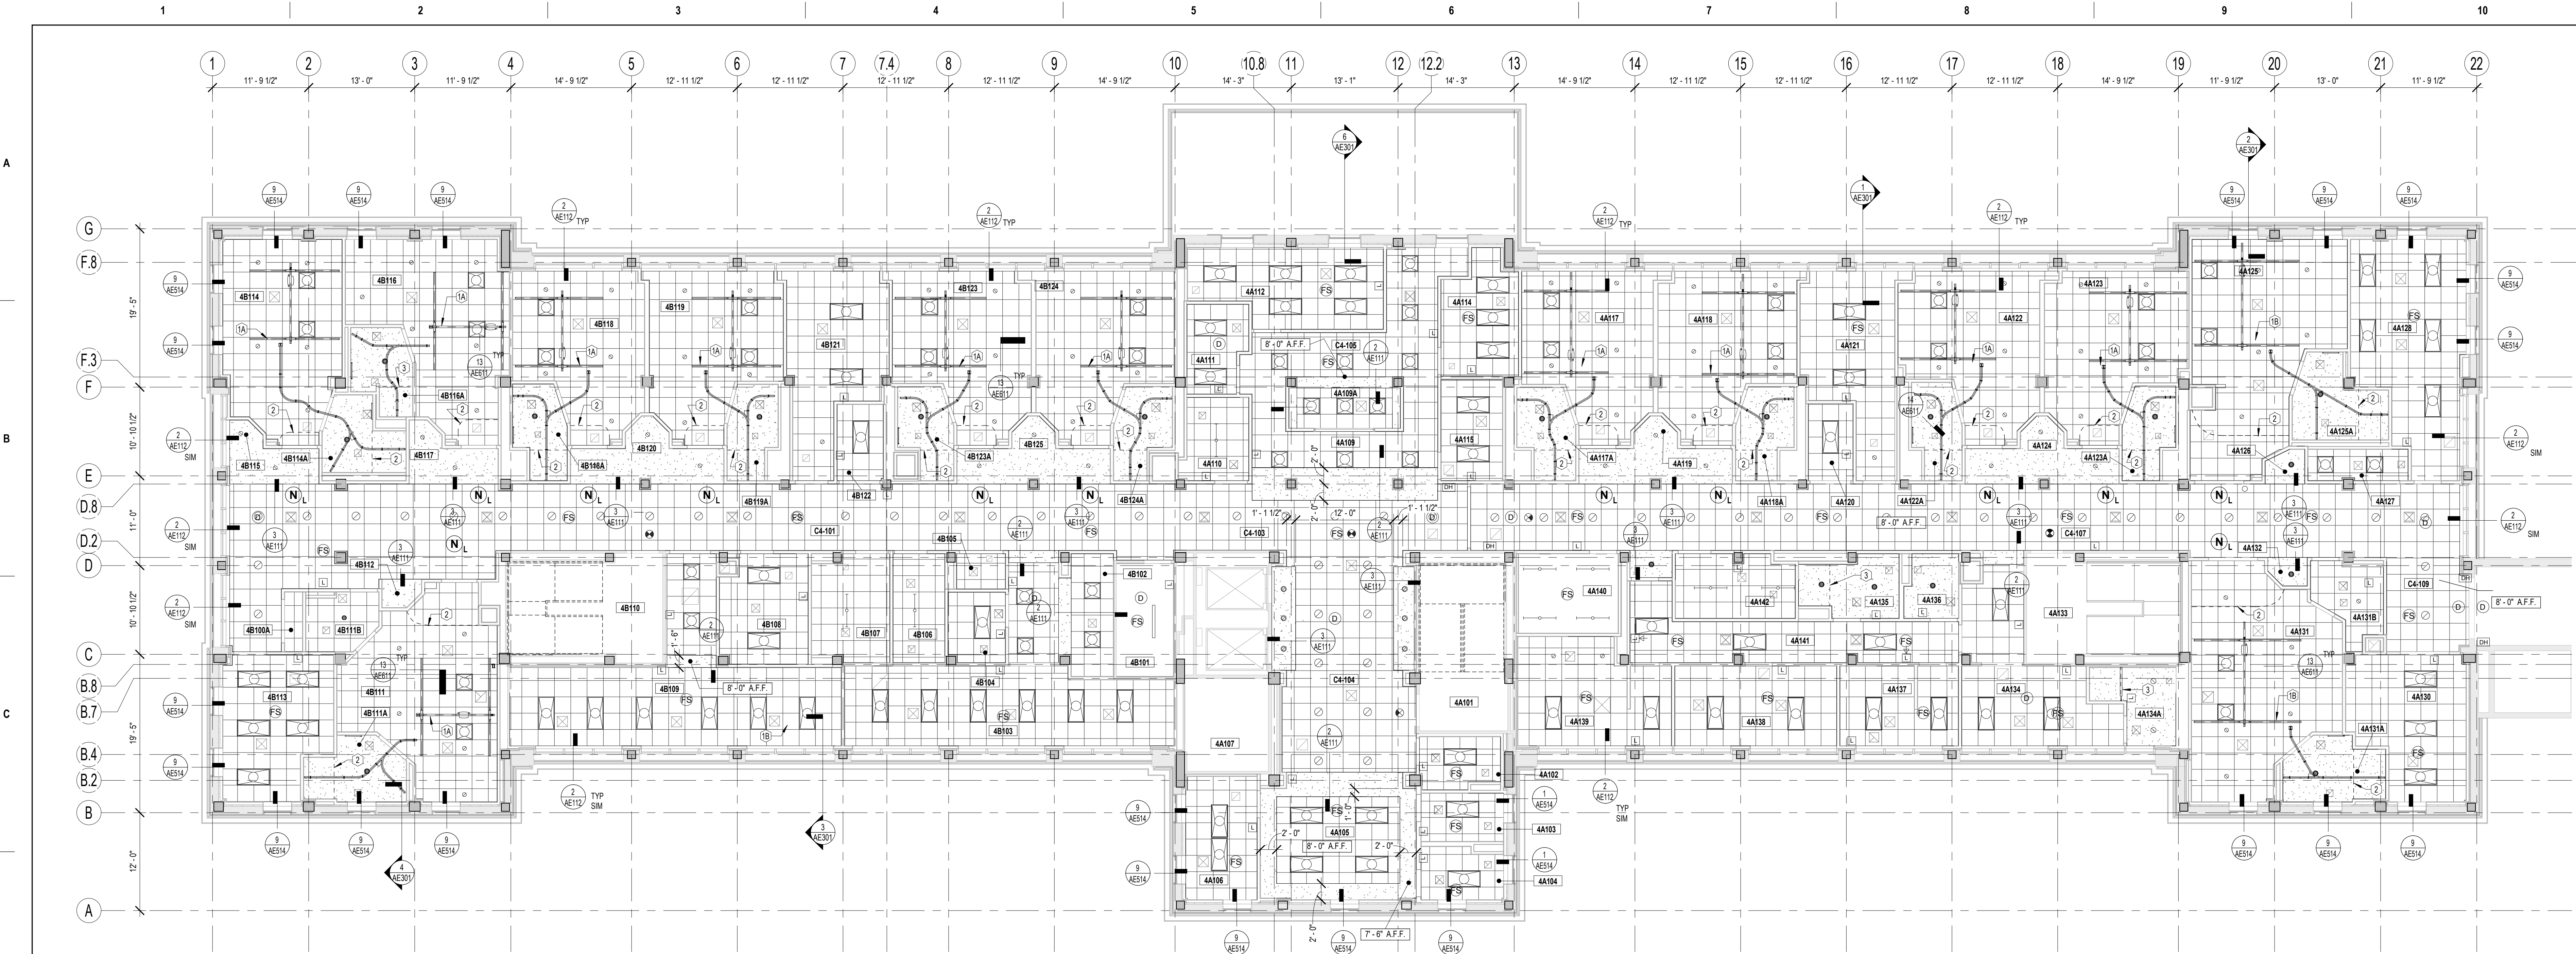

1 4TH FLOOR REFLECTED CEILING PLAN
AE112 1/8" = 1'-0"

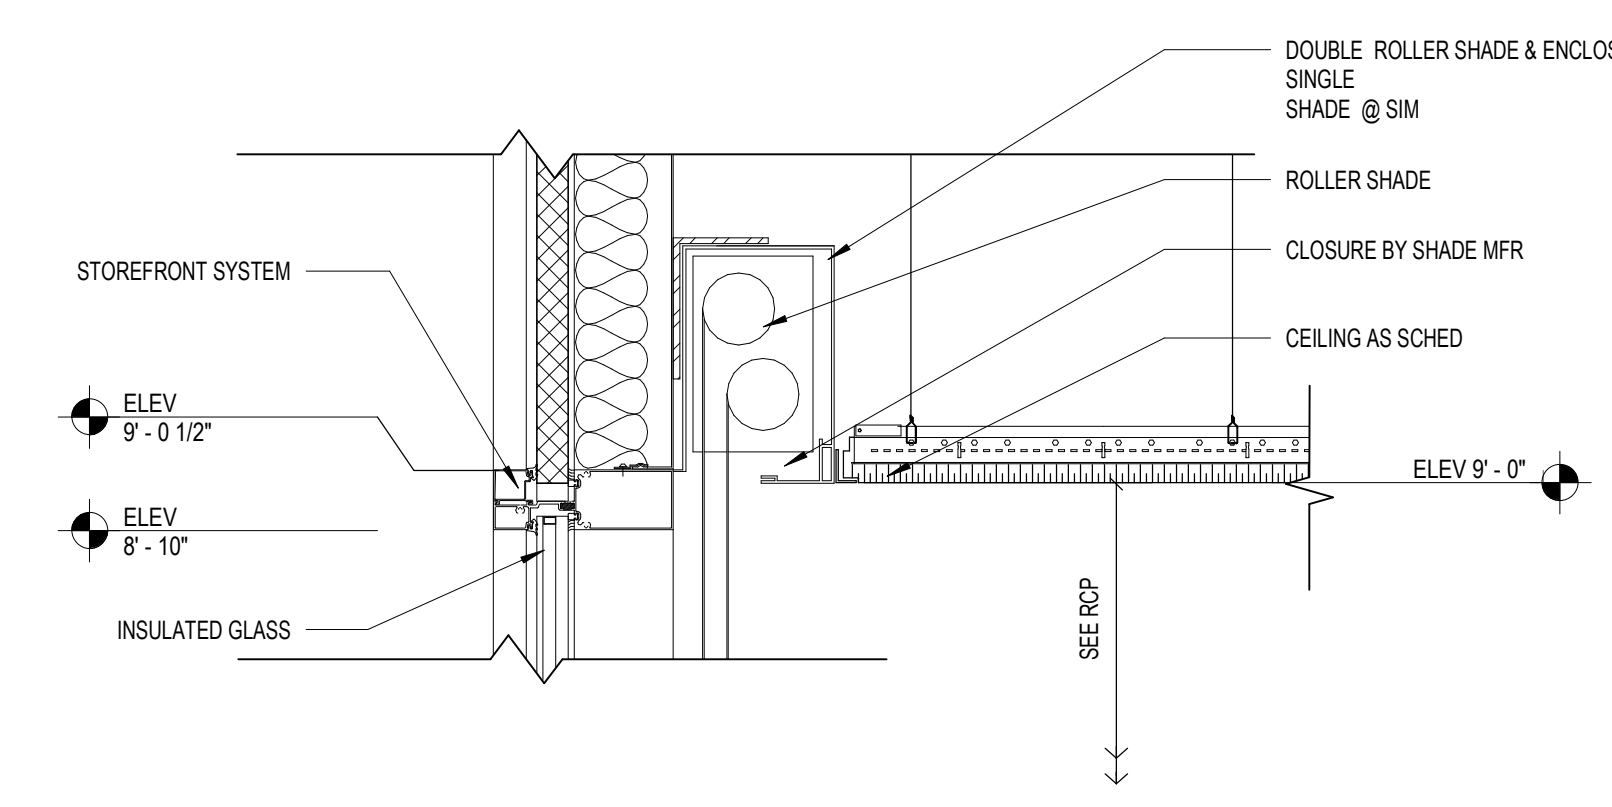

2 ACT CONNECTION AT DOUBLE ROLLER SHADE
AE112 1 1/2" = 1'-0"

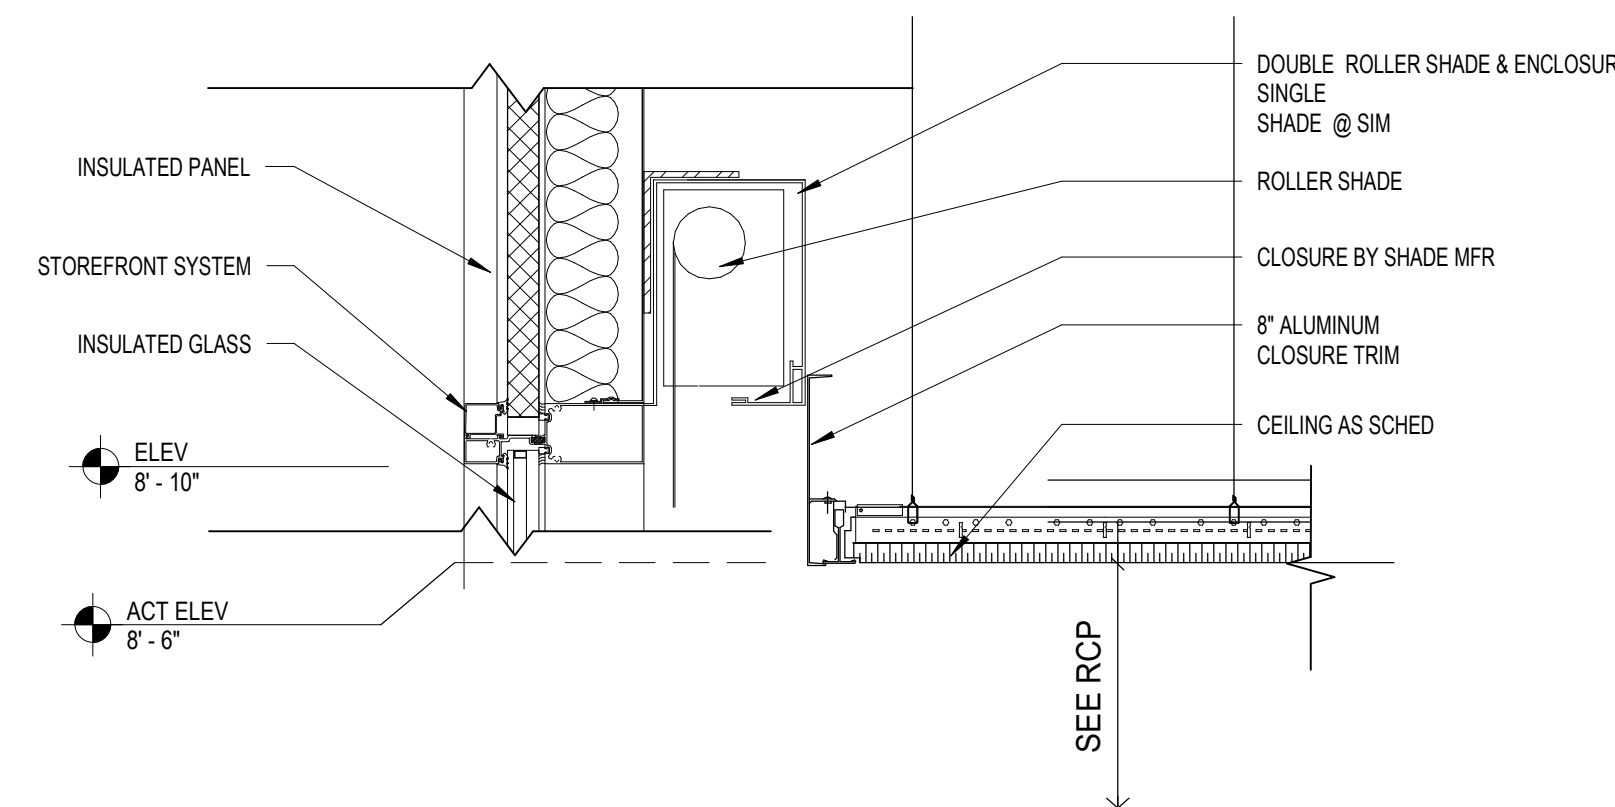

3 ACT CONNECTION AT SINGLE ROLLER SHADE
AE112 1 1/2" = 1'-0"

RCP LEGEND

	2X2 LAY IN TILE		TROFFER LIGHT FIXTURE, SEE ELEC.
	GYP BOARD		DOWNLIGHT RECESSED LIGHT FIXTURE, SEE ELEC.
	EXP STRUCT		DOWNLIGHT STRIP LIGHT FIXTURE, SEE ELEC.
	8'-0" A.F.F. CEILING HEIGHT		CEILING MOUNTED SPEAKER
	EXIT LIGHT, SEE ELEC.		MECH DIFFUSERS/GRILLES-SEE MECH.
	LIFT TRACK		FIRE ALARM CEILING MOUNTED SPEAKER, SEE ELEC.
	LIGHT FIXTURE SURFACE MOUNT, SEE ELEC.		SMOKE DETECTOR
	STRIP LIGHT FIXTURE, SEE ELEC.		PRIVACY CURTAIN OR SHOWER CURTAIN
	CORRIDOR LIGHT VISUAL INDICATOR FOR NURSE CALL, SEE TELECOM		WALL MOUNTED FIRE ALARM DEVICES - DOOR HOLD OPEN
	WALL MOUNTED FIRE ALARM DEVICES - STROBE, SEE ELEC.		WALL MOUNTED FIRE ALARM DEVICES - SPEAKER STROBE, SEE ELEC.

RCP GENERAL NOTES


- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY ARCHITECT AND THE RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA. SEE DETAIL 16/AE611
- WHERE LAY-IN CEILING UNITS LESS THAN 6 INCHES WIDE OCCUR AT EDGES OF ROOM WITH 24X24 INCH PATTERN PROVIDE 24X48 INCH PANELS CUT TO EXTEND TO WALL ELIMINATING THE TEE NEAR THE WALL.
- THE PROPER LAYOUT OF THE RCP IS A COMBINATION OF ELECTRICAL & MECHANICAL PLANS AND THE CEILING FINISH CHOSEN. COORDINATION IS REQUIRED PRIOR TO INSTALLATION OF THE CEILING. LIGHT FIXTURES, DIFFUSERS, ETC. COORDINATION/RESOLUTION TO CEILING CONFLICTS ARE TO BE APPROVED BY RESIDENT ENGINEER.
- SEE MECHANICAL AND ELECTRICAL SHEETS TO VERIFY SIZE, TYPE, NUMBER AND LOCATIONS OF FIXTURES.
- ALL LIGHTS TO BE CENTERED WITHIN 2X2 GRID (TYPICAL); ALL 2X2 GRIDS TO BE CENTERED WITHIN ROOM (TYPICAL).
- PROVIDE PAINTABLE ACCESS PANELS IN GYP BD CEILINGS AS REQ'D FOR ACCESS TO MECH & PLUMBING EQUIP. SEE MECH & PLUMBING FOR LOCATIONS.
- ALL SUSPENDED ACP AND GYPSUM BOARD CEILINGS HEIGHTS ARE AT 9'-0" AFF U.N.O. ALL GYPSUM BOARD SOFFITS ARE AT 7'-11" AFF U.N.O.

RCP KEY NOTES


- PATIENT LIFT TRACK, 550# RE: SPECIALTY EQUIPMENT DRAWINGS (LIFTS), SEE DETAIL 13/AE611, 14/AE611, AND 16/AE611
- PATIENT LIFT TRACK, 770# RE: SPECIALTY EQUIPMENT DRAWINGS (LIFTS), SEE DETAIL 13/AE611, 14/AE611, AND 16/AE611
- PRIVACY CURTAIN & TRACK
- SHOWER CURTAIN & ROD
- PROVIDE STEEL SUPPORT ABOVE SUSPENDED CEILING FOR CEILING MOUNTED TOILET PARTITIONS, SEE DETAIL 15/AE611
- CEILING TRACK FOR DENTAL LIGHT
- PROVIDE REINFORCED LENGTHS OF CEILING TRACKS AS REQUIRED TO ALLOW FOR REMOVAL OF 6' X 6' AREA OF ACT FOR ACCESS/USE OF THE ATTIC HATCH. SEE 1/AE110.

BID DOCUMENTS


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

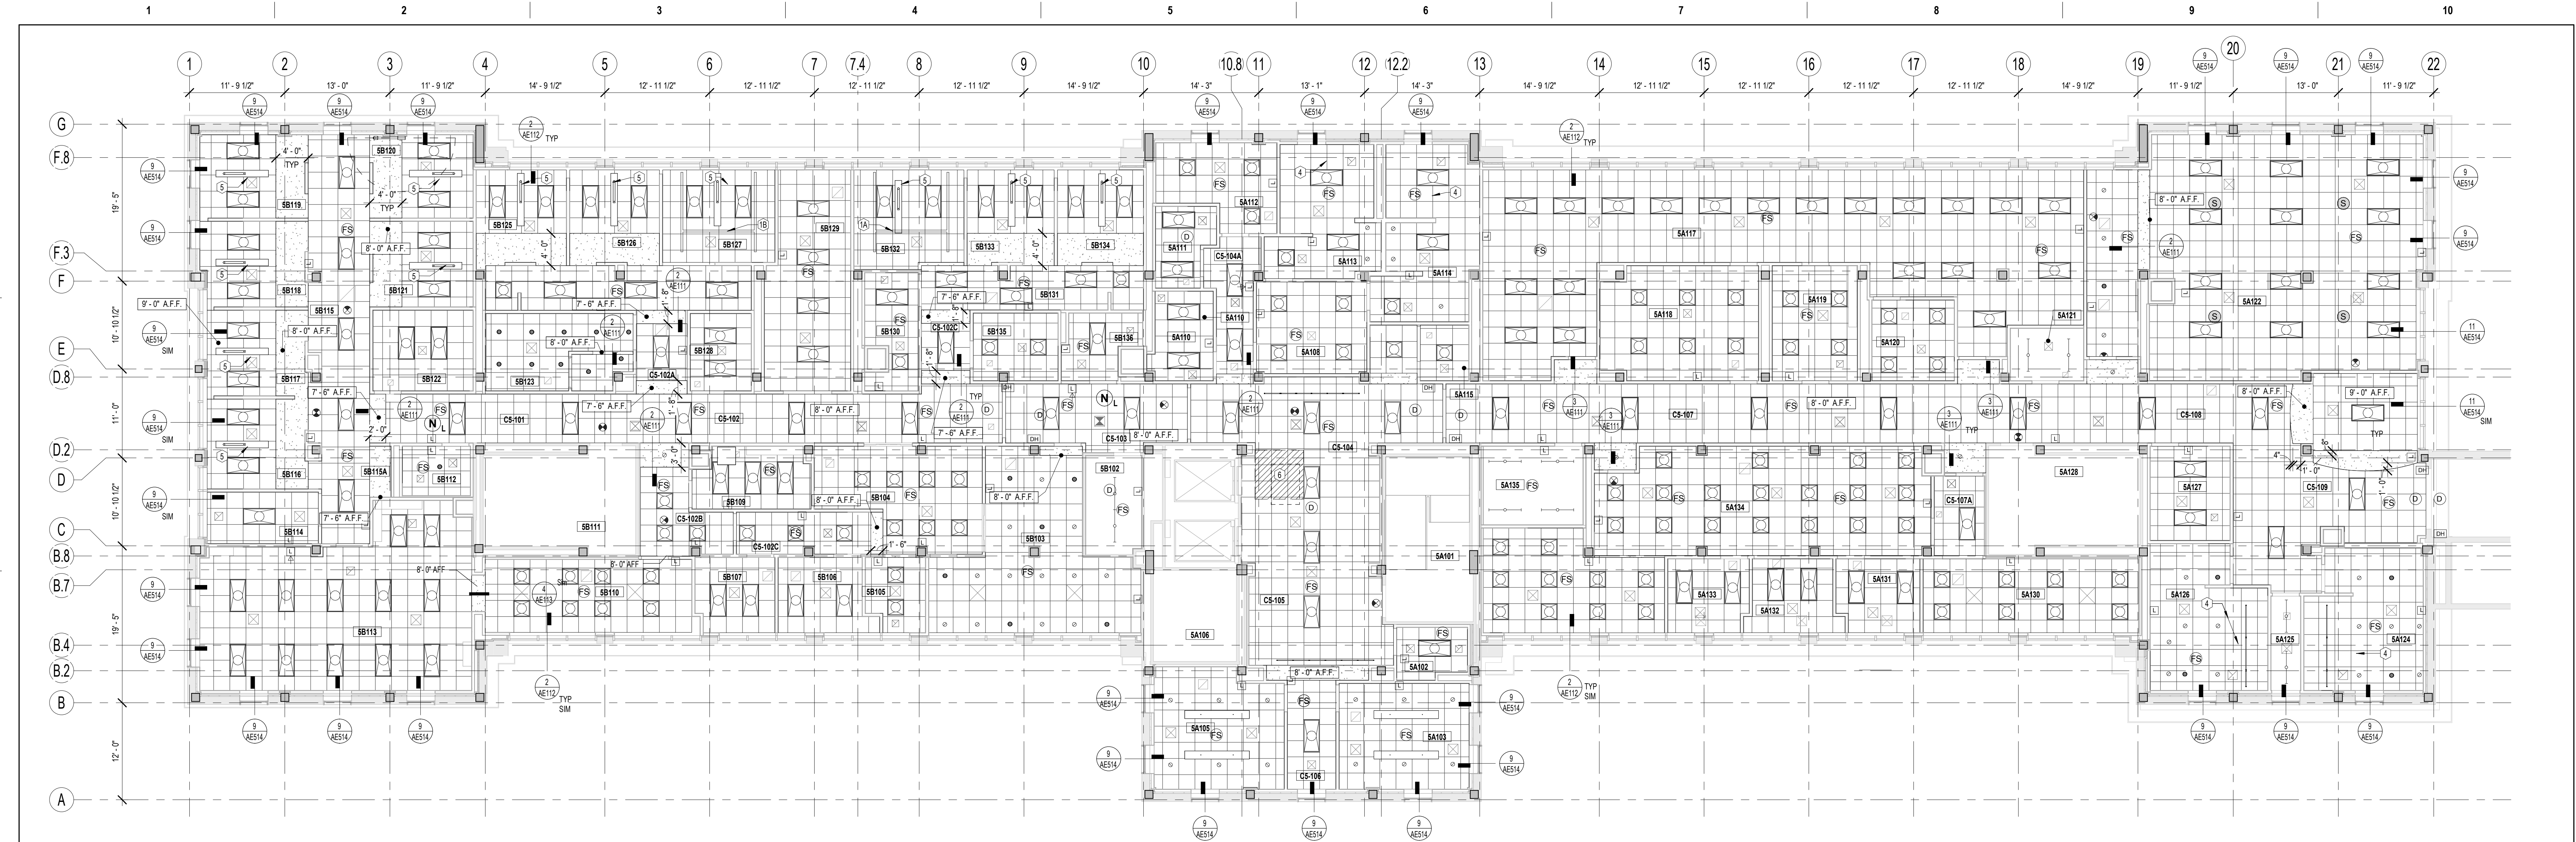


1 5TH FLOOR REFLECTED CEILING PLAN
AE113 1/8" = 1'-0"

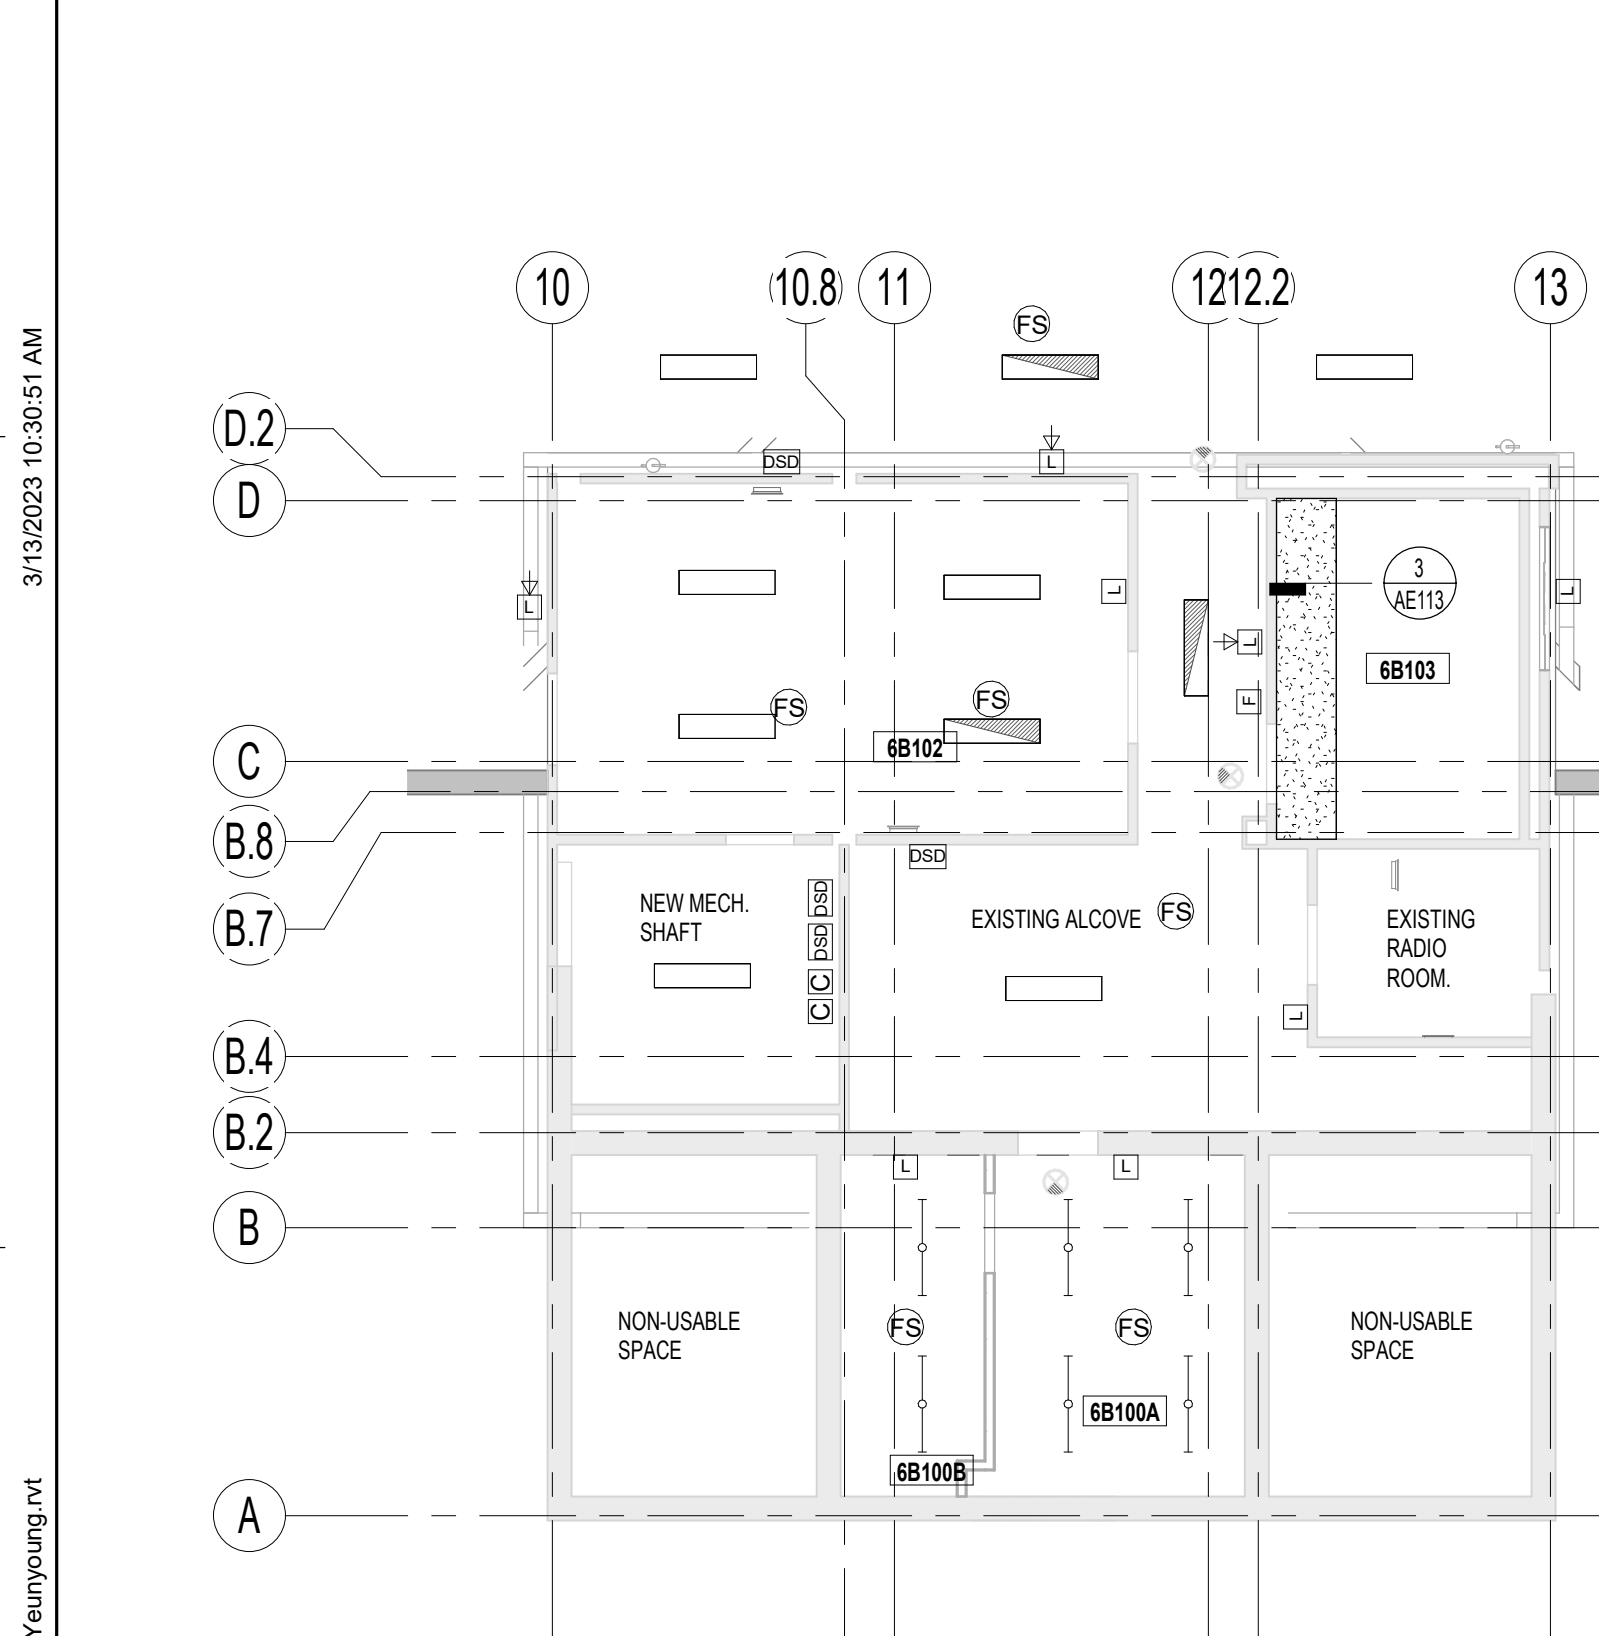

2 ATTIC REFLECTED CEILING PLAN
AE113 1/8" = 1'-0"

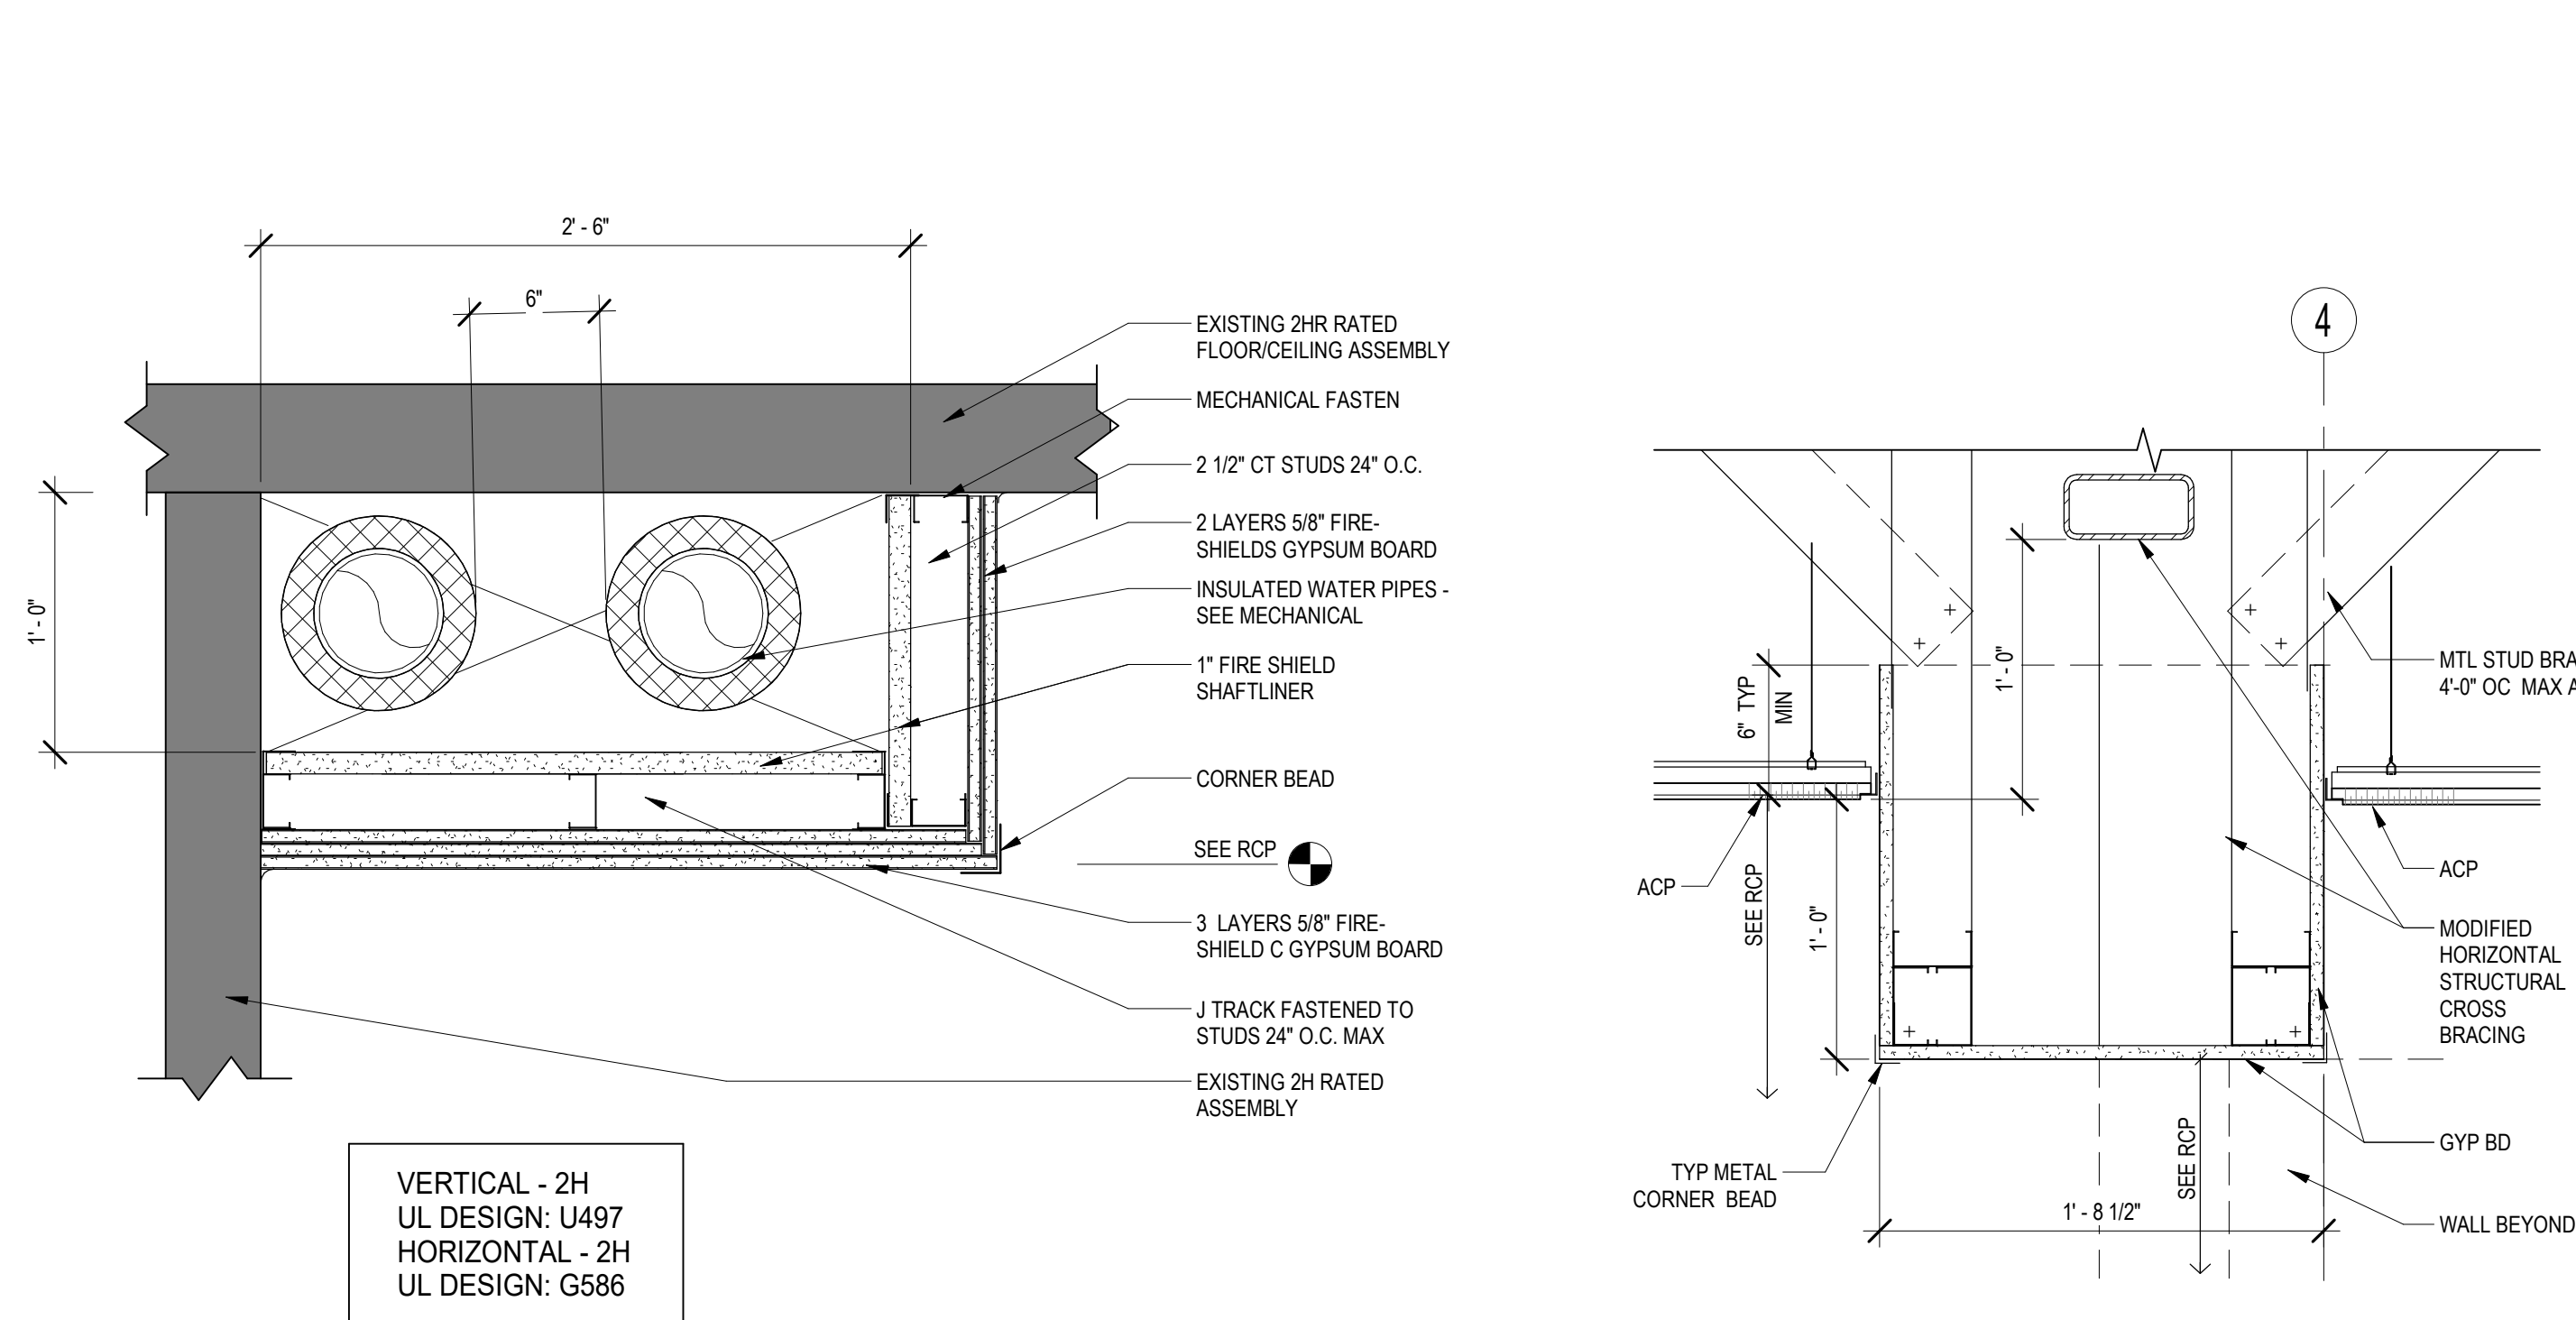

3 2 HR RATED ENCLOSURE
AE113 1 1/2\"/>

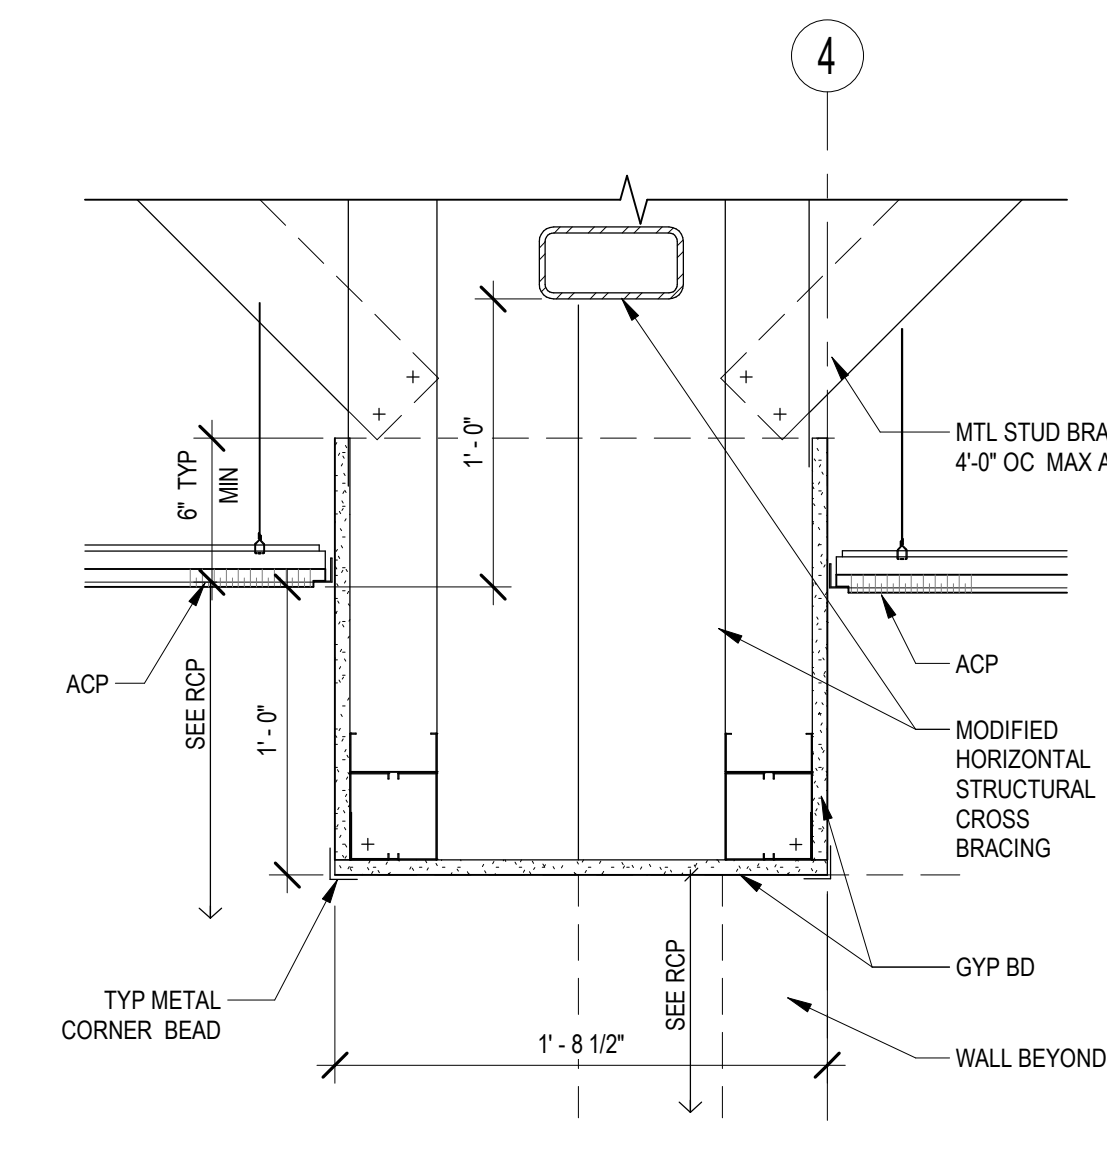

4 BULKHEAD DETAIL
AE113 1 1/2\"/>

RCP LEGEND

	2X2 LAY IN TILE		TROFFER LIGHT FIXTURE, SEE ELEC.
	GYP BOARD		DOWNLIGHT RECESSED LIGHT FIXTURE, SEE ELEC.
	EXP STRUCT		DOWNLIGHT STRIP LIGHT FIXTURE, SEE ELEC.
	8'-0" A.F.F. CEILING HEIGHT		CEILING MOUNTED SPEAKER
	EXIT LIGHT, SEE ELEC.		MECH DIFFUSERS/GRILLES, SEE MECH.
	LIFT TRACK		FIRE ALARM CEILING MOUNTED SPEAKER, SEE ELEC.
	LIGHT FIXTURE SURFACE MOUNT, SEE ELEC.		SMOKE DETECTOR
	STRIP LIGHT FIXTURE, SEE ELEC.		PRIVACY CURTAIN OR SHOWER CURTAIN
	CORRIDOR LIGHT VISUAL INDICATOR FOR NURSE CALL, SEE TELECOM		WALL MOUNTED FIRE ALARM DEVICES - DOOR HOLD OPEN
	WALL MOUNTED FIRE ALARM DEVICES - STROBE, SEE ELEC.		WALL MOUNTED FIRE ALARM DEVICES - SPEAKER STROBE, SEE ELEC.

RCP GENERAL NOTES


- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS.
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS AND EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY ARCHITECT AND THE RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THAT AREA. SEE DETAIL, 16AE611.
- WHERE LAY-IN CEILING UNITS LESS THAN 6 INCHES WIDE OCCUR AT EDGES OF ROOM WITH 24X24 INCH PATTERN PROVIDE 24X48 INCH PANELS CUT TO EXTEND TO WALL ELIMINATING THE TEE NEAR THE WALL.
- THE PROPER LAYOUT OF THE RCP IS A COMBINATION OF ELECTRICAL & MECHANICAL PLANS AND THE CEILING FINISH CHOSEN. COORDINATION IS REQUIRED PRIOR TO INSTALLATION OF THE CEILING, LIGHT FIXTURES, DIFFUSERS, ETC. COORDINATION/RESOLUTION TO CEILING CONFLICTS ARE TO BE APPROVED BY RESIDENT ENGINEER.
- SEE MECHANICAL AND ELECTRICAL SHEETS TO VERIFY SIZE, TYPE, NUMBER AND LOCATIONS OF FIXTURES.
- ALL LIGHTS TO BE CENTERED WITHIN 2X2 GRID (TYPICAL); ALL 2X2 GRIDS TO BE CENTERED WITHIN ROOM (TYPICAL).
- PROVIDE PAINTABLE ACCESS PANELS IN GYP BO CEILINGS AS REQD FOR ACCESS TO MECH & PLUMBING EQUIP. SEE MECH & PLUMBING FOR LOCATIONS.
- ALL SUSPENDED ACP AND GYPSUM BOARD CEILING HEIGHTS ARE AT 9'-0" AFF U.N.O. ALL GYPSUM BOARD SOFFITS ARE AT 7'-11" AFF U.N.O.



RCP KEY NOTES

- PATIENT LIFT TRACK, 550# RE: SPECIALTY EQUIPMENT DRAWINGS (LIFTS), SEE DETAIL 13AE611, 14AE611, AND 16AE611
- PATIENT LIFT TRACK, 770# RE: SPECIALTY EQUIPMENT DRAWINGS (LIFTS), SEE DETAIL 13AE611, 14AE611, AND 16AE611
- PRIVACY CURTAIN & TRACK
- SHOWER CURTAIN & ROD
- PROVIDE STEEL SUPPORT ABOVE SUSPENDED CEILING FOR CEILING MOUNTED TOILET PARTITIONS, SEE DETAIL 15AE611
- CEILING TRACK FOR DENTAL LIGHT
- PROVIDE REINFORCED LENGTHS OF CEILING TRACKS AS REQUIRED TO ALLOW FOR REMOVAL OF 6' X 6' AREA OF ACT FOR ACCESS/USE OF THE ATTIC HATCH. SEE 16AE110.

BID DOCUMENTS

NO.	REVISIONS	DATE	CONSULTANT	ARCHITECT/ENGINEER OF RECORD THOMAS OLESAK, ARCHITECT MS Lic # 5505 1050 HOYT AVE WEST ST PAUL, MN 55117 952-451-0460	STAMP 	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title 5TH FLOOR & ATTIC REFLECTED CEILING PLAN Approved:	Phase CONSTRUCTION DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE BUILDING 1	Location BILOXI, MISSISSIPPI	Issue Date 03/10/2023	Checked LA	Drawn CD,PC	Project Number 520-317X Building Number 1 Drawing Number AE113 Dwg. 76 of 238

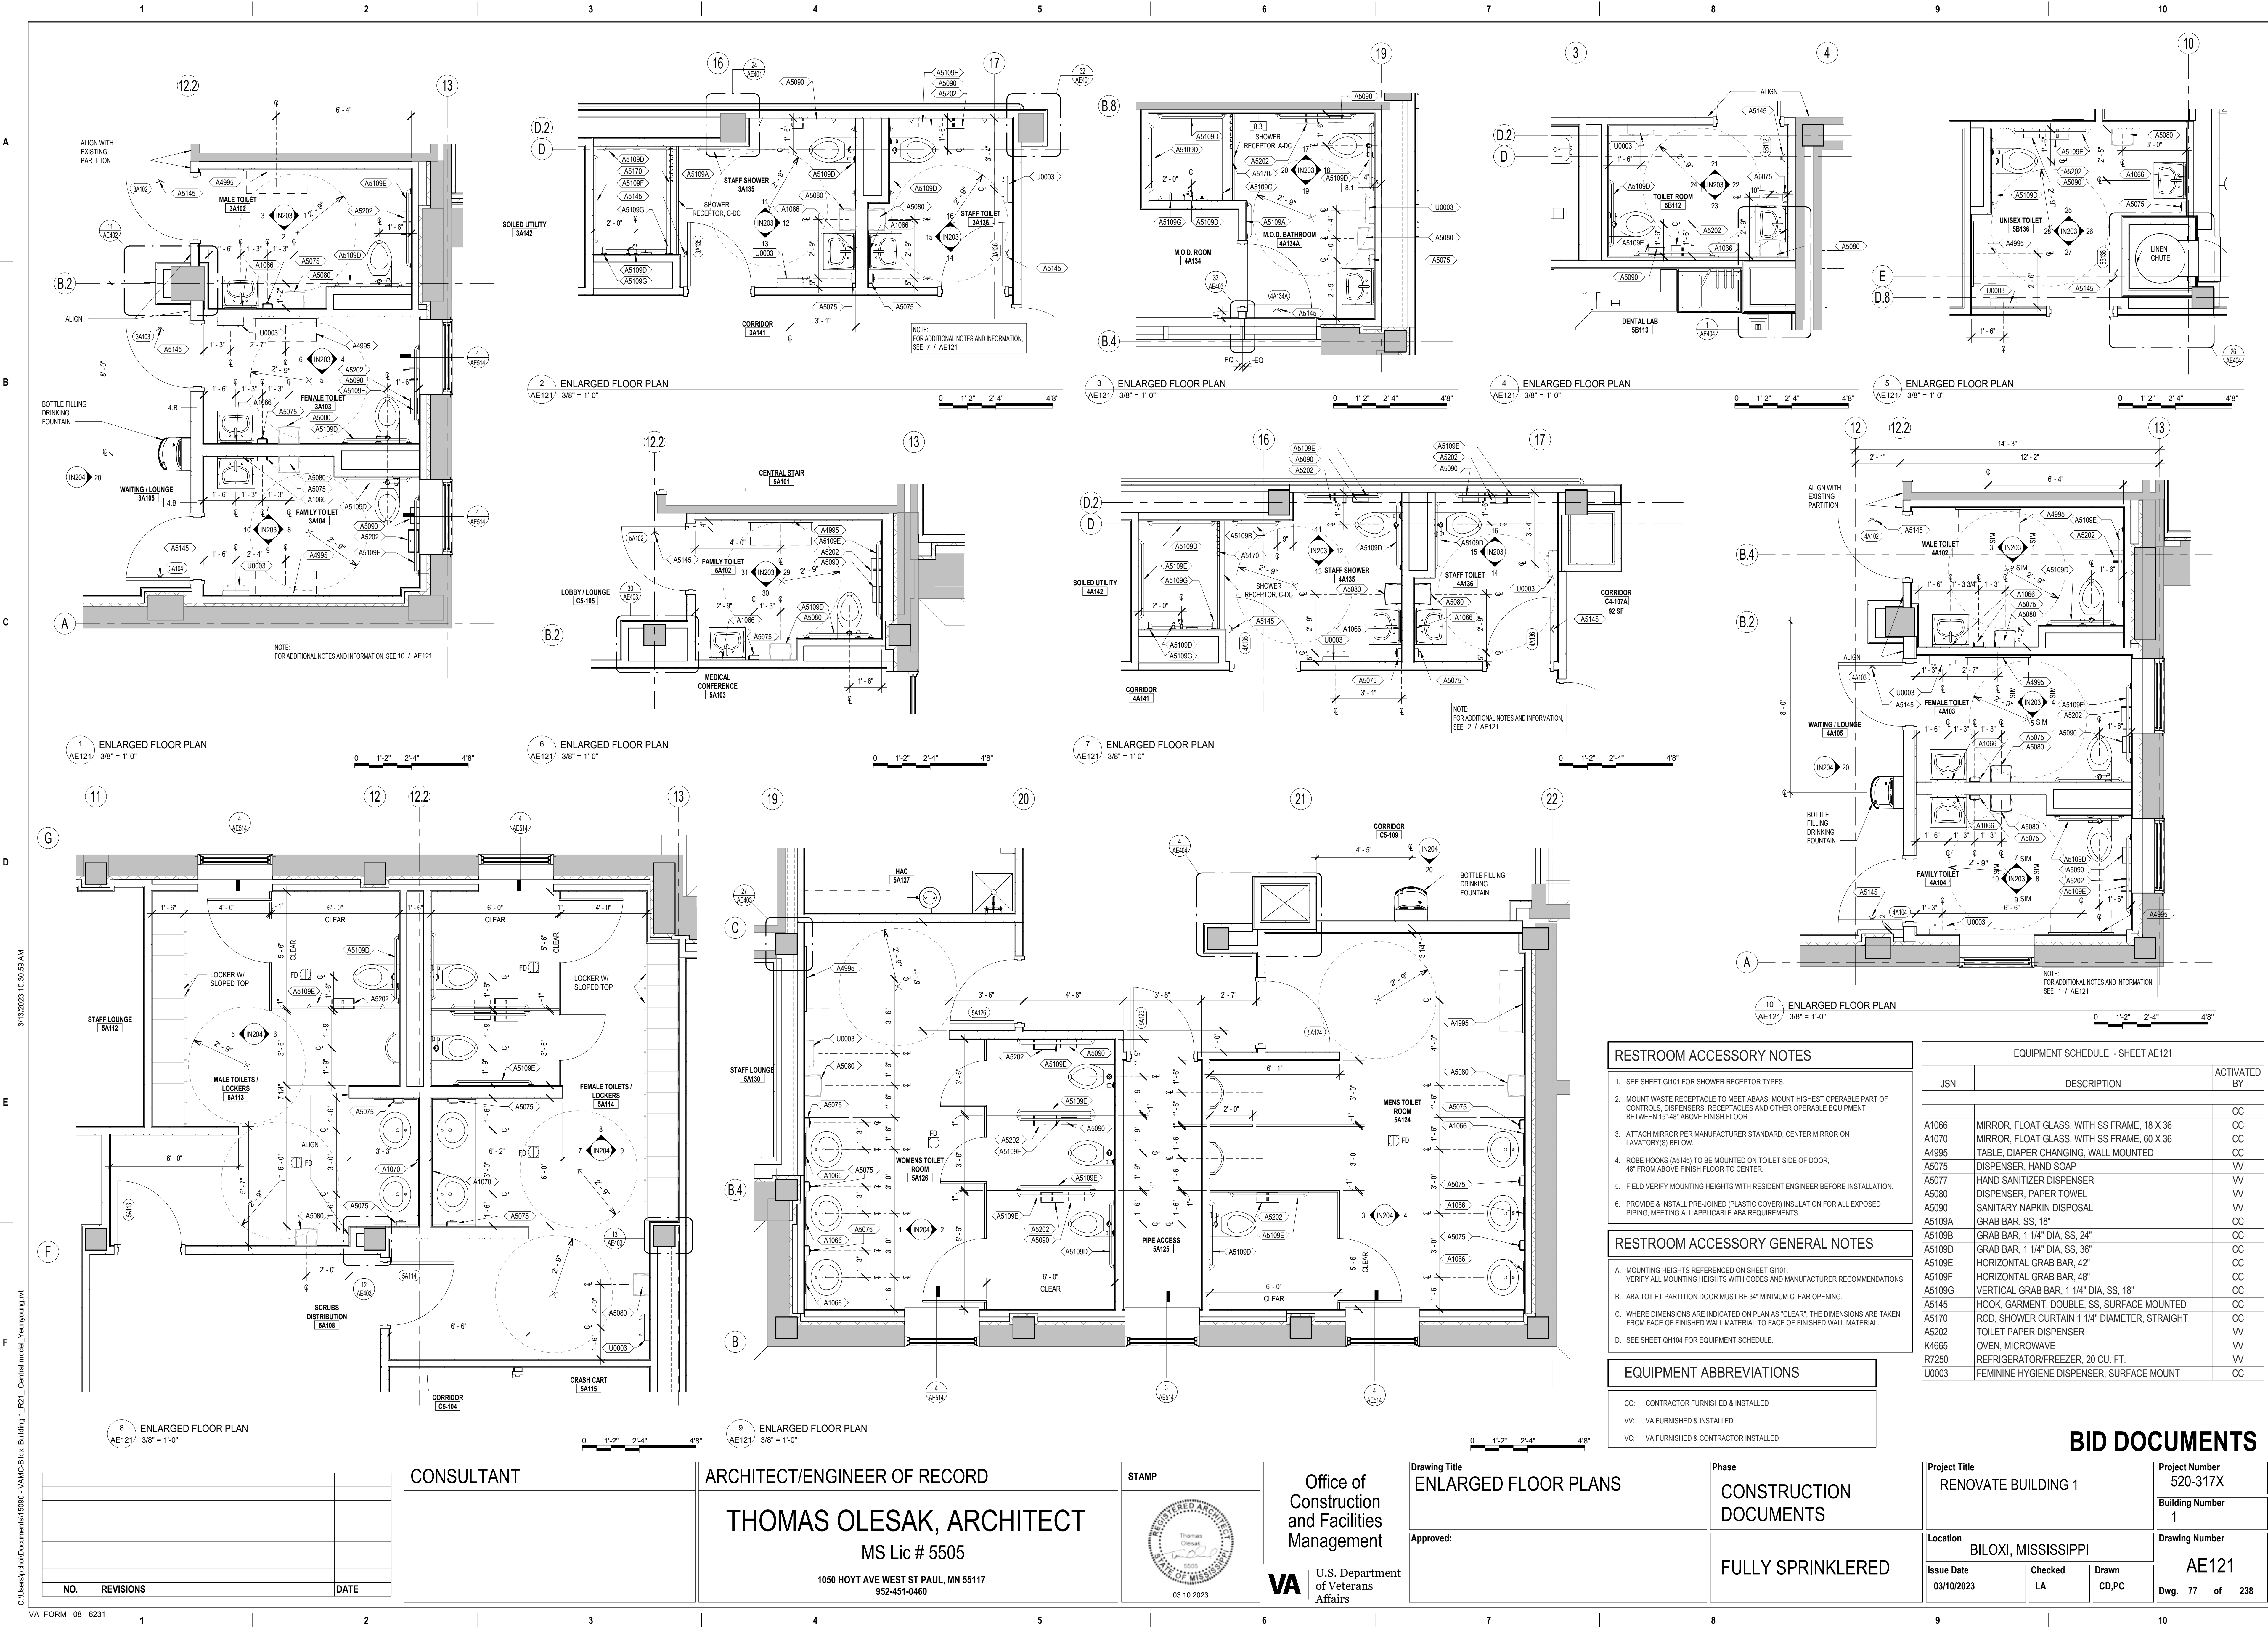

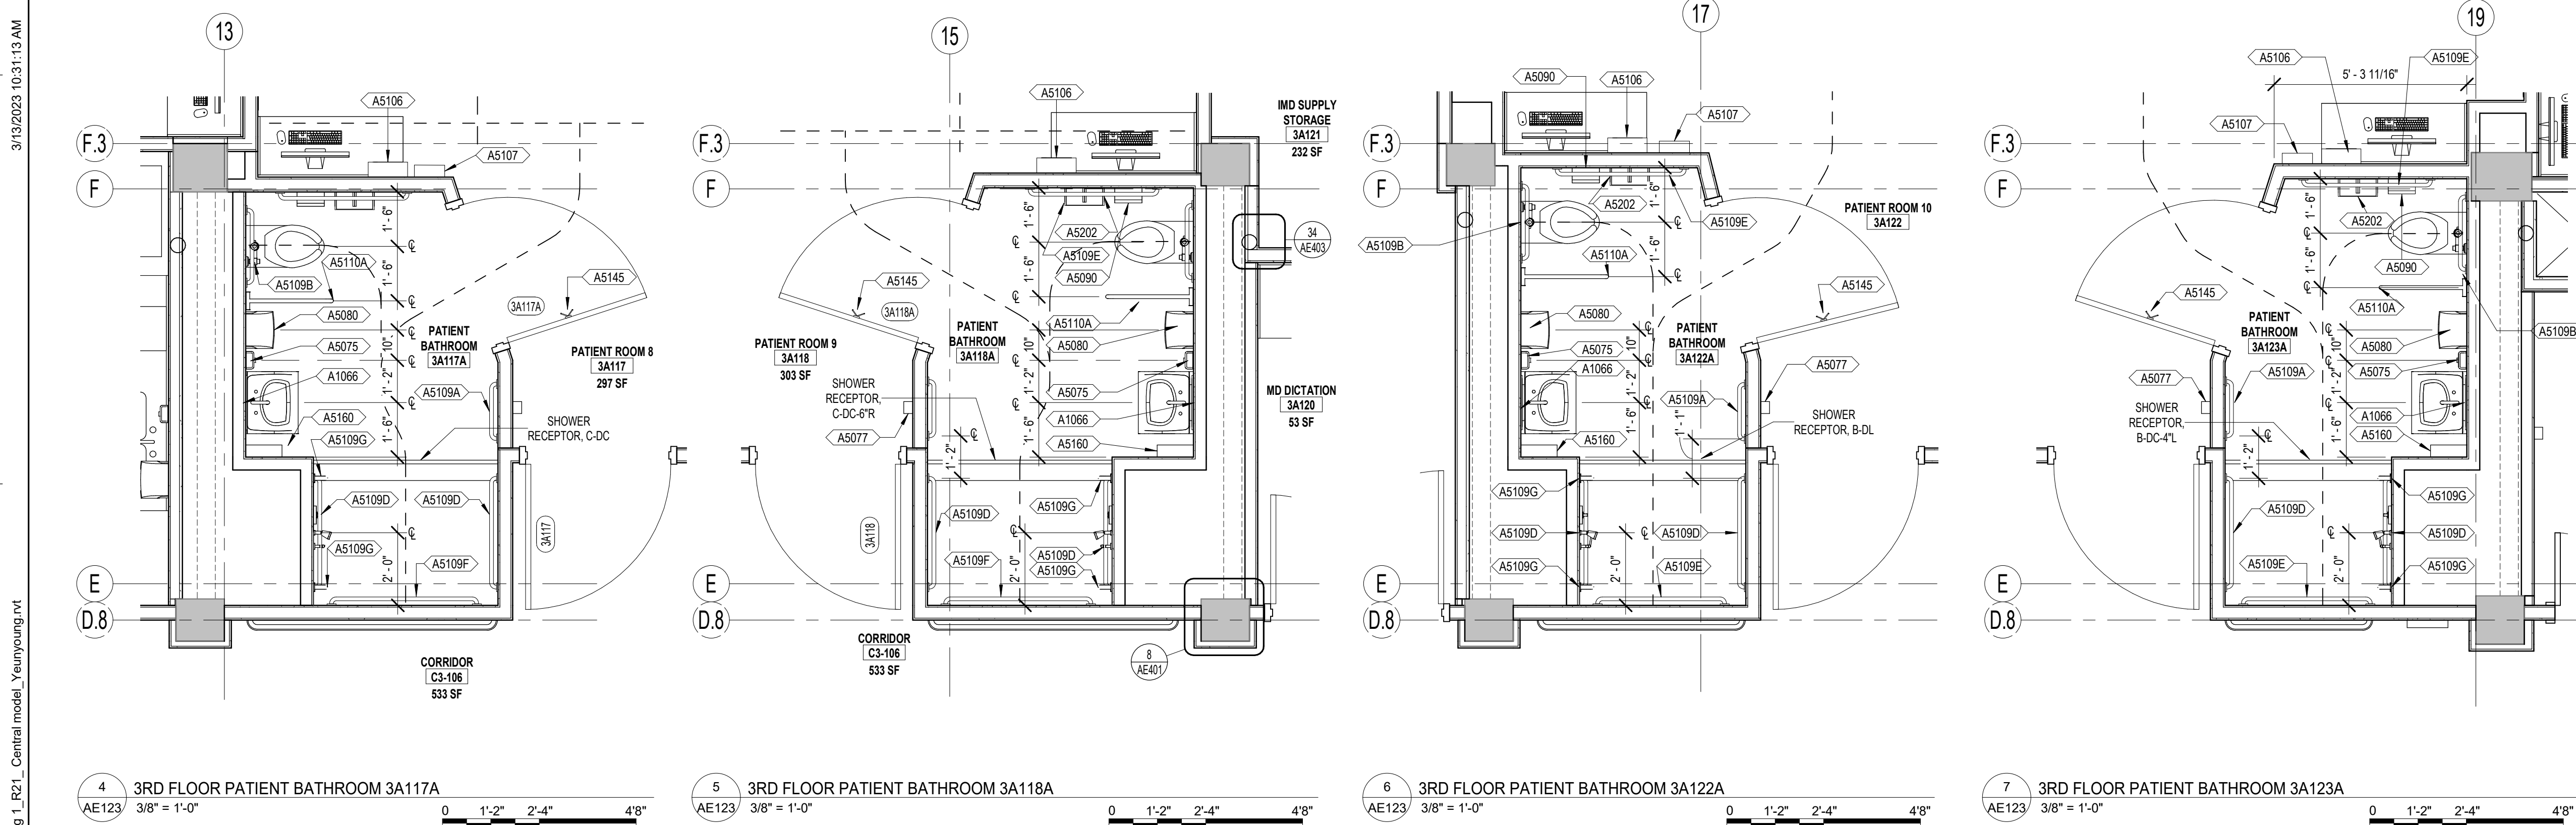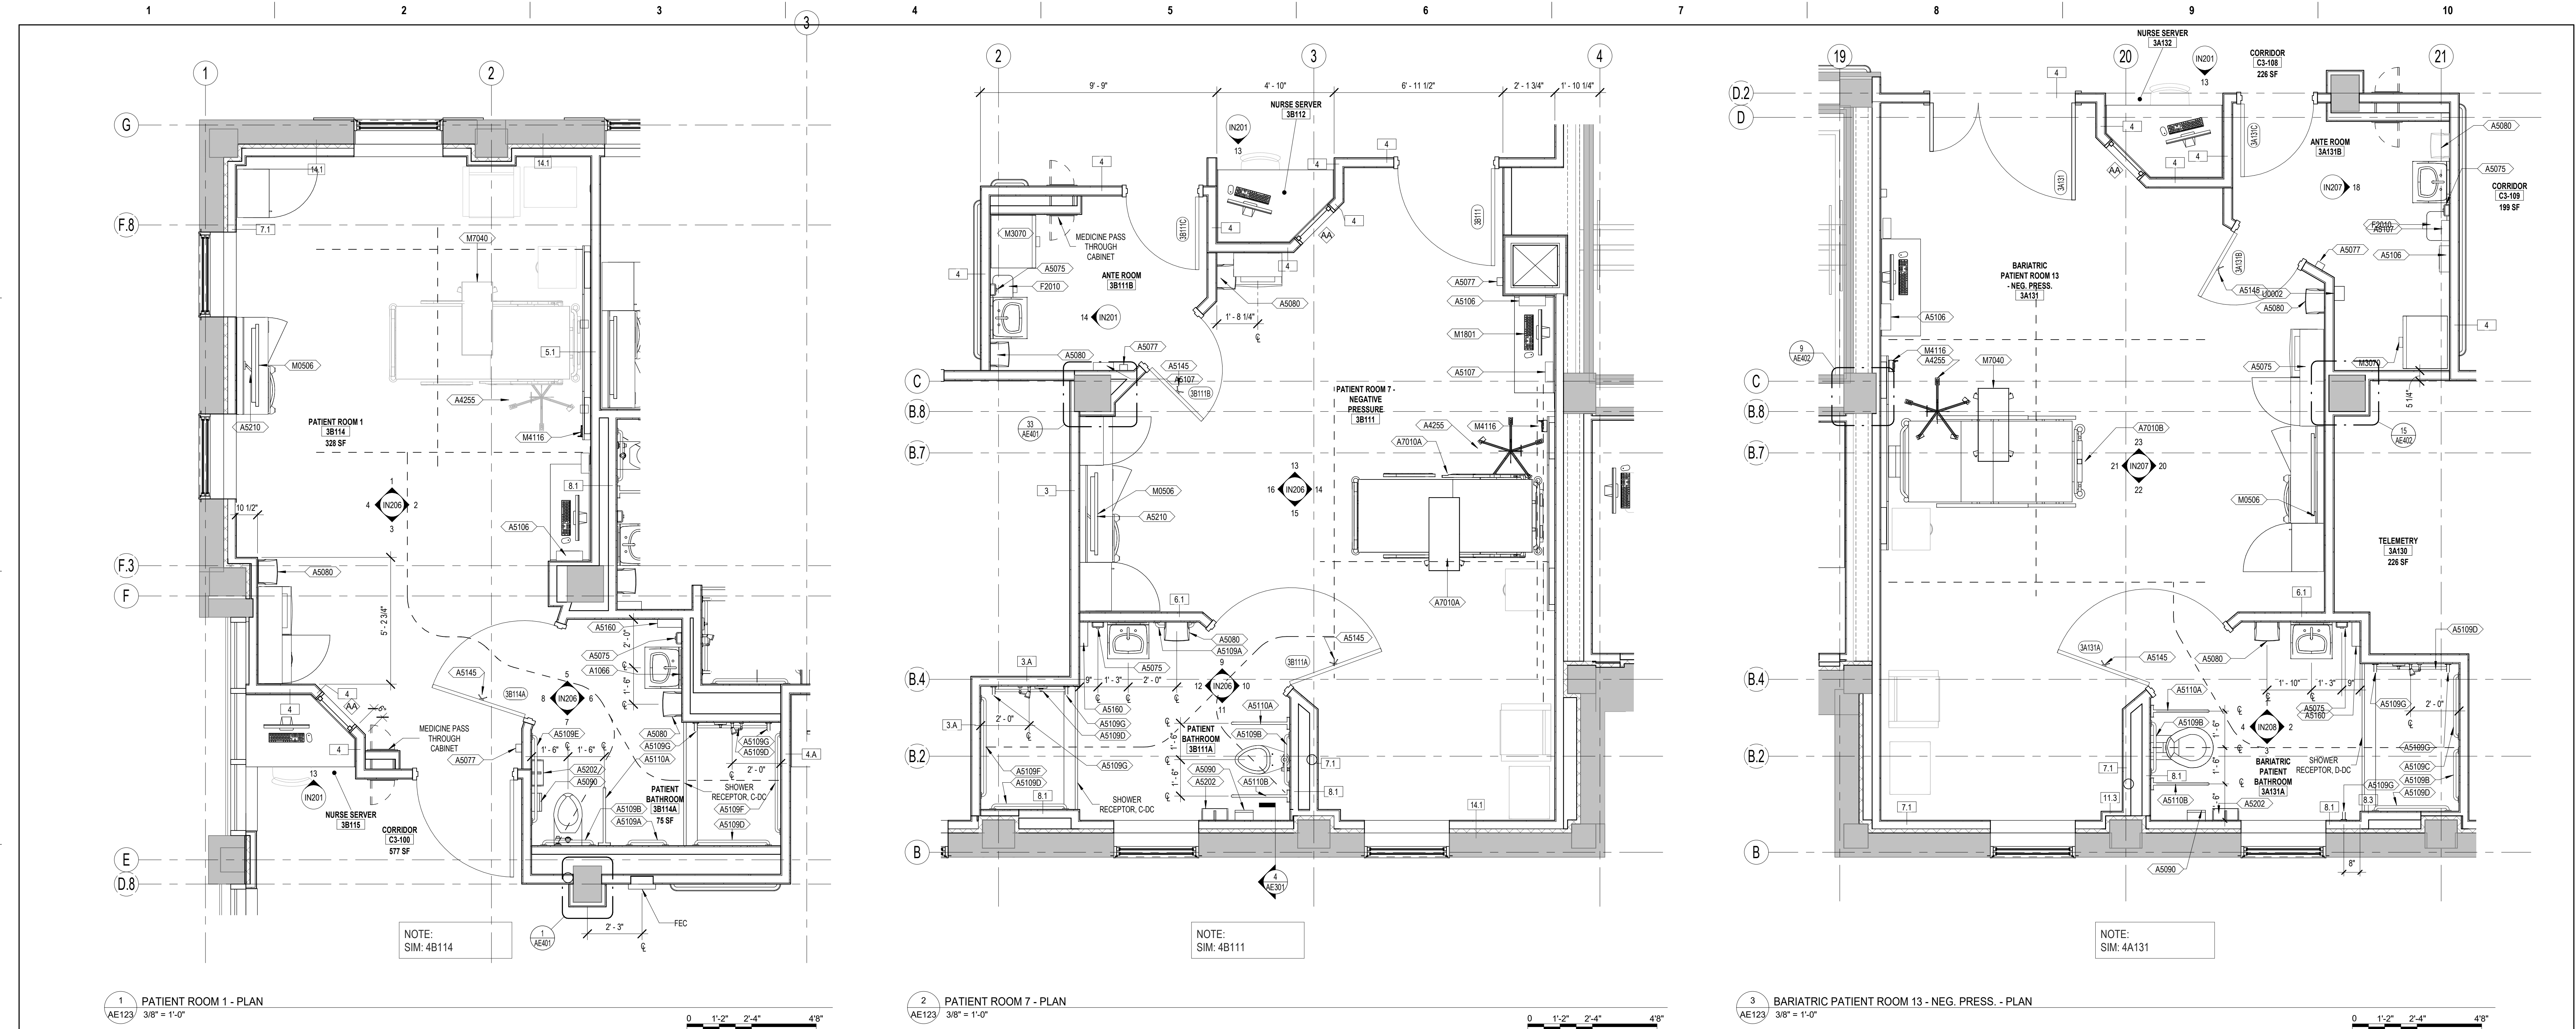

EQUIPMENT SCHEDULE - SHEET AE123		
JSN	DESCRIPTION	ACTIVATED BY
A1066	MIRROR, FLOAT GLASS, WITH SS FRAME, 18 X 36	CC
A5075	DISPENSER, HAND SOAP	VV
A5077	HAND SANITIZER DISPENSER	VV
A5080	DISPENSER, PAPER TOWEL	VV
A5090	SANITARY NAPKIN DISPOSAL	VV
A5106	WASTE DISPOSAL UNIT, SHARPS	VV
A5107	GLOVE DISPENSER RACK	VV
A5109A	GRAB BAR, SS, 18"	CC
A5109B	GRAB BAR, 1 1/4" DIA, SS, 24"	CC
A5109D	GRAB BAR, 1 1/4" DIA, SS, 36"	CC
A5109E	HORIZONTAL GRAB BAR, 42"	CC
A5109F	HORIZONTAL GRAB BAR, 48"	CC
A5109G	VERTICAL GRAB BAR, 1 1/4" DIA, SS, 18"	CC
A5110A	SWING UP GRAB BAR	CC
A5110B	SWING UP GRAB BAR W/TOILET PAPER DISPENSER	CC
A5145	HOOK, GARMENT, DOUBLE, SS, SURFACE MOUNTED	CC
A5160	STAINLESS STEEL SHELF - 12" x 4"	CC
A5202	TOILET PAPER DISPENSER	VV
A7010A	BED, PATIENT, ELECTRONIC	VV
M0506	TV, FLAT SCREEN, 43"	VV
M1801	COMPUTER AND MONITOR	VV
M4116	VITAL SIGNS MONITOR (WELSH ALLYN CVSM)	VV
U0002	PDI WIPE DISPENSER	VV

- RESTROOM ACCESSORY NOTES
1. SEE SHEET G101 FOR SHOWER RECEPTOR TYPES.

2. MOUNT WASTE RECEPTACLE TO MEET ABAS. MOUNT HIGHEST OPERABLE PART OF CONTROLS, DISPENSERS, RECEPTACLES AND OTHER OPERABLE EQUIPMENT BETWEEN 15" - 48" ABOVE FINISH FLOOR.

3. ATTACH MIRROR PER MANUFACTURER STANDARD, CENTER MIRROR ON LAVATORY(S) BELOW.

4. ROBE HOOKS (A5145) TO BE MOUNTED ON TOILET SIDE OF DOOR, 48" FROM ABOVE FINISH FLOOR TO CENTER.

5. FIELD VERIFY MOUNTING HEIGHTS WITH RESIDENT ENGINEER BEFORE INSTALLATION.

6. PROVIDE & INSTALL PRE-JOINED (PLASTIC COVER) INSULATION FOR ALL EXPOSED PIPING, MEETING ALL APPLICABLE ABA REQUIREMENTS.

- RESTROOM ACCESSORY GENERAL NOTES
- A. MOUNTING HEIGHTS REFERENCED ON SHEET G101. VERIFY ALL MOUNTING HEIGHTS WITH CODES AND MANUFACTURER RECOMMENDATIONS.

B. ABA TOILET PARTITION DOOR MUST BE 34" MINIMUM CLEAR OPENING.

C. WHERE DIMENSIONS ARE INDICATED ON PLAN AS "CLEAR", THE DIMENSIONS ARE TAKEN FROM FACE OF FINISHED WALL MATERIAL TO FACE OF FINISHED WALL MATERIAL.

D. SEE SHEET Q104 FOR EQUIPMENT SCHEDULE.


EQUIPMENT ABBREVIATIONS	
CC:	CONTRACTOR FURNISHED & INSTALLED
VV:	VA FURNISHED & INSTALLED
VC:	VA FURNISHED & CONTRACTOR INSTALLED

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD
THOMAS OLESAK, ARCHITECT
MS Lic # 5505
1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

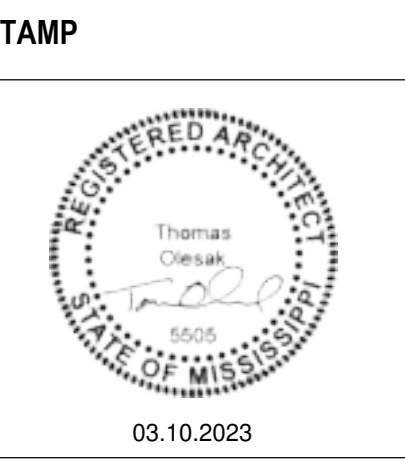

Office of
Construction
and Facilities
Management
VA U.S. Department
of Veterans
Affairs

Drawing Title
ENLARGED FLOOR PLANS
Approved:

Phase
**CONSTRUCTION
DOCUMENTS**
FULLY SPRINKLERED

Project Title RENOVATE BUILDING 1		Project Number 520-317X
Location BILOXI, MISSISSIPPI		Building Number 1
Issue Date 03/10/2023	Checked LA	Drawn CD,PC
Dwg. 79 of 238		Drawing Number AE123

DENTAL LAB GENERAL NOTES

- DENTAL LAB CASEWORK AND WORK BENCHES ARE SPECIFIED IN SECTION 12 35 40. VENDOR DRAWINGS ARE PROVIDED IN APPENDIX. CC SHALL COORDINATE INSTALLATION OF UTILITY CONNECTIONS WITH REQUIREMENTS SPECIFIED AND SHOWN THEREIN.
- AVOID CUTTING CONCRETE FLOOR JOIST.

EQUIPMENT ABBREVIATIONS

- CC: CONTRACTOR FURNISHED & INSTALLED
VV: VA FURNISHED & INSTALLED
VC: VA FURNISHED & CONTRACTOR INSTALLED


EQUIPMENT SCHEDULE - SHEET AE124

JSN	DESCRIPTION	ACTIVATED BY	Comments
A1012	TELEPHONE, WALL MOUNTED	VV	
A1066	MIRROR, FLOAT GLASS, WITH SS FRAME, 18 X 36	CC	
A5075	DISPENSER, HAND SOAP	VV	
A5077	HAND SANITIZER DISPENSER	VV	
A5080	DISPENSER, PAPER TOWEL	VV	
A5106	WASTE DISPOSAL UNIT, SHARPS	VV	
A5145	HOOK, GARMENT, DOUBLE, SS, SURFACE MOUNTED	CC	
D0670	CONSOLE, TREATMENT UNIT, DENTAL OPERATORY	CC	SEE SPEC SECTION 12 35 70.74
D0680	CONSOLE, ACCESSORY/SIDE DENTAL OPERATORY	CC	SEE SPEC SECTION 12 35 70.74
D0682	3 GLOVE DISPENSING CABINET, DENTAL OPERATORY	CC	SEE SPEC SECTION 12 35 70.74
D0685	STORAGE CABINET, DENTAL OPERATORY - 34 INCH WIDE	CC	SEE SPEC SECTION 12 35 70.74
D0685B	STORAGE CABINET, FULL HEIGHT, 2 DOORS, LOCKABLE DENTAL	CC	SEE SPEC SECTION 12 34 50, SEE EP103 & PL106 MEP FOR CONNECTIONS
D0755	TANK ASSEMBLY, BOILOUT - CURING, DOUBLE	CC	SEE SPEC SECTION 12 35 70.74
D2520	MOBILE STORAGE CABINET	CC	SEE SPEC SECTION 12 35 70.74
D3320	CHAIR, DENTAL OPERATING	CC	SEE SPEC SECTION 11 74 00
D3565	RESIN CURING UNIT, VISABLE LIGHT	VV	
D4100	CLEANER, STEAM, DENTAL	VV	
D4260	HANDPIECE, LABORATORY, DENTAL, ELECTRIC	VV	
D4320	PRESS, FLASK, HYDRAULIC, SINGLE FLASK	VV	
D4560	ENGINE, DENTAL BENCH, ELECTRIC	VV	
D4590	CHISEL, DENTAL, PNEUMATIC	VV	
D6600	MIXER/INVESTOR, WITH VACUUM	VV	
D6650	FROMER, VACUUM, W/MOTOR, VACCUM PUMP, HEATER	VV	
D8250	DELIVERY SYSTEM, DENTAL OPERATORY WITH ASST INSTRUMENTATION	CC	SEE SPEC SECTION 11 74 00
D8530	DENTAL POLISHER	VV	
D8850	AMAL GAMATOR, DENTAL	VV	
D8950	VIBRATOR, DENTAL, HEAVY DUTY	VV	
D9015	MICROFINISHER, DENTAL, COUNTER MOUNTED	VV	
D9035	DRIVER, MODEL INDEXING PINS	VV	
D9050	TRIMMER, MODEL, DENTAL 0.25 HP	VV	
DX001	PRESSURE POT 8 QUART	VV	
DX002	DENTAL WORK BENCH, 23" DEPTH	VC	SEE SPEC SECTION 12 34 50
DX003	AIR HOSE X6 + ACCESSORIES	VV	
DX004	SAND SHELL XL	VV	
DX005	WAXING UNIT	VV	
DX006	TOUCH O MATIC BUN BURNER NATURAL GAS #77-0	VV	
DX007	AIR PURIFIER 301F	VV	
DX008	SAND VAC GRAY	VV	
DX009	ATLAS UPPER FLASK W/REAR GUIDE PIN #44U	VV	
DX010	ATLAS LOWER FLASK W/REAR GUIDE PIN #44L	VV	
DX011	COMPRESS FLASKS F2	VV	
DX012	RELINING JIG 2 POST	VV	
DX013	IMPULSE HEAT SEALER	VV	
DX014	FLAMMABLE CABINET	VV	
DX016	ARTICULATOR MOUNTING PLATE	VV	
DX017	HANAU WIDE - VUE ARTICULATOR HANAU ARCON 183-2	VV	
DX018	WHIP MIX MODEL 2240 ARTICULATOR W/SERIES 200 FRAME	VV	
DX019	CURING UNIT	VV	
DX020	DENTAL MOLDING VIBRATOR	VV	
DX021	FUME HOOD	CC	SEE SPEC SECTION 23 38 13
DX023	DENTAL LAB CASEWORK	VC	SEE SPEC SECTION 12 34 50
M1801A	LAPTOP COMPUTER	VV	
M1803	COMPUTER WORKSTATION, WALL MOUNTED	CC	
P7650	TRAP, PLASTER, SMALL	CC	
X6600	RADIOGRAPHIC XRAY UNIT (PLANMECA PRO-X)	VV	
X6610	SENSOR, DENTAL IMAGING SYSTEM (PLANMECA PRO-X)	VV	
X6620	EXPOSURE SWITCH - DENTAL XRAY (PLANMECA PRO-X)	VV	

NOTE: LAB CASEWORK AND DENTAL WORK BENCHES SHOWN ARE FOR REFERENCE ONLY. REFER TO VENDOR DRAWINGS IN APPENDIX & SPECIFICATION SECTION 12 35 40.

0 1'-2" 2'-4" 4'-8"


1 DENTAL LAB 5B113 & SHIPPING/RECEIVING ROOM 5B110
AE124 3/8" = 1'-0"

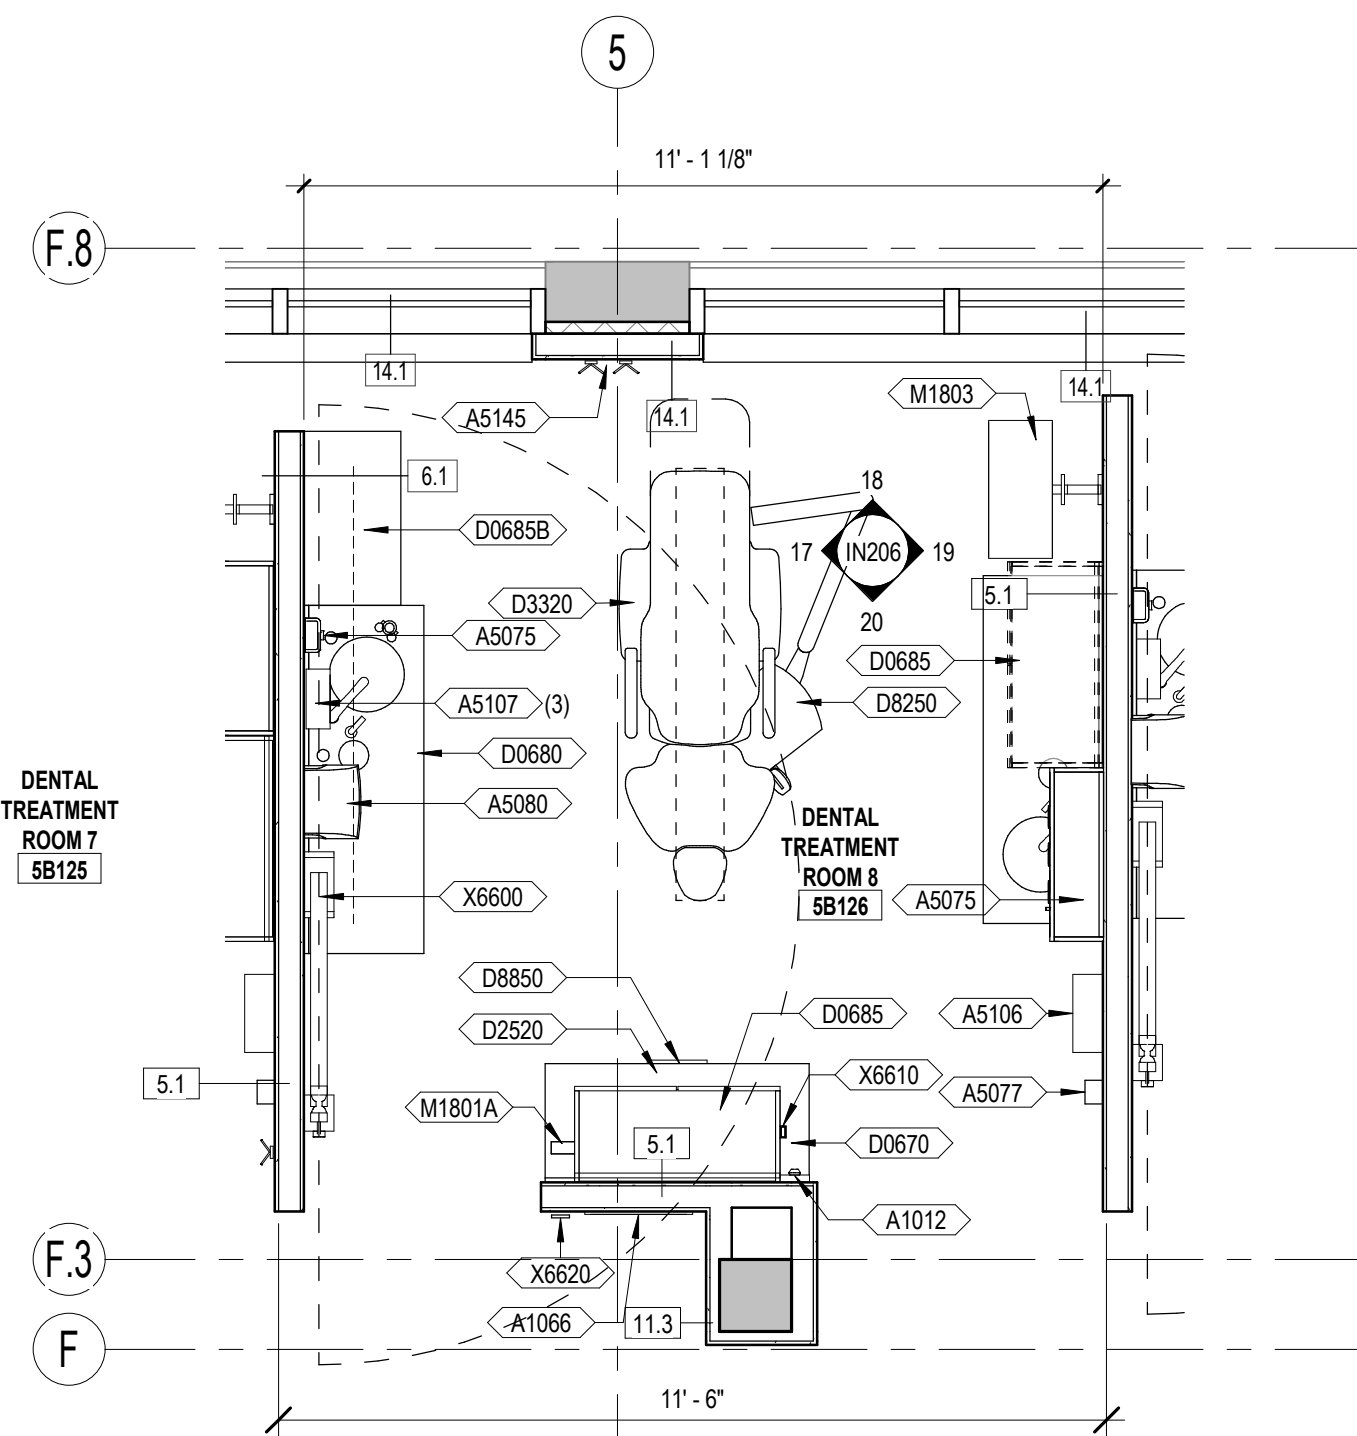

NOTE:
SIM: 5B116, 5B117, 5B118, 5B119, 5B120, 5B121, 5B125, 5B133, 5B139

2 DENTAL TREATMENT ROOM
AE124 3/8" = 1'-0"


0 1'-2" 2'-4" 4'-8"

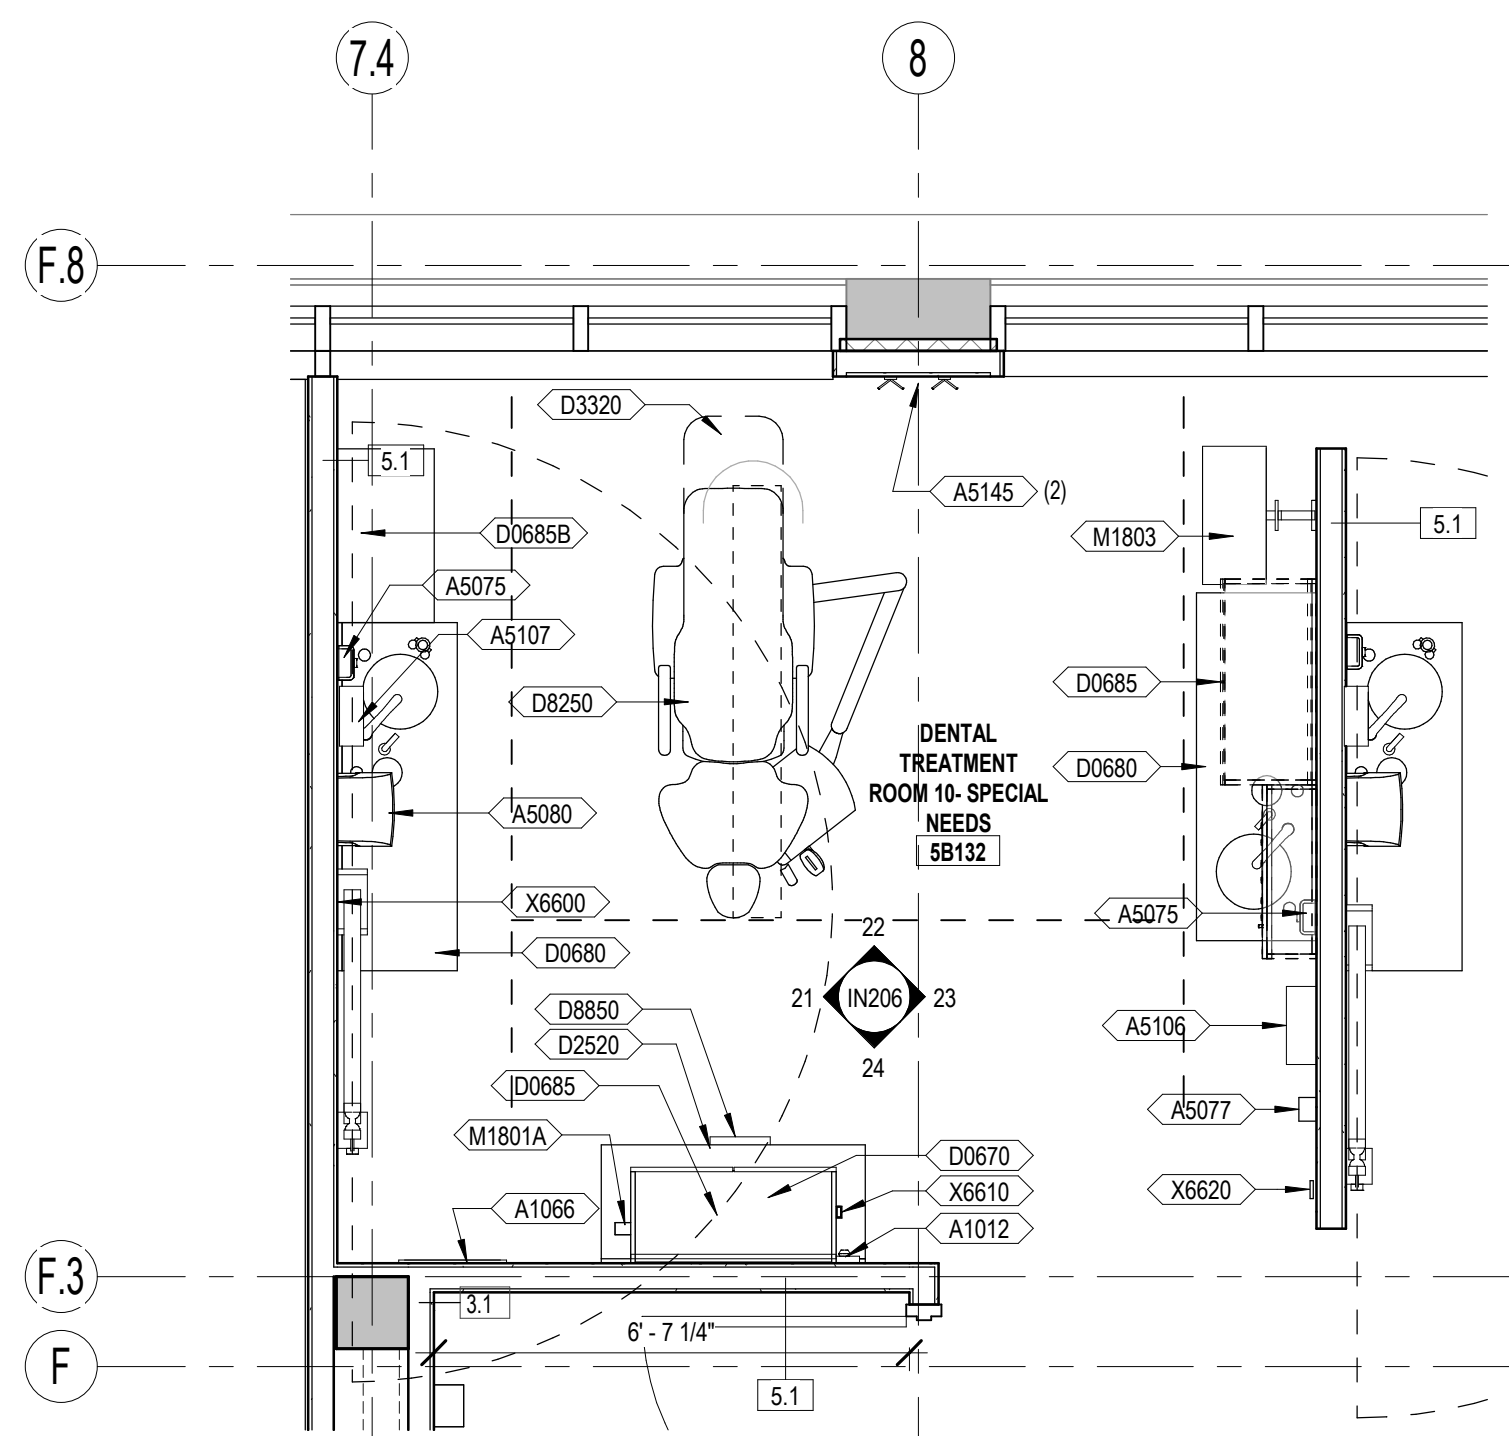

NOTE:
SIM: 5B127


3 DENTAL TREATMENT ROOM 10 - SPECIAL NEEDS
AE124 3/8" = 1'-0"

0 1'-2" 2'-4" 4'-8"

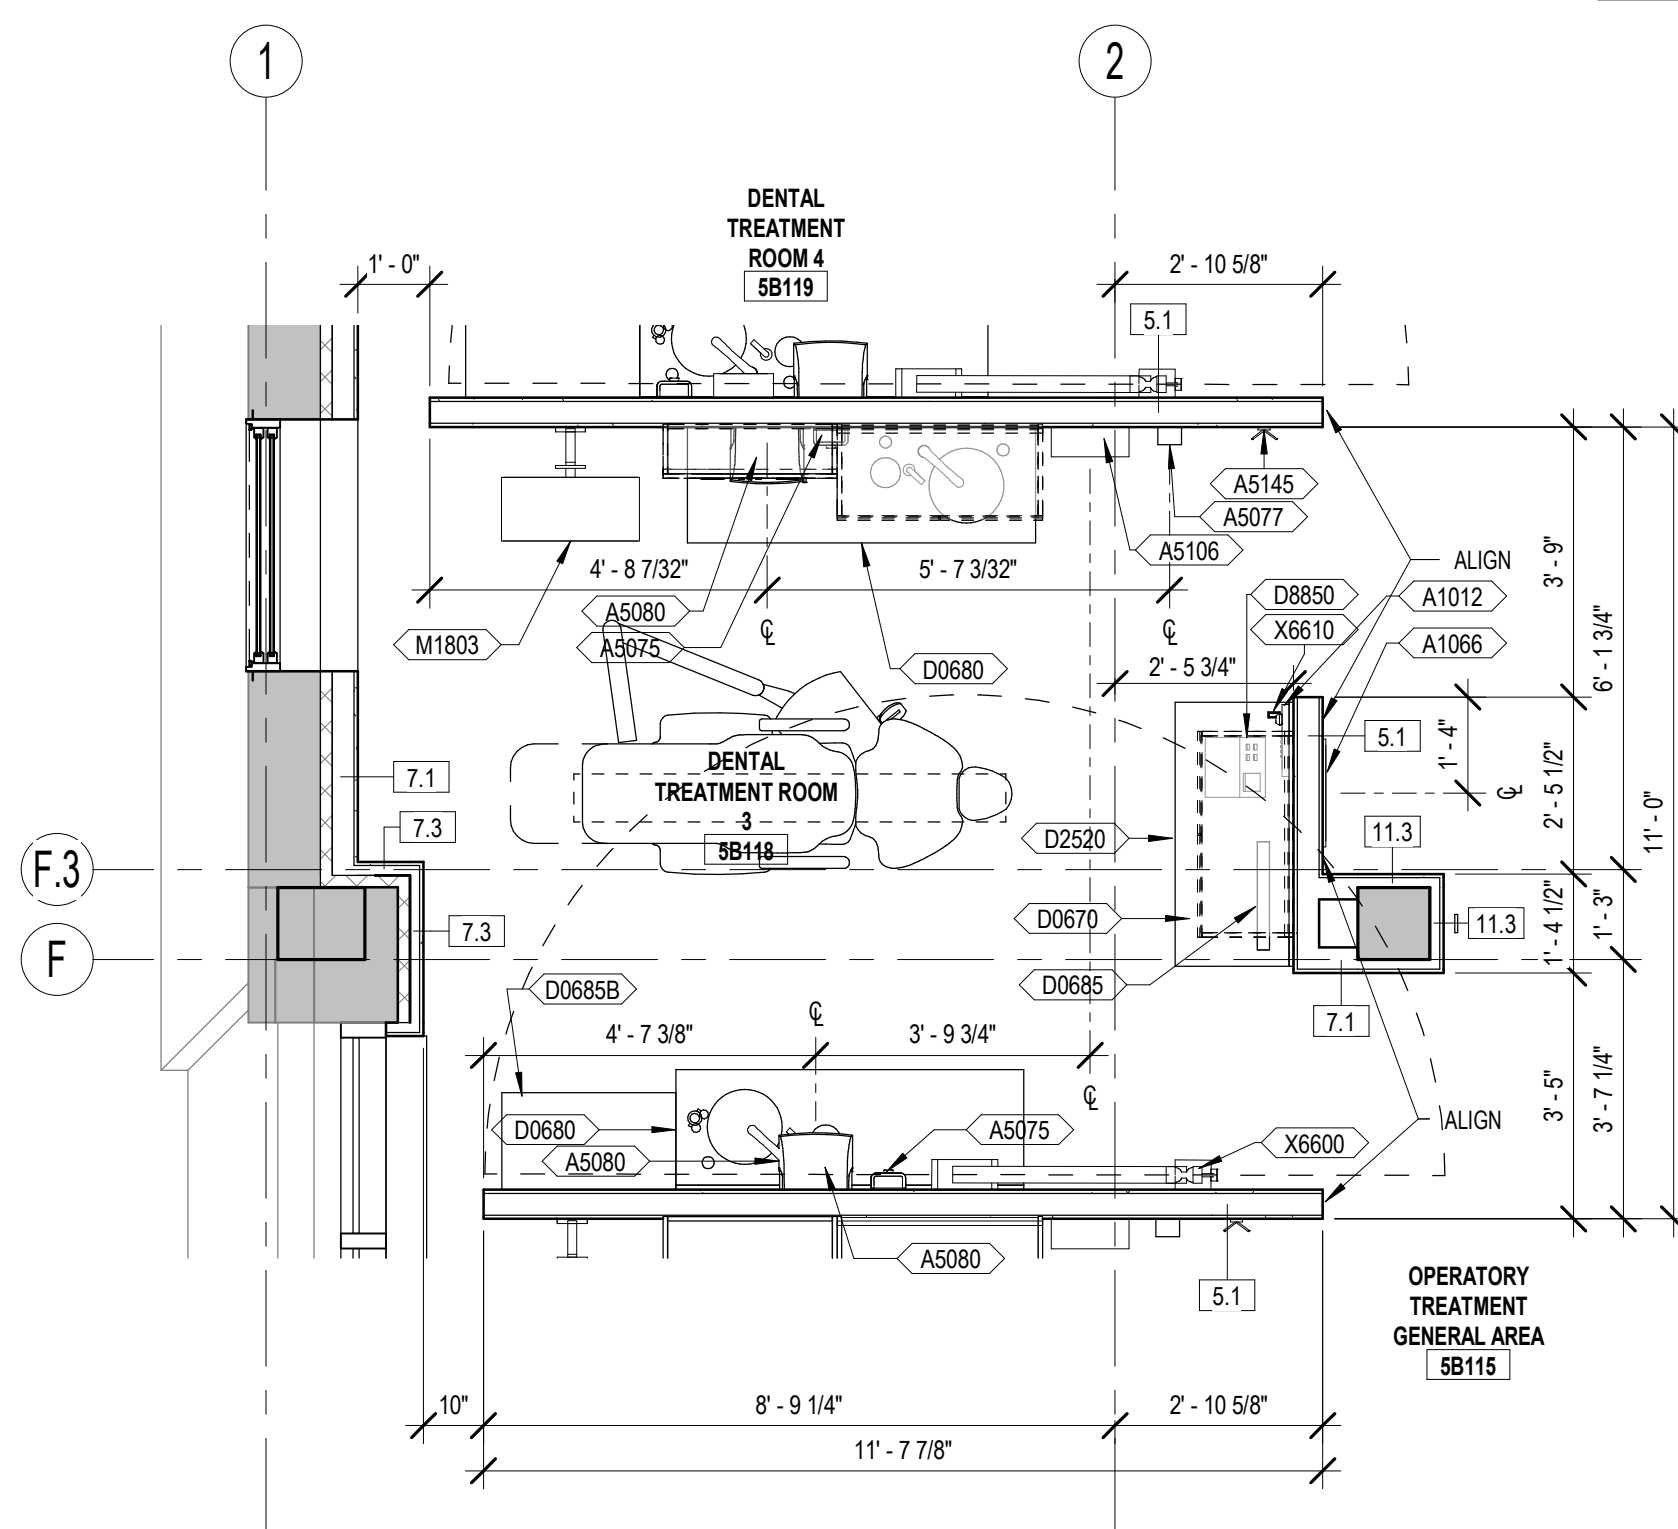

4 DENTAL TREATMENT ROOM 3
AE124 3/8" = 1'-0"

0 1'-2" 2'-4" 4'-8"

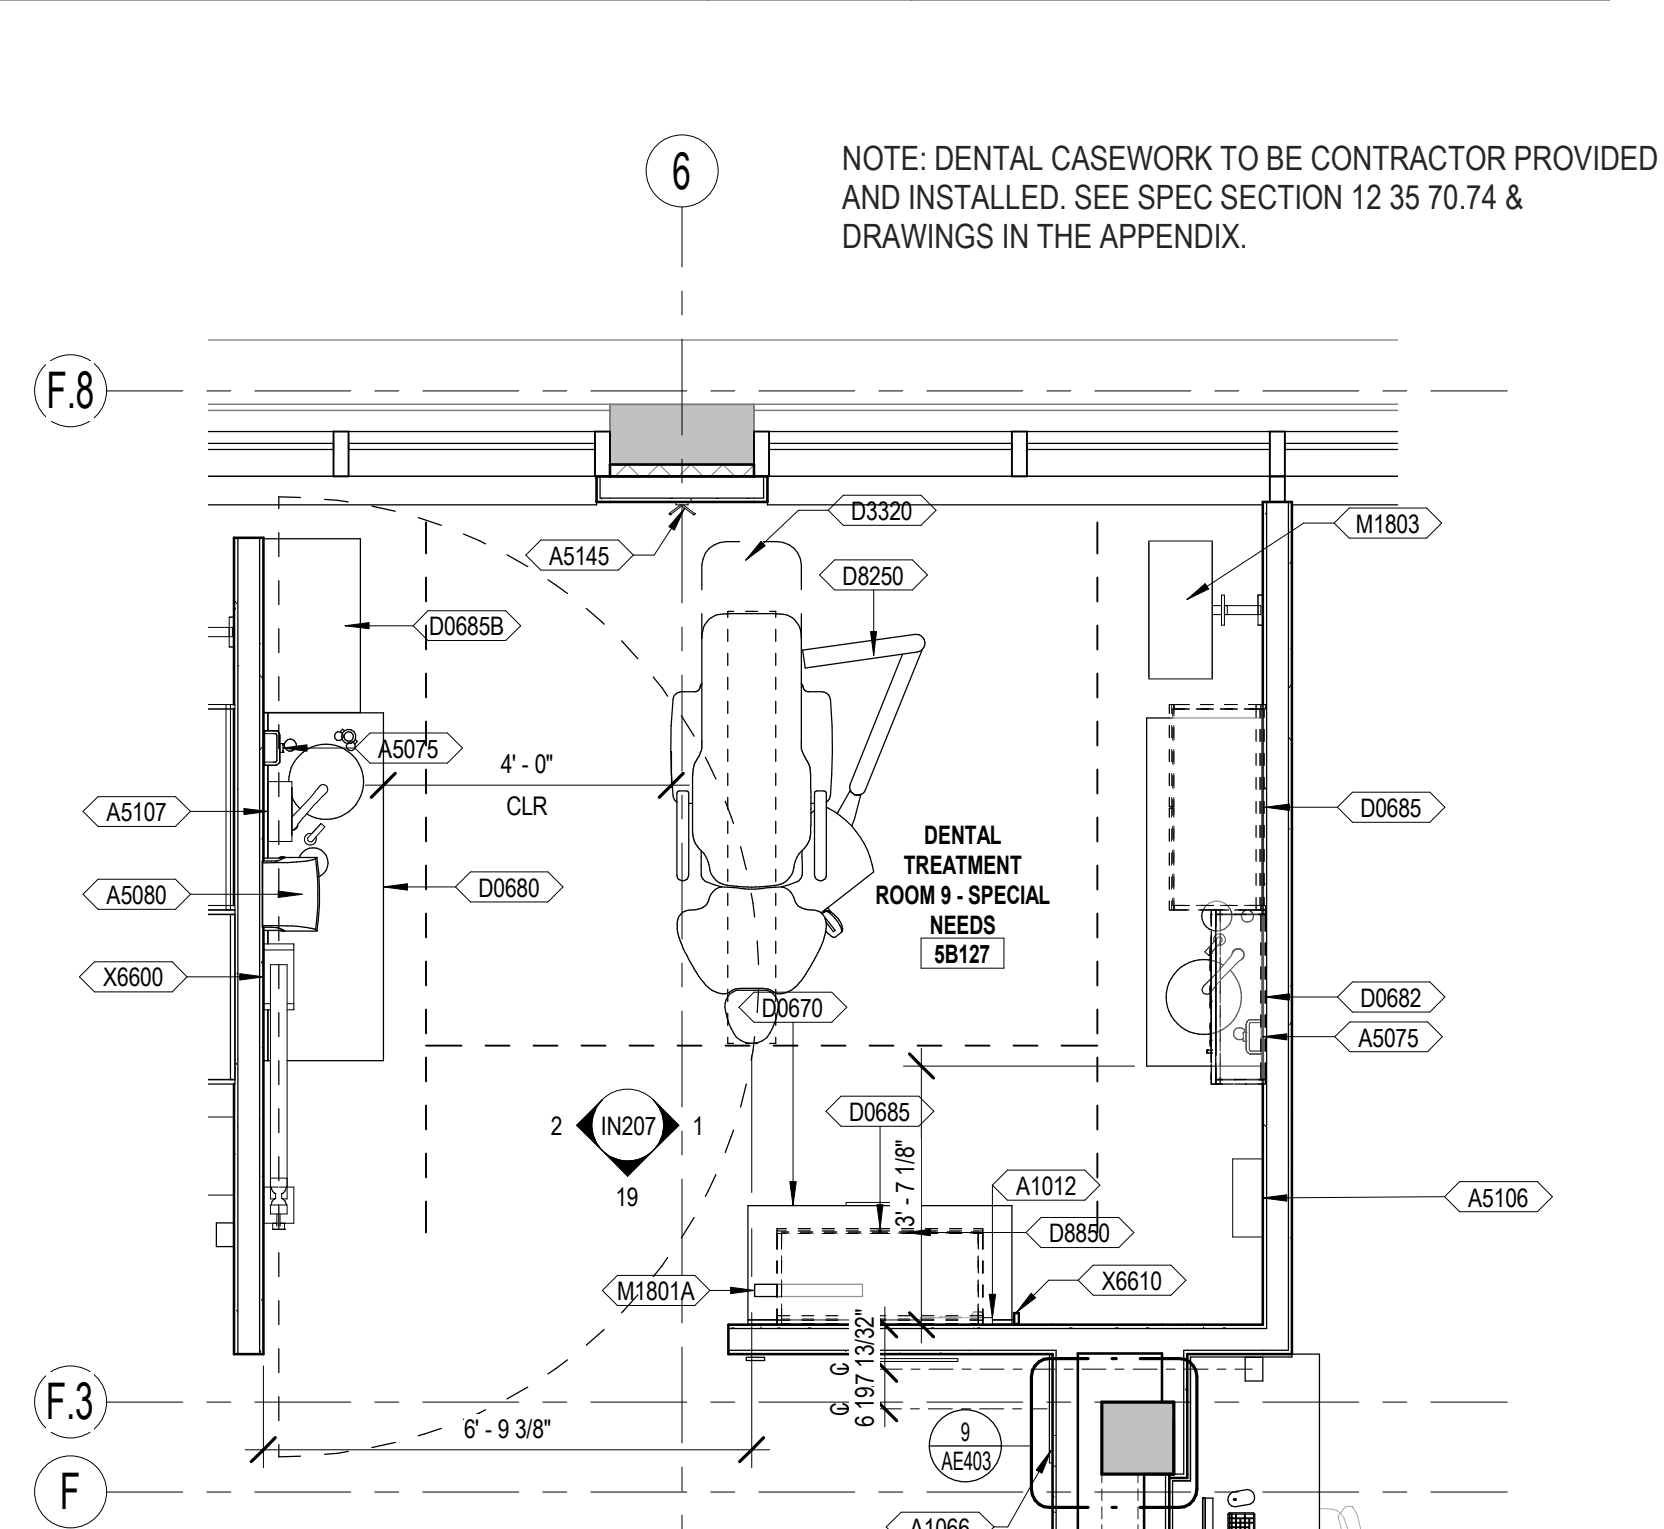

5 DENTAL TREATMENT ROOM 9 - SPECIAL NEEDS
AE124 3/8" = 1'-0"

0 1'-2" 2'-4" 4'-8"

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD

THOMAS OLESAC, ARCHITECT
MS Lic # 5505

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP



Office of
Construction
and Facilities
Management

VA

U.S. Department
of Veterans
Affairs

Drawing Title

ENLARGED FLOOR PLANS

Approved:

Phase

CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

Project Title

RENOVATE BUILDING 1

Location

BILOXI, MISSISSIPPI

Issue Date

03/10/2023

Checked

LA

Drawn

CD,PC

Project Number

520-317X

Building Number

1

Drawing Number

AE124

Dwg. 80 of 238

A

B


C

D


E

F


3/13/2023 10:31:27 AM
C:\Users\pjd\Documents\15950 - VAHC-Bldg Building 1_R21 - Dental.mxd_Yeunyoung.n

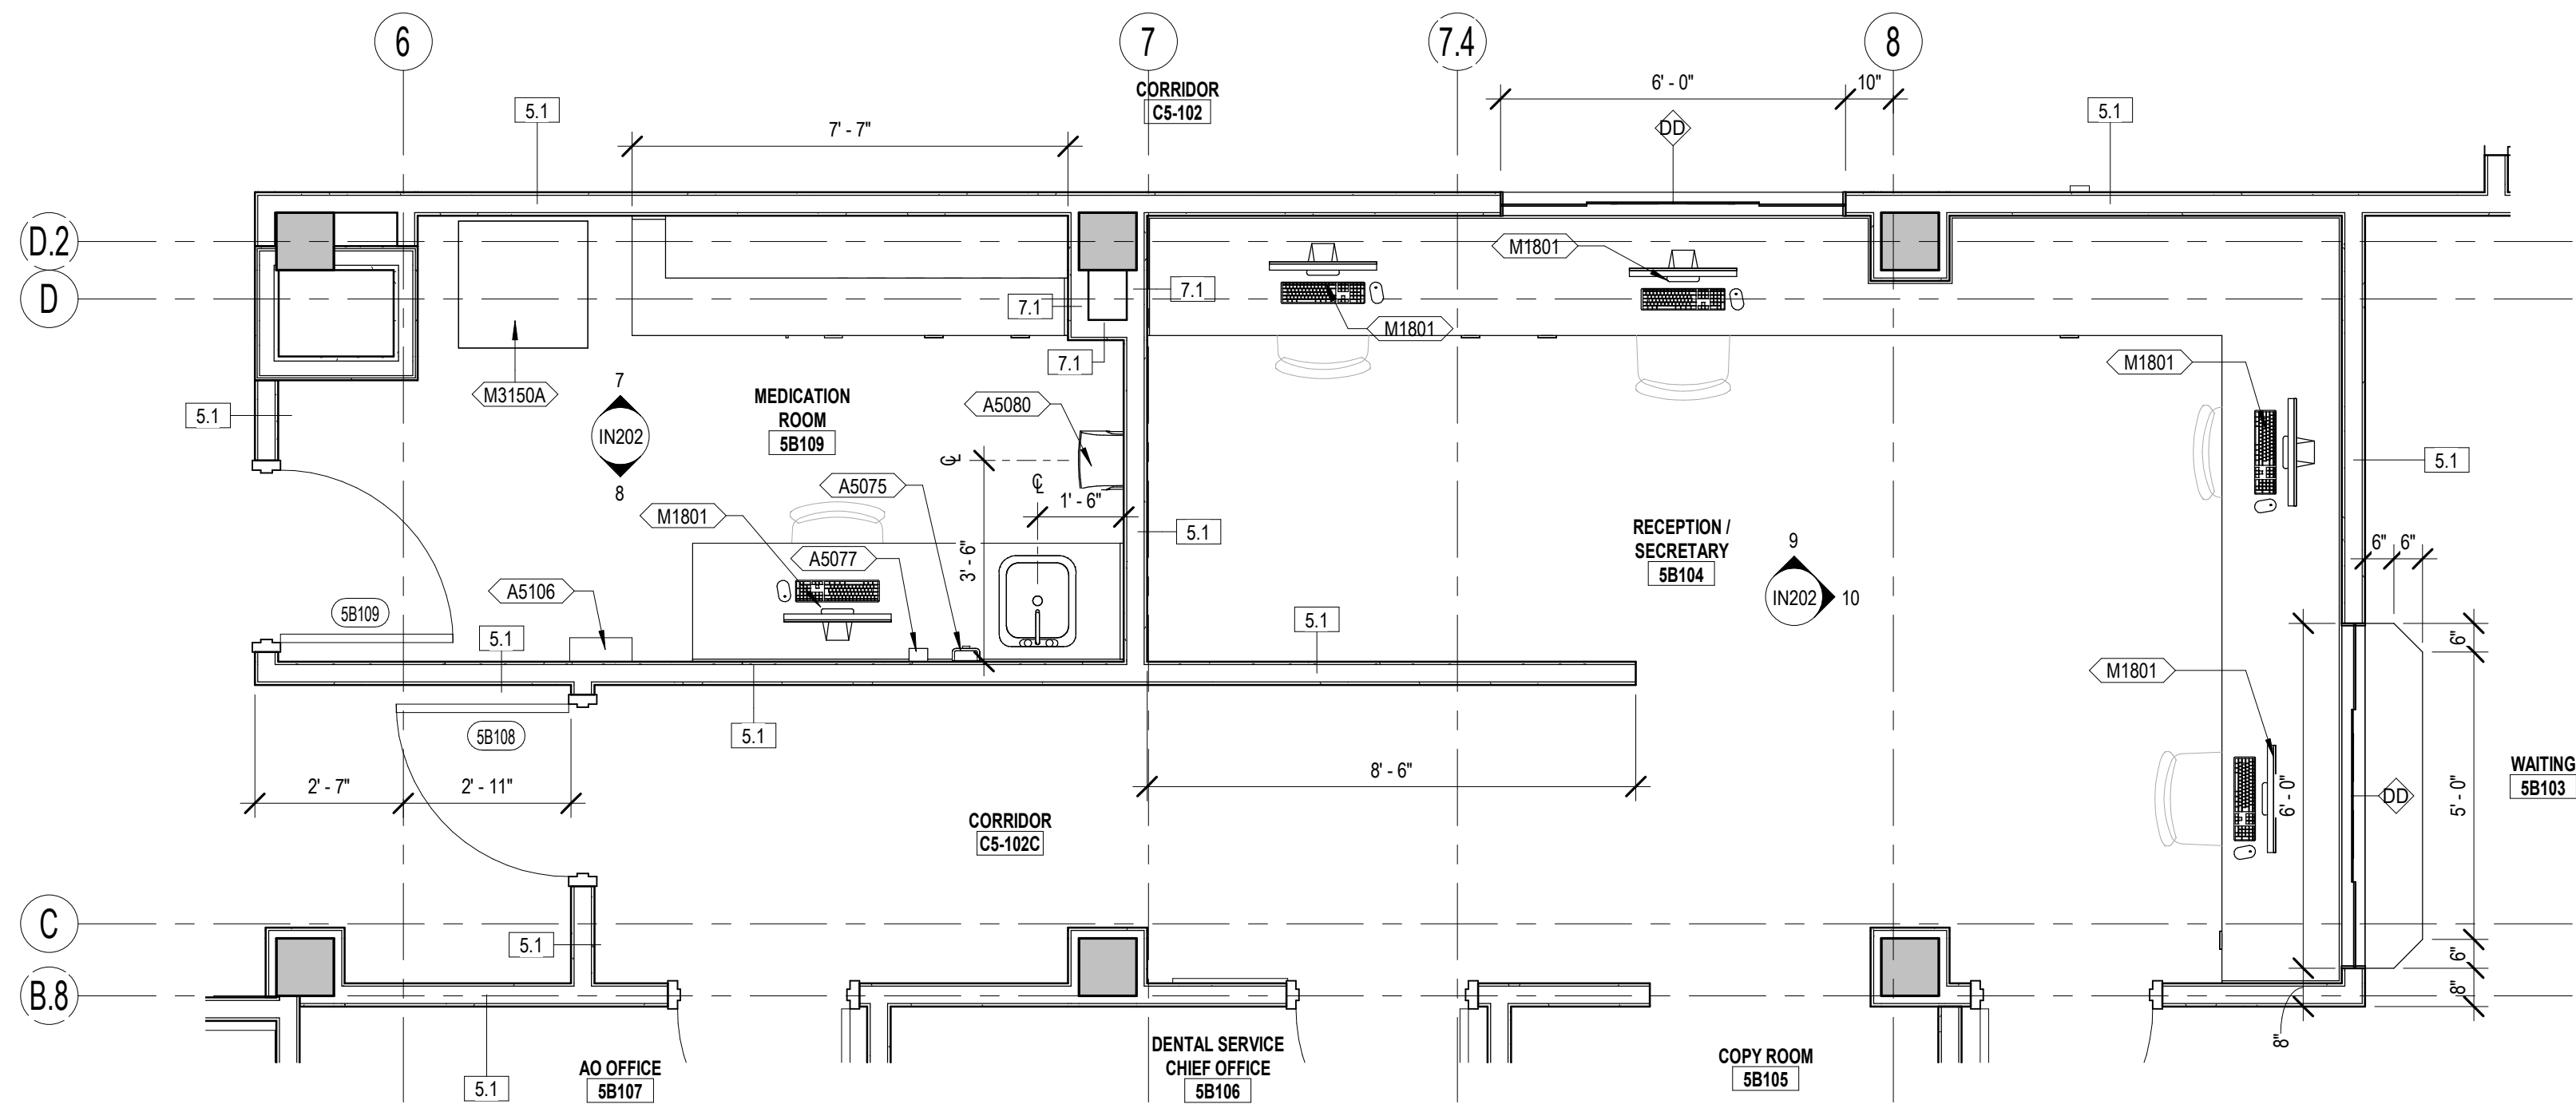


1 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

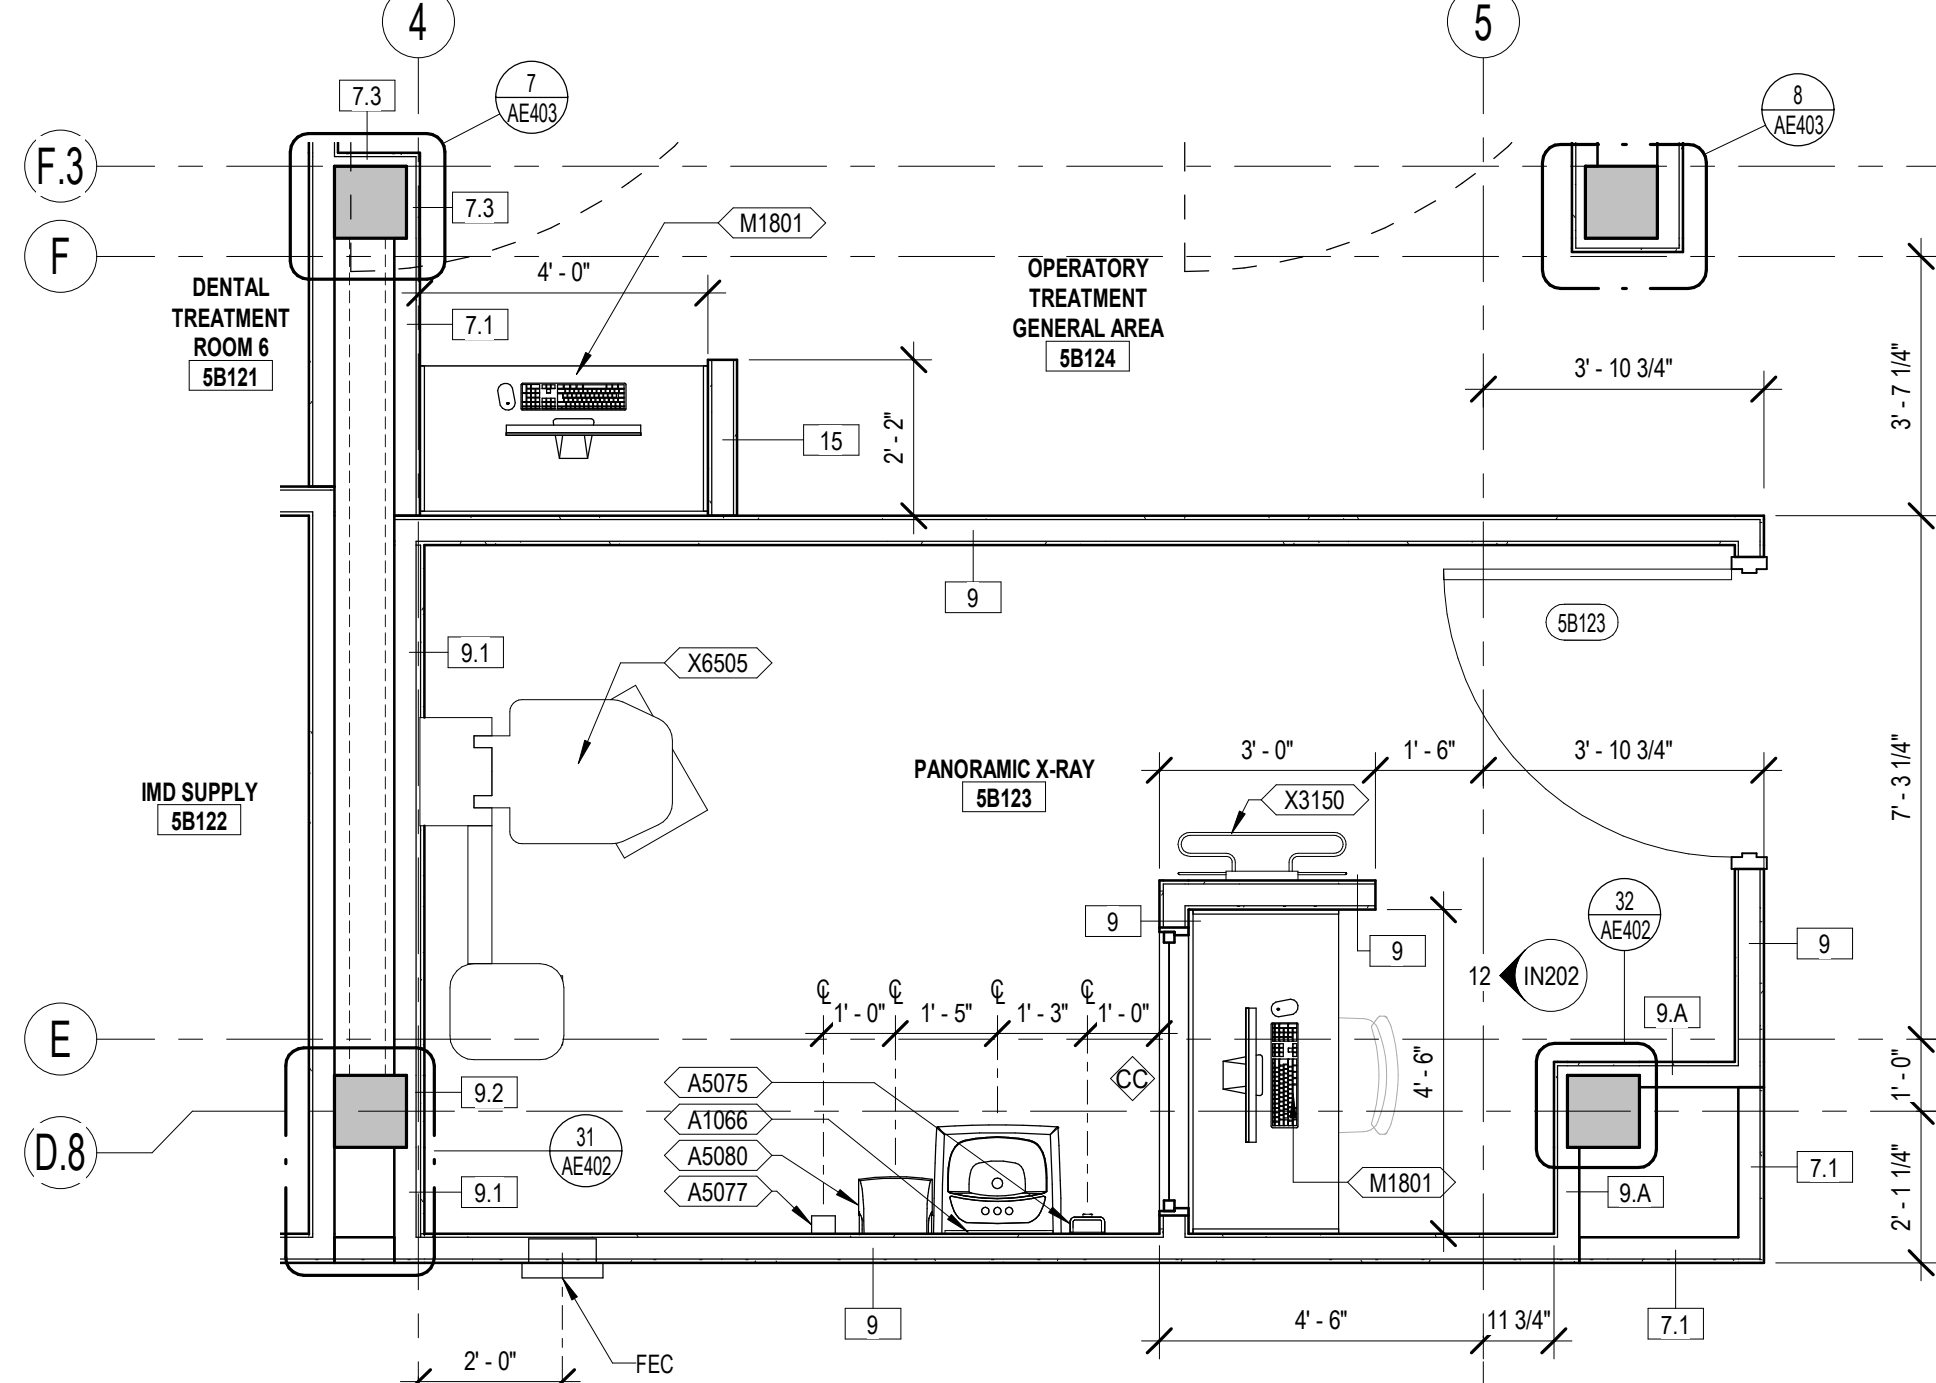


2 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

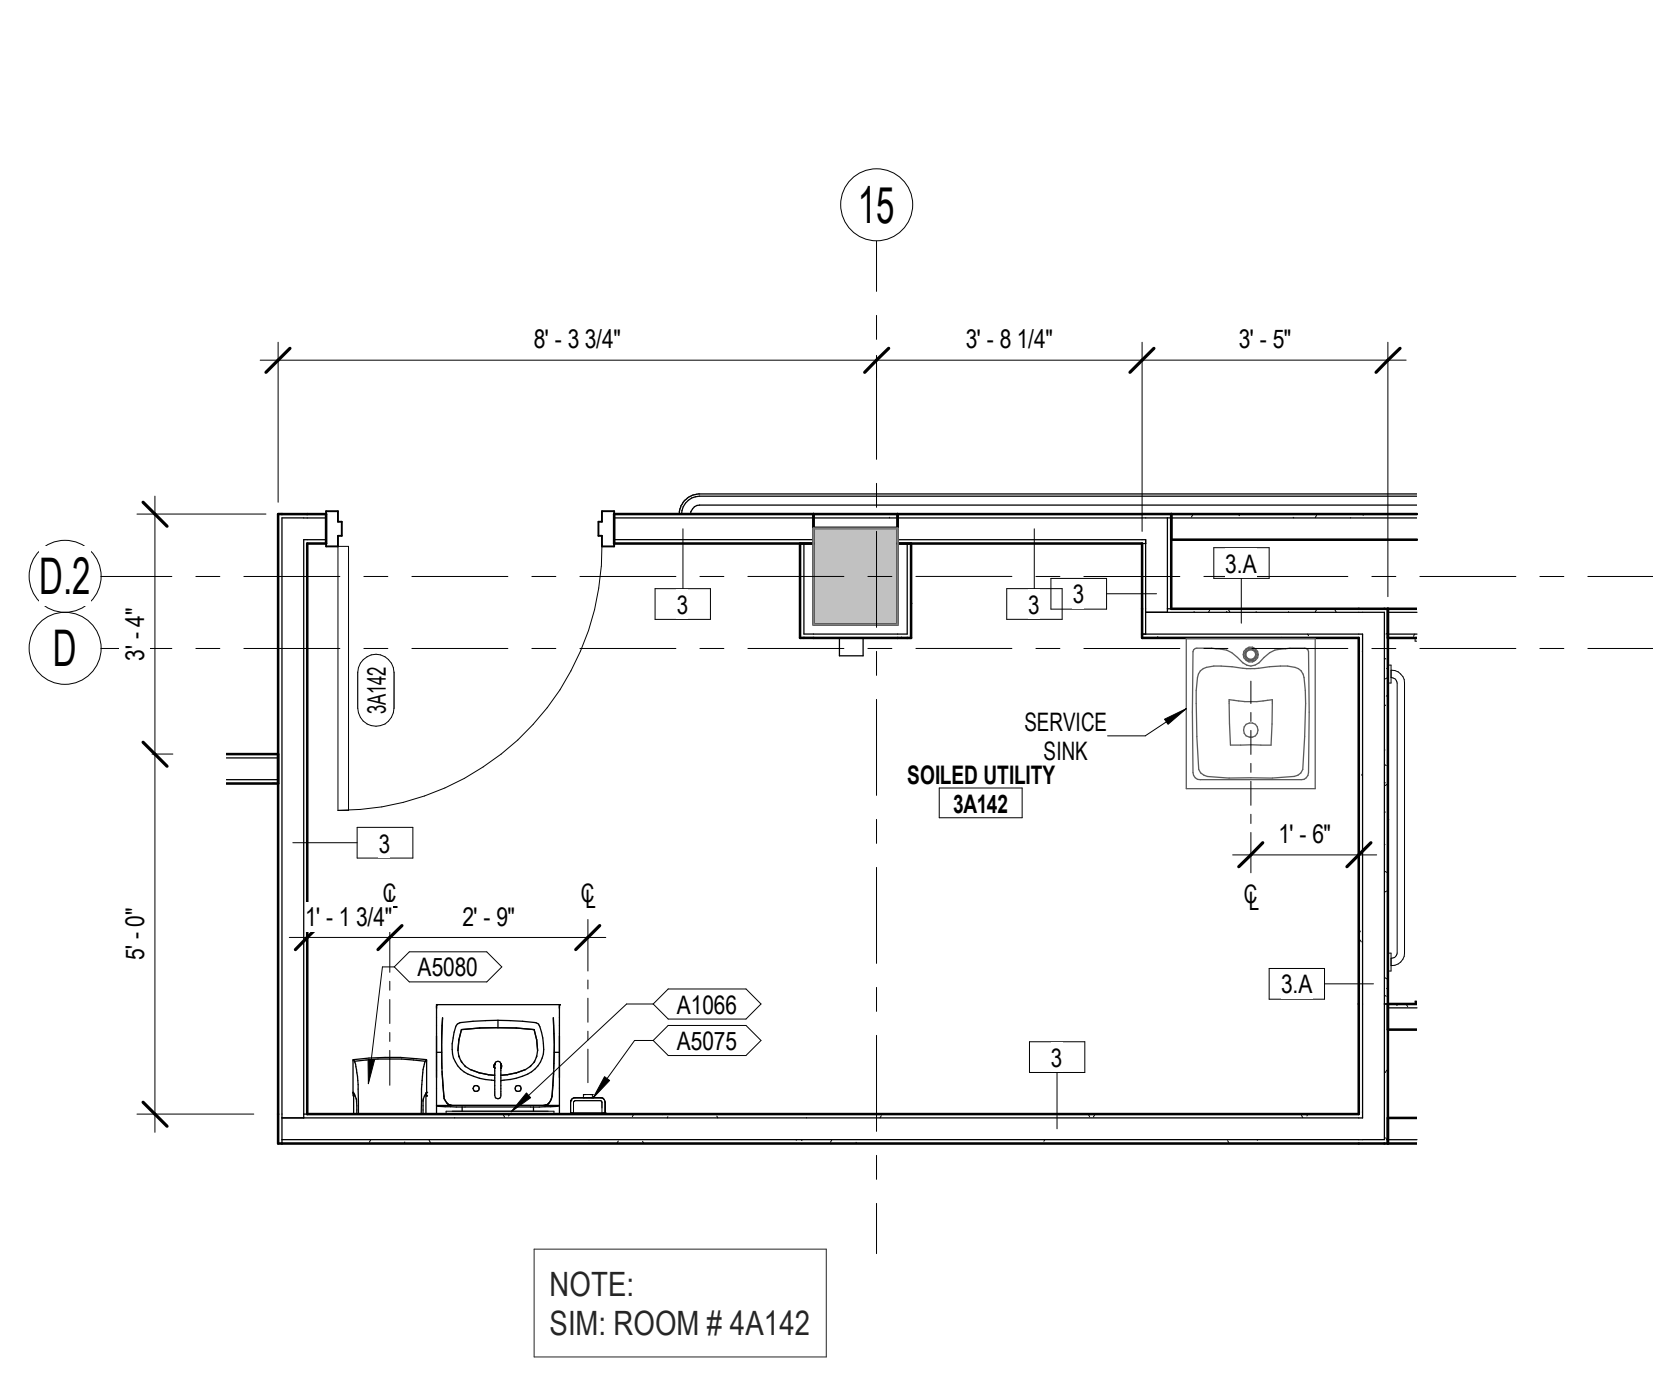


3 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

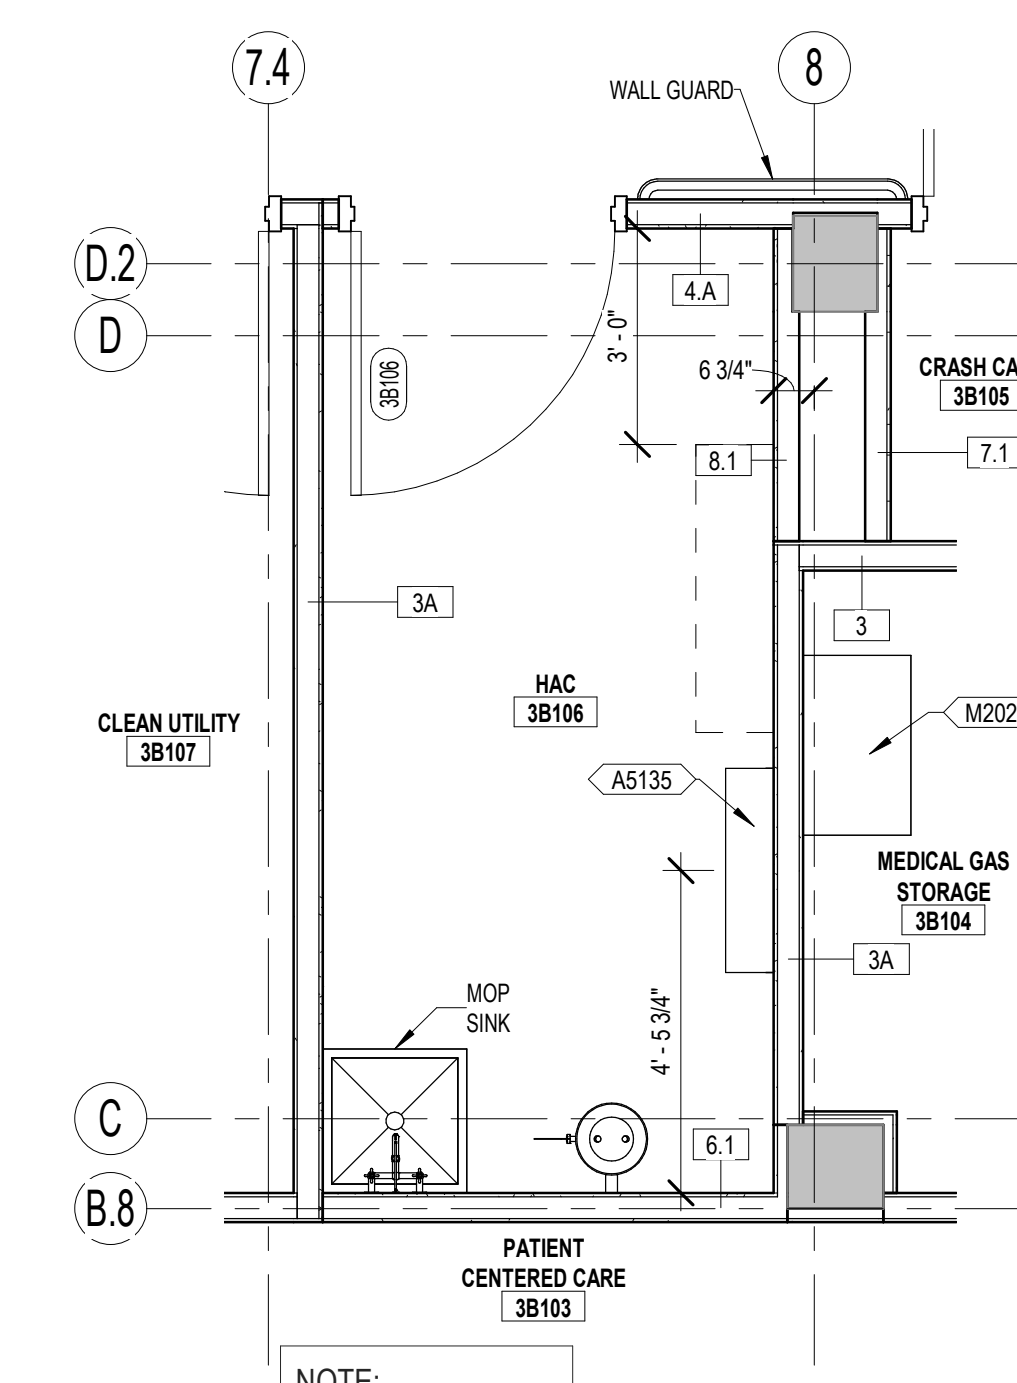


4 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

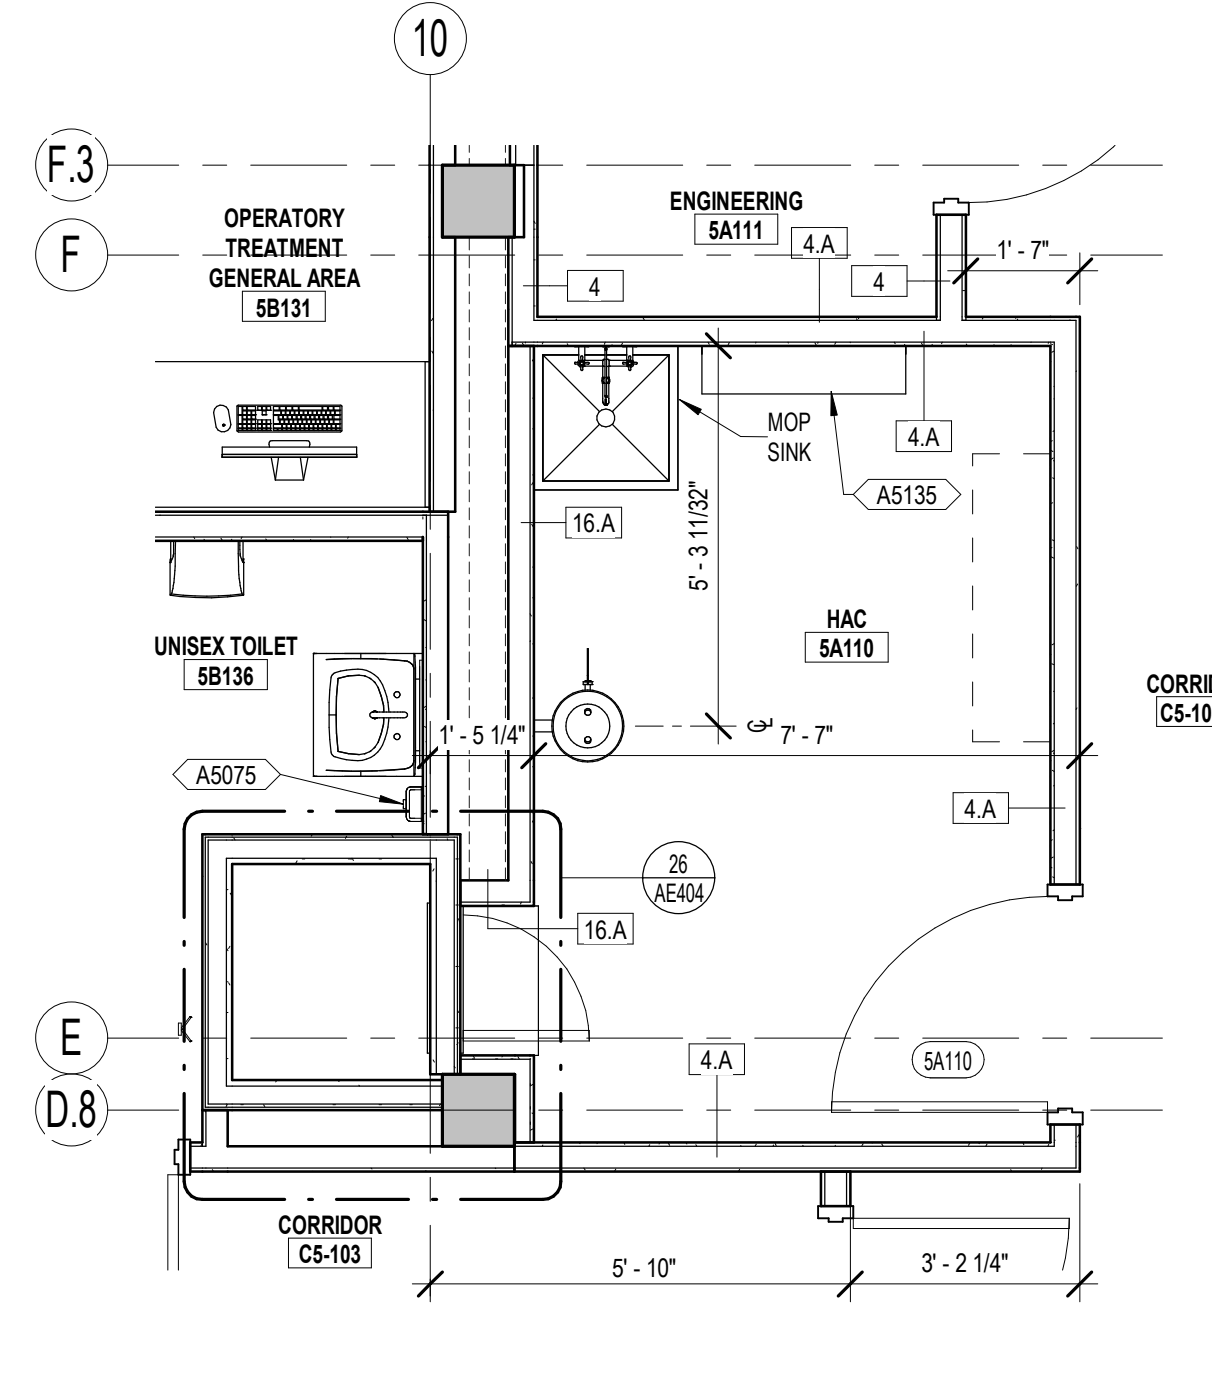


5 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

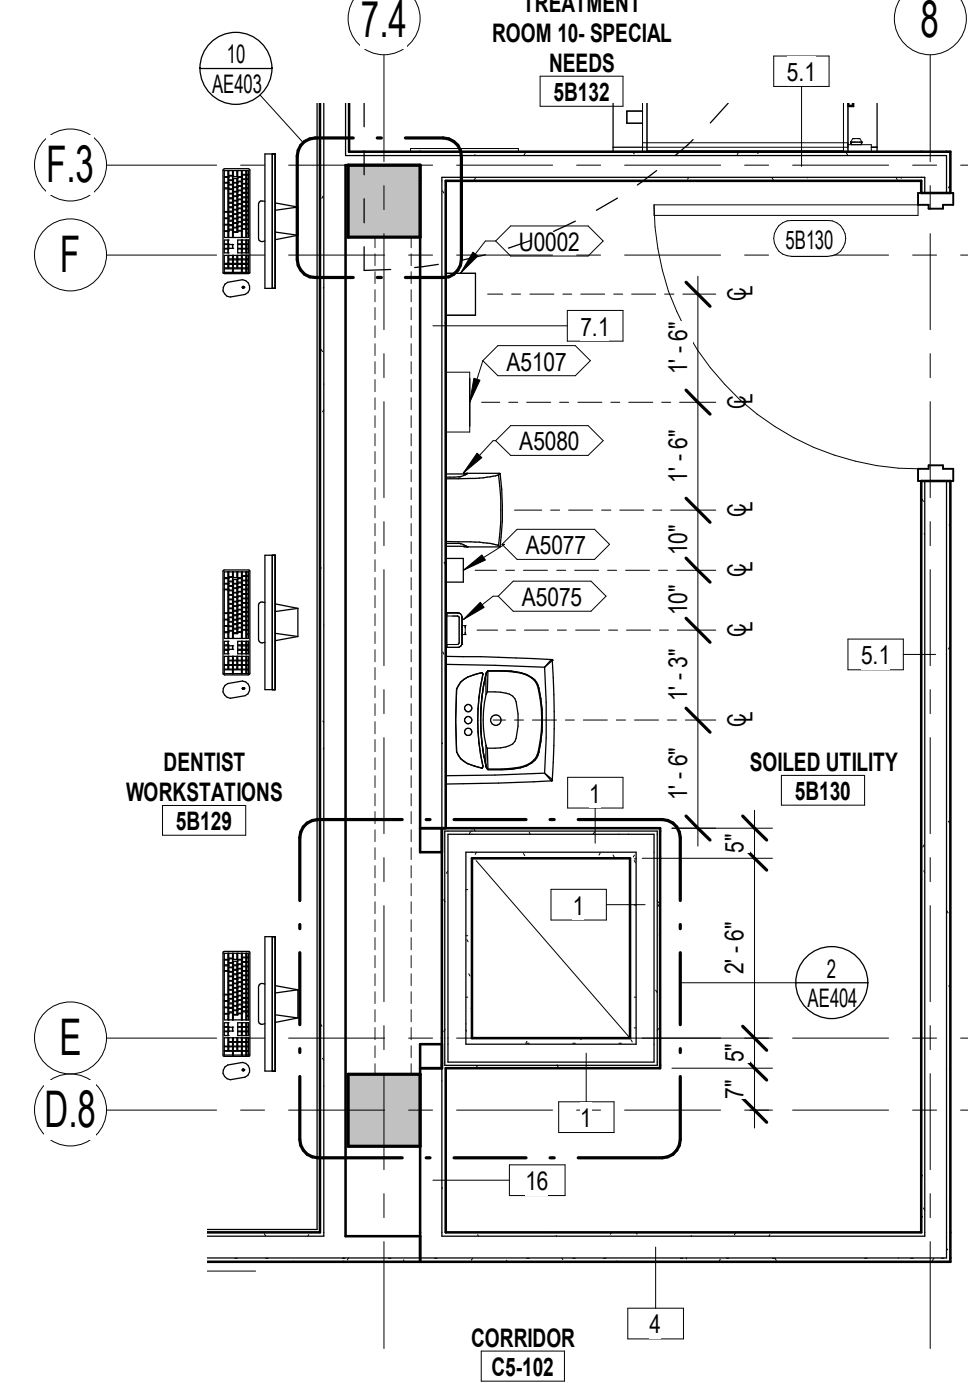


6 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

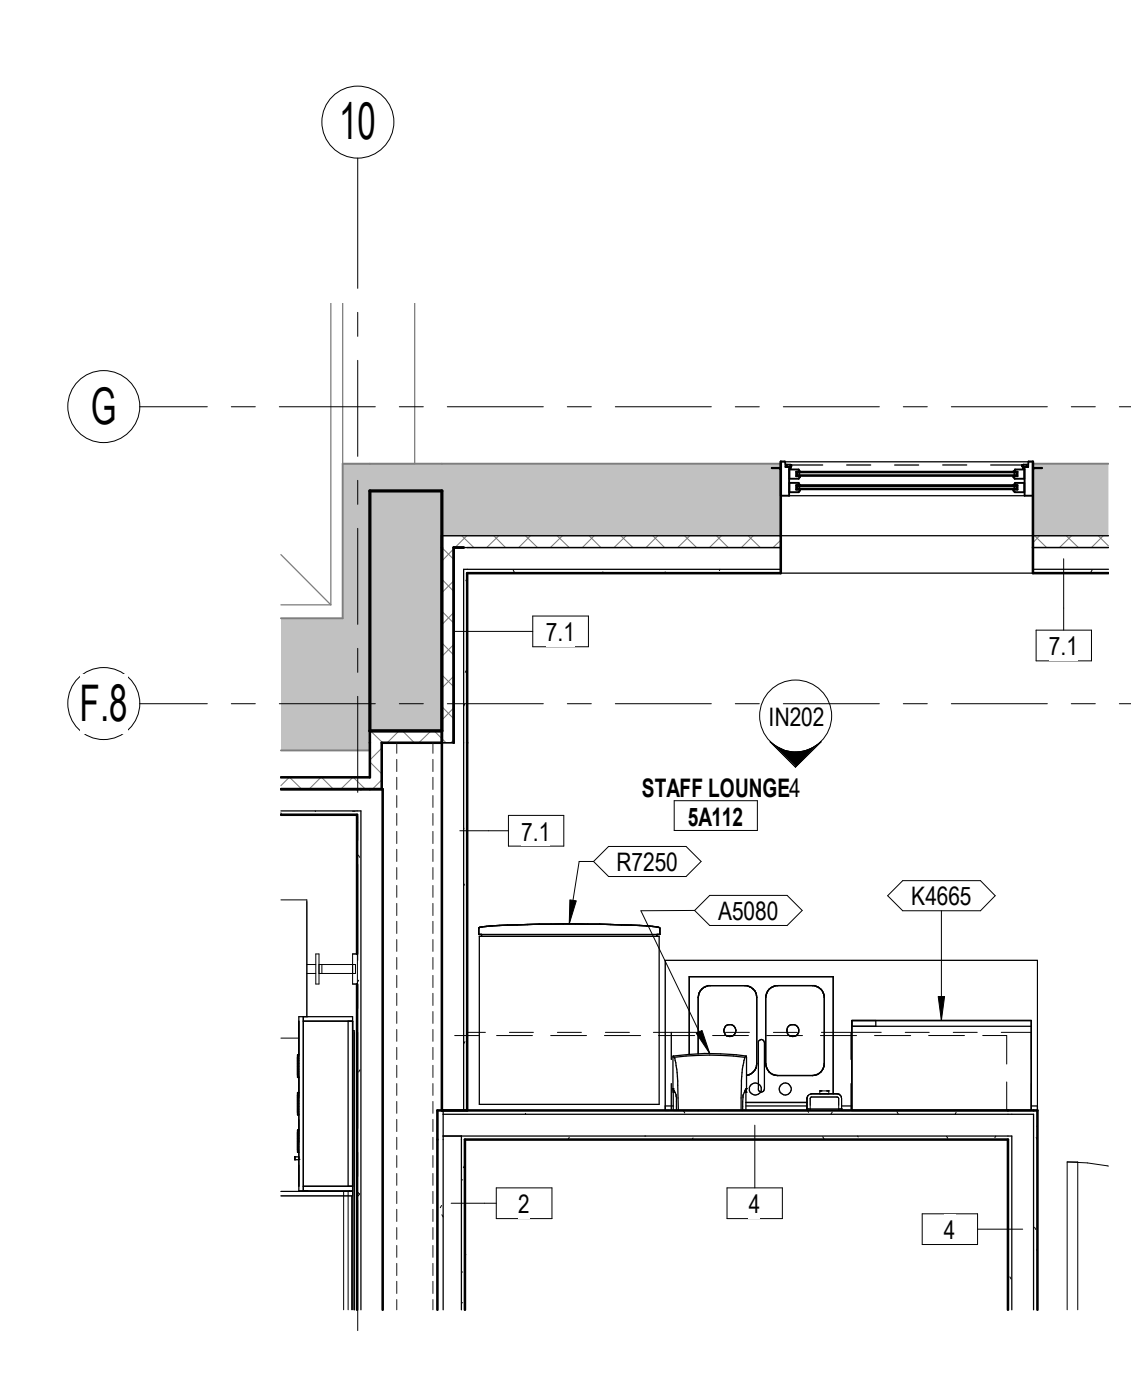


7 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

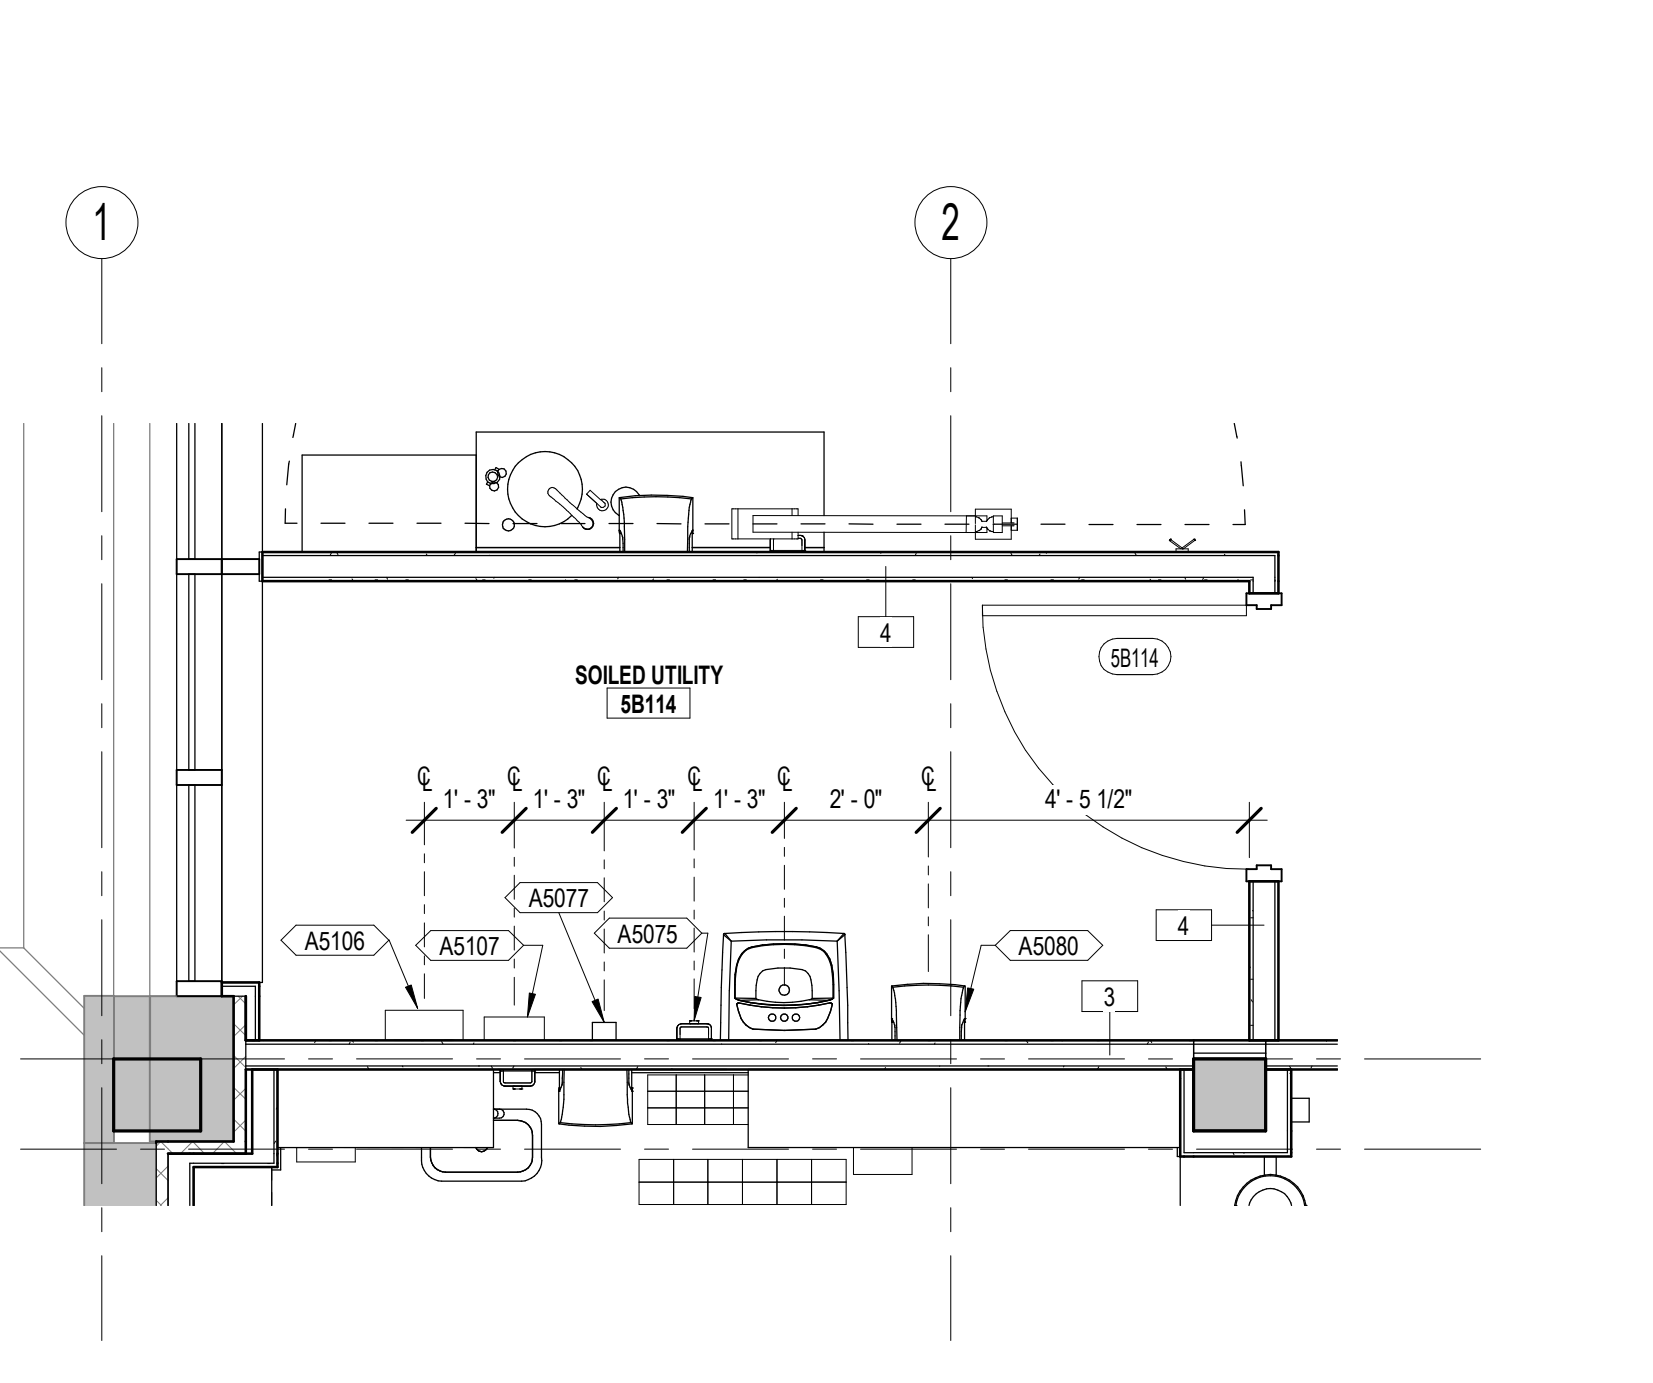


8 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

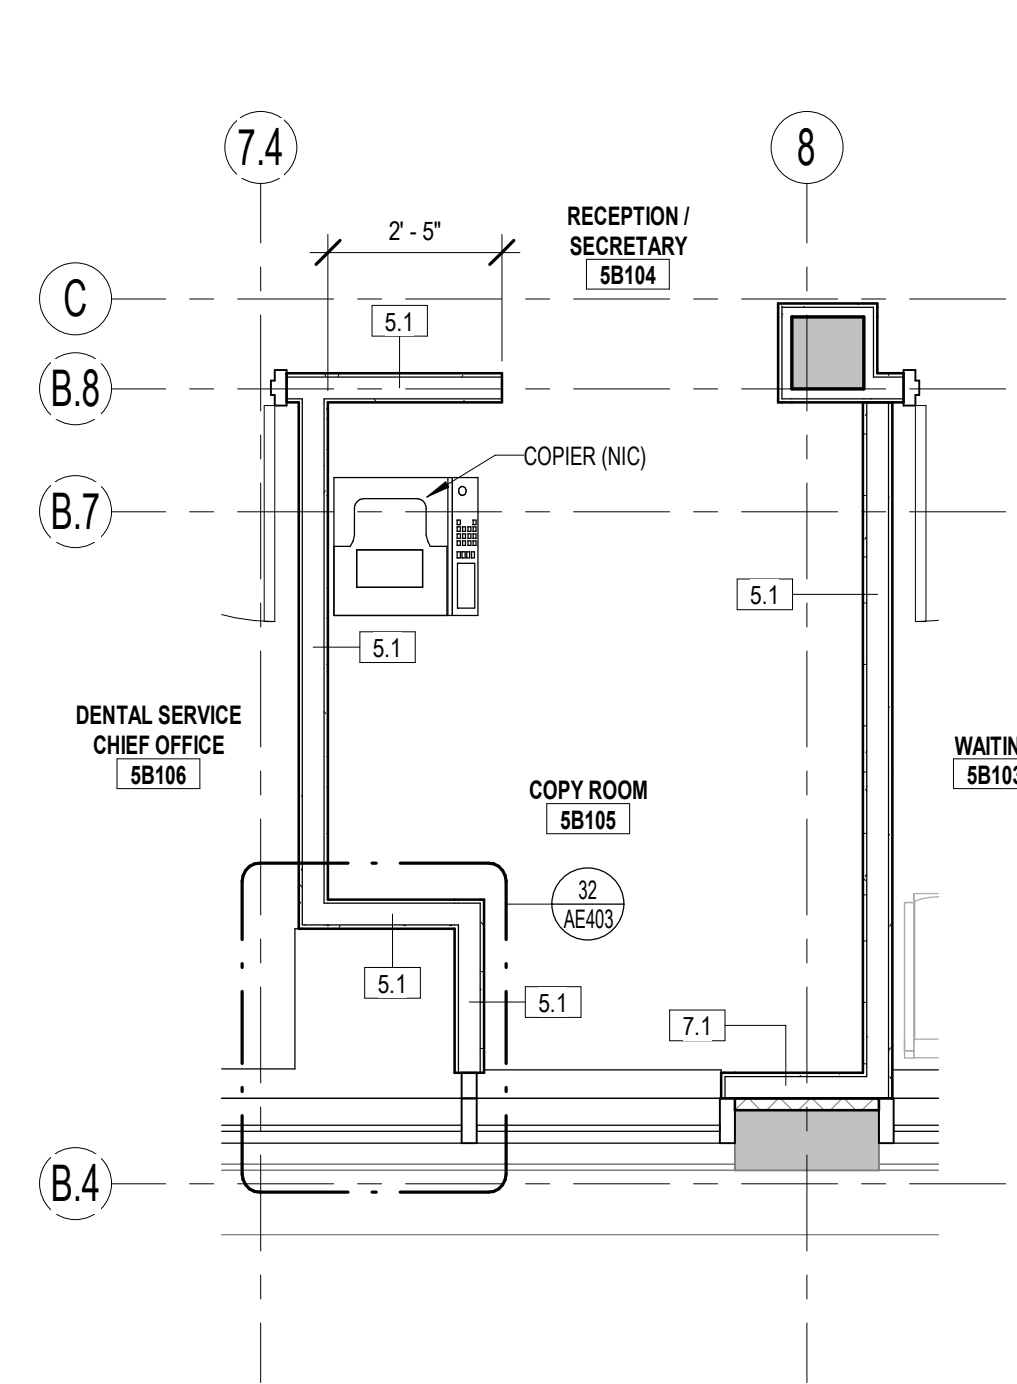

9 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

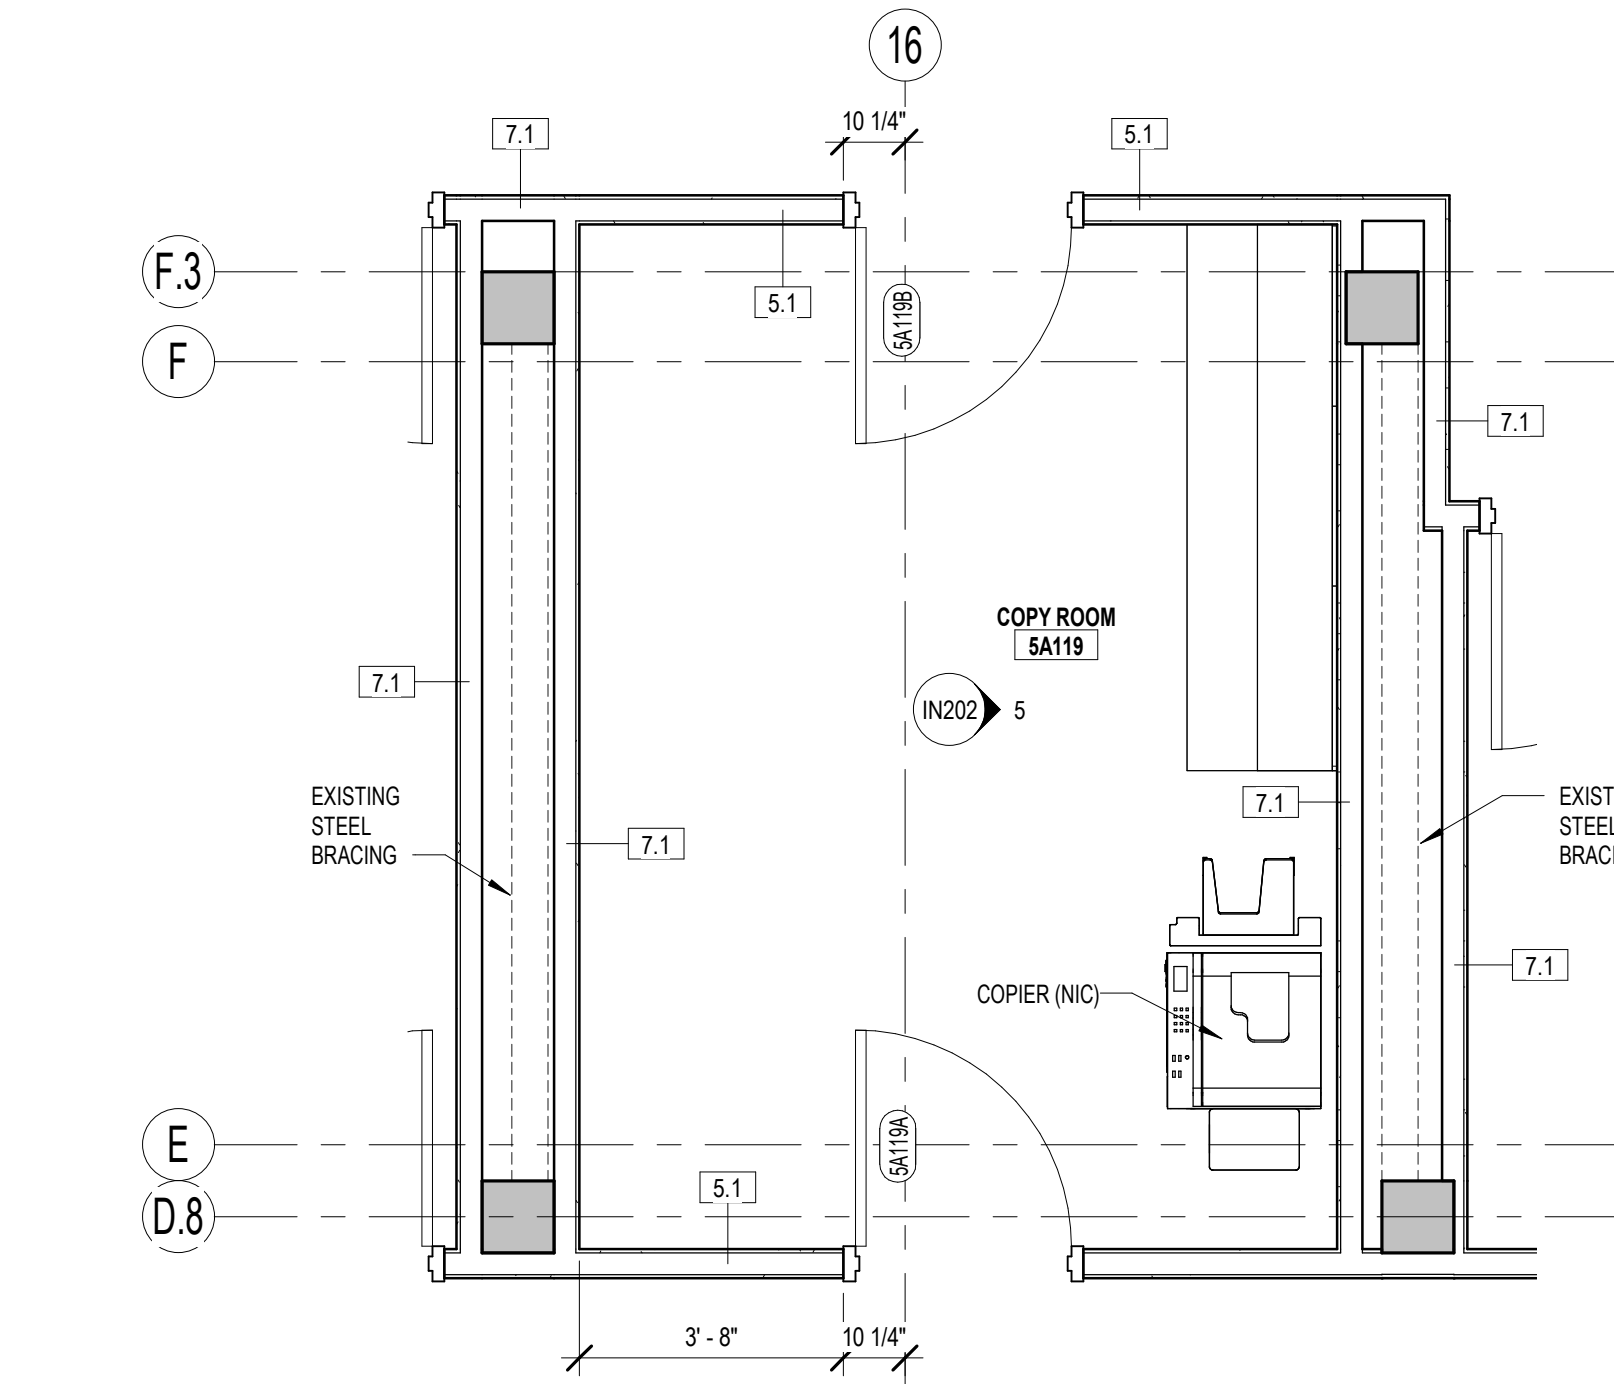

10 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

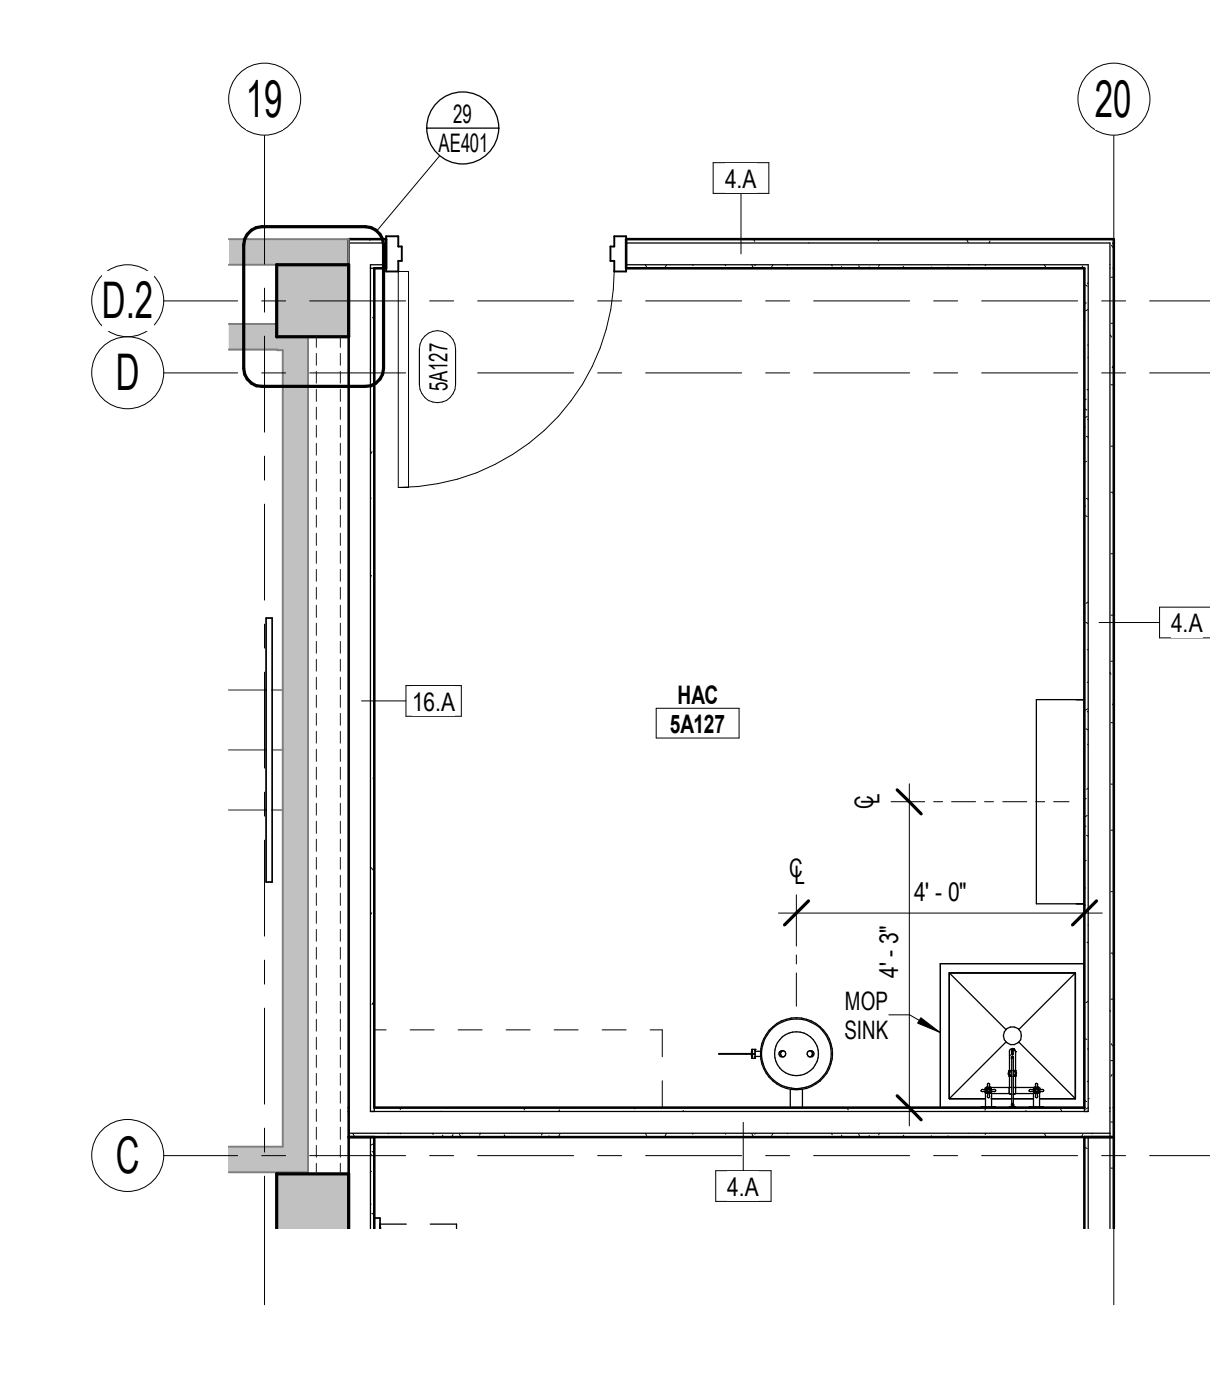

11 ENLARGED FLOOR PLAN
AE125 3/8" = 1'-0"

EQUIPMENT SCHEDULE - SHEET AE125		
JSN	DESCRIPTION	ACTIVATED BY
A1066	MIRROR, FLOAT GLASS, WITH SS FRAME, 18 X 36	CC
A5075	DISPENSER, HAND SOAP	VV
A5077	HAND SANITIZER DISPENSER	VV
A5080	DISPENSER, PAPER TOWEL	VV
A5106	WASTE DISPOSAL UNIT, SHARPS	VV
A5107	GLOVE DISPENSER RACK	VV
A5135	SHELF, UTILITY W/MP/BROOM HOLDERS, SS, SURFACE MOUNTED	CC
K4665	OVEN, MICROWAVE	VV
M1801	COMPUTER AND MONITOR	VV
M2025	RACK, STORAGE CYLINDER, GAS	VV
M3150A	AUTOMATED STORAGE/DISPENSING UNIT(OMNICELL) - 1 CELL	VV
R6200	REFRIGERATOR, UNDERCOUNTER, 5 CU. FT	VV
R7250	REFRIGERATOR/FREEZER, 20 CU. FT.	VV
U0002	PDI WIPE DISPENSER	VV
X3150	RACK, APRON & GLOVE, WALL MOUNT	VV
X6505	RADIOGRAPHIC UNIT, DENTAL PANOGRAPHIC	VV

EQUIPMENT ABBREVIATIONS	
CC:	CONTRACTOR FURNISHED & INSTALLED
VV:	VA FURNISHED & INSTALLED
VC:	VA FURNISHED & CONTRACTOR INSTALLED


RESTROOM ACCESSORY NOTES	
1.	SEE SHEET G101 FOR SHOWER RECEPTOR TYPES.
2.	MOUNT WASTE RECEPTACLE TO MEET ABAS. MOUNT HIGHEST OPERABLE PART OF CONTROLS, DISPENSERS, RECEPTACLES AND OTHER OPERABLE EQUIPMENT BETWEEN 15'-48" ABOVE FINISH FLOOR.
3.	ATTACH MIRROR PER MANUFACTURER STANDARD; CENTER MIRROR ON LAVATORY(S) BELOW.
4.	ROBE HOOKS (A5145) TO BE MOUNTED ON TOILET SIDE OF DOOR, 48" FROM ABOVE FINISH FLOOR TO CENTER.
5.	FIELD VERIFY MOUNTING HEIGHTS WITH RESIDENT ENGINEER BEFORE INSTALLATION.
6.	PROVIDE & INSTALL PRE-JOINED (PLASTIC COVER) INSULATION FOR ALL EXPOSED PIPING, MEETING ALL APPLICABLE ABA REQUIREMENTS.

RESTROOM ACCESSORY GENERAL NOTES	
A.	MOUNTING HEIGHTS REFERENCED ON SHEET G101. VERIFY ALL MOUNTING HEIGHTS WITH CODES AND MANUFACTURER RECOMMENDATIONS.
B.	ABA TOILET PARTITION DOOR MUST BE 34" MINIMUM CLEAR OPENING.
C.	WHERE DIMENSIONS ARE INDICATED ON PLAN AS "CLEAR," THE DIMENSIONS ARE TAKEN FROM FACE OF FINISHED WALL MATERIAL TO FACE OF FINISHED WALL MATERIAL.
D.	SEE SHEET Q104 FOR EQUIPMENT SCHEDULE.

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD
THOMAS OLESAC, ARCHITECT
MS Lic # 5505
1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

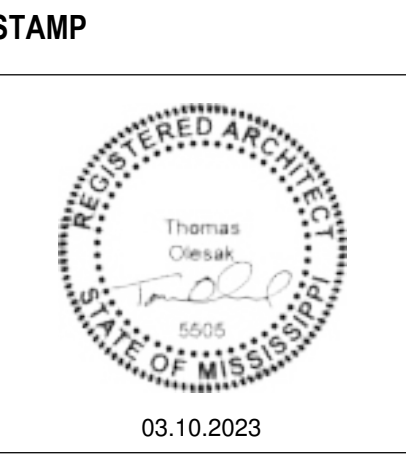


Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
ENLARGED FLOOR PLANS
Approved:

Phase
CONSTRUCTION DOCUMENTS
FULLY SPRINKLERED

Project Title RENOVATE BUILDING 1	Project Number 520-317X
Location BILOXI, MISSISSIPPI	Building Number 1
Issue Date 03/10/2023	Drawing Number AE125
Checked LA	Dwg. 81 of 238

BID DOCUMENTS

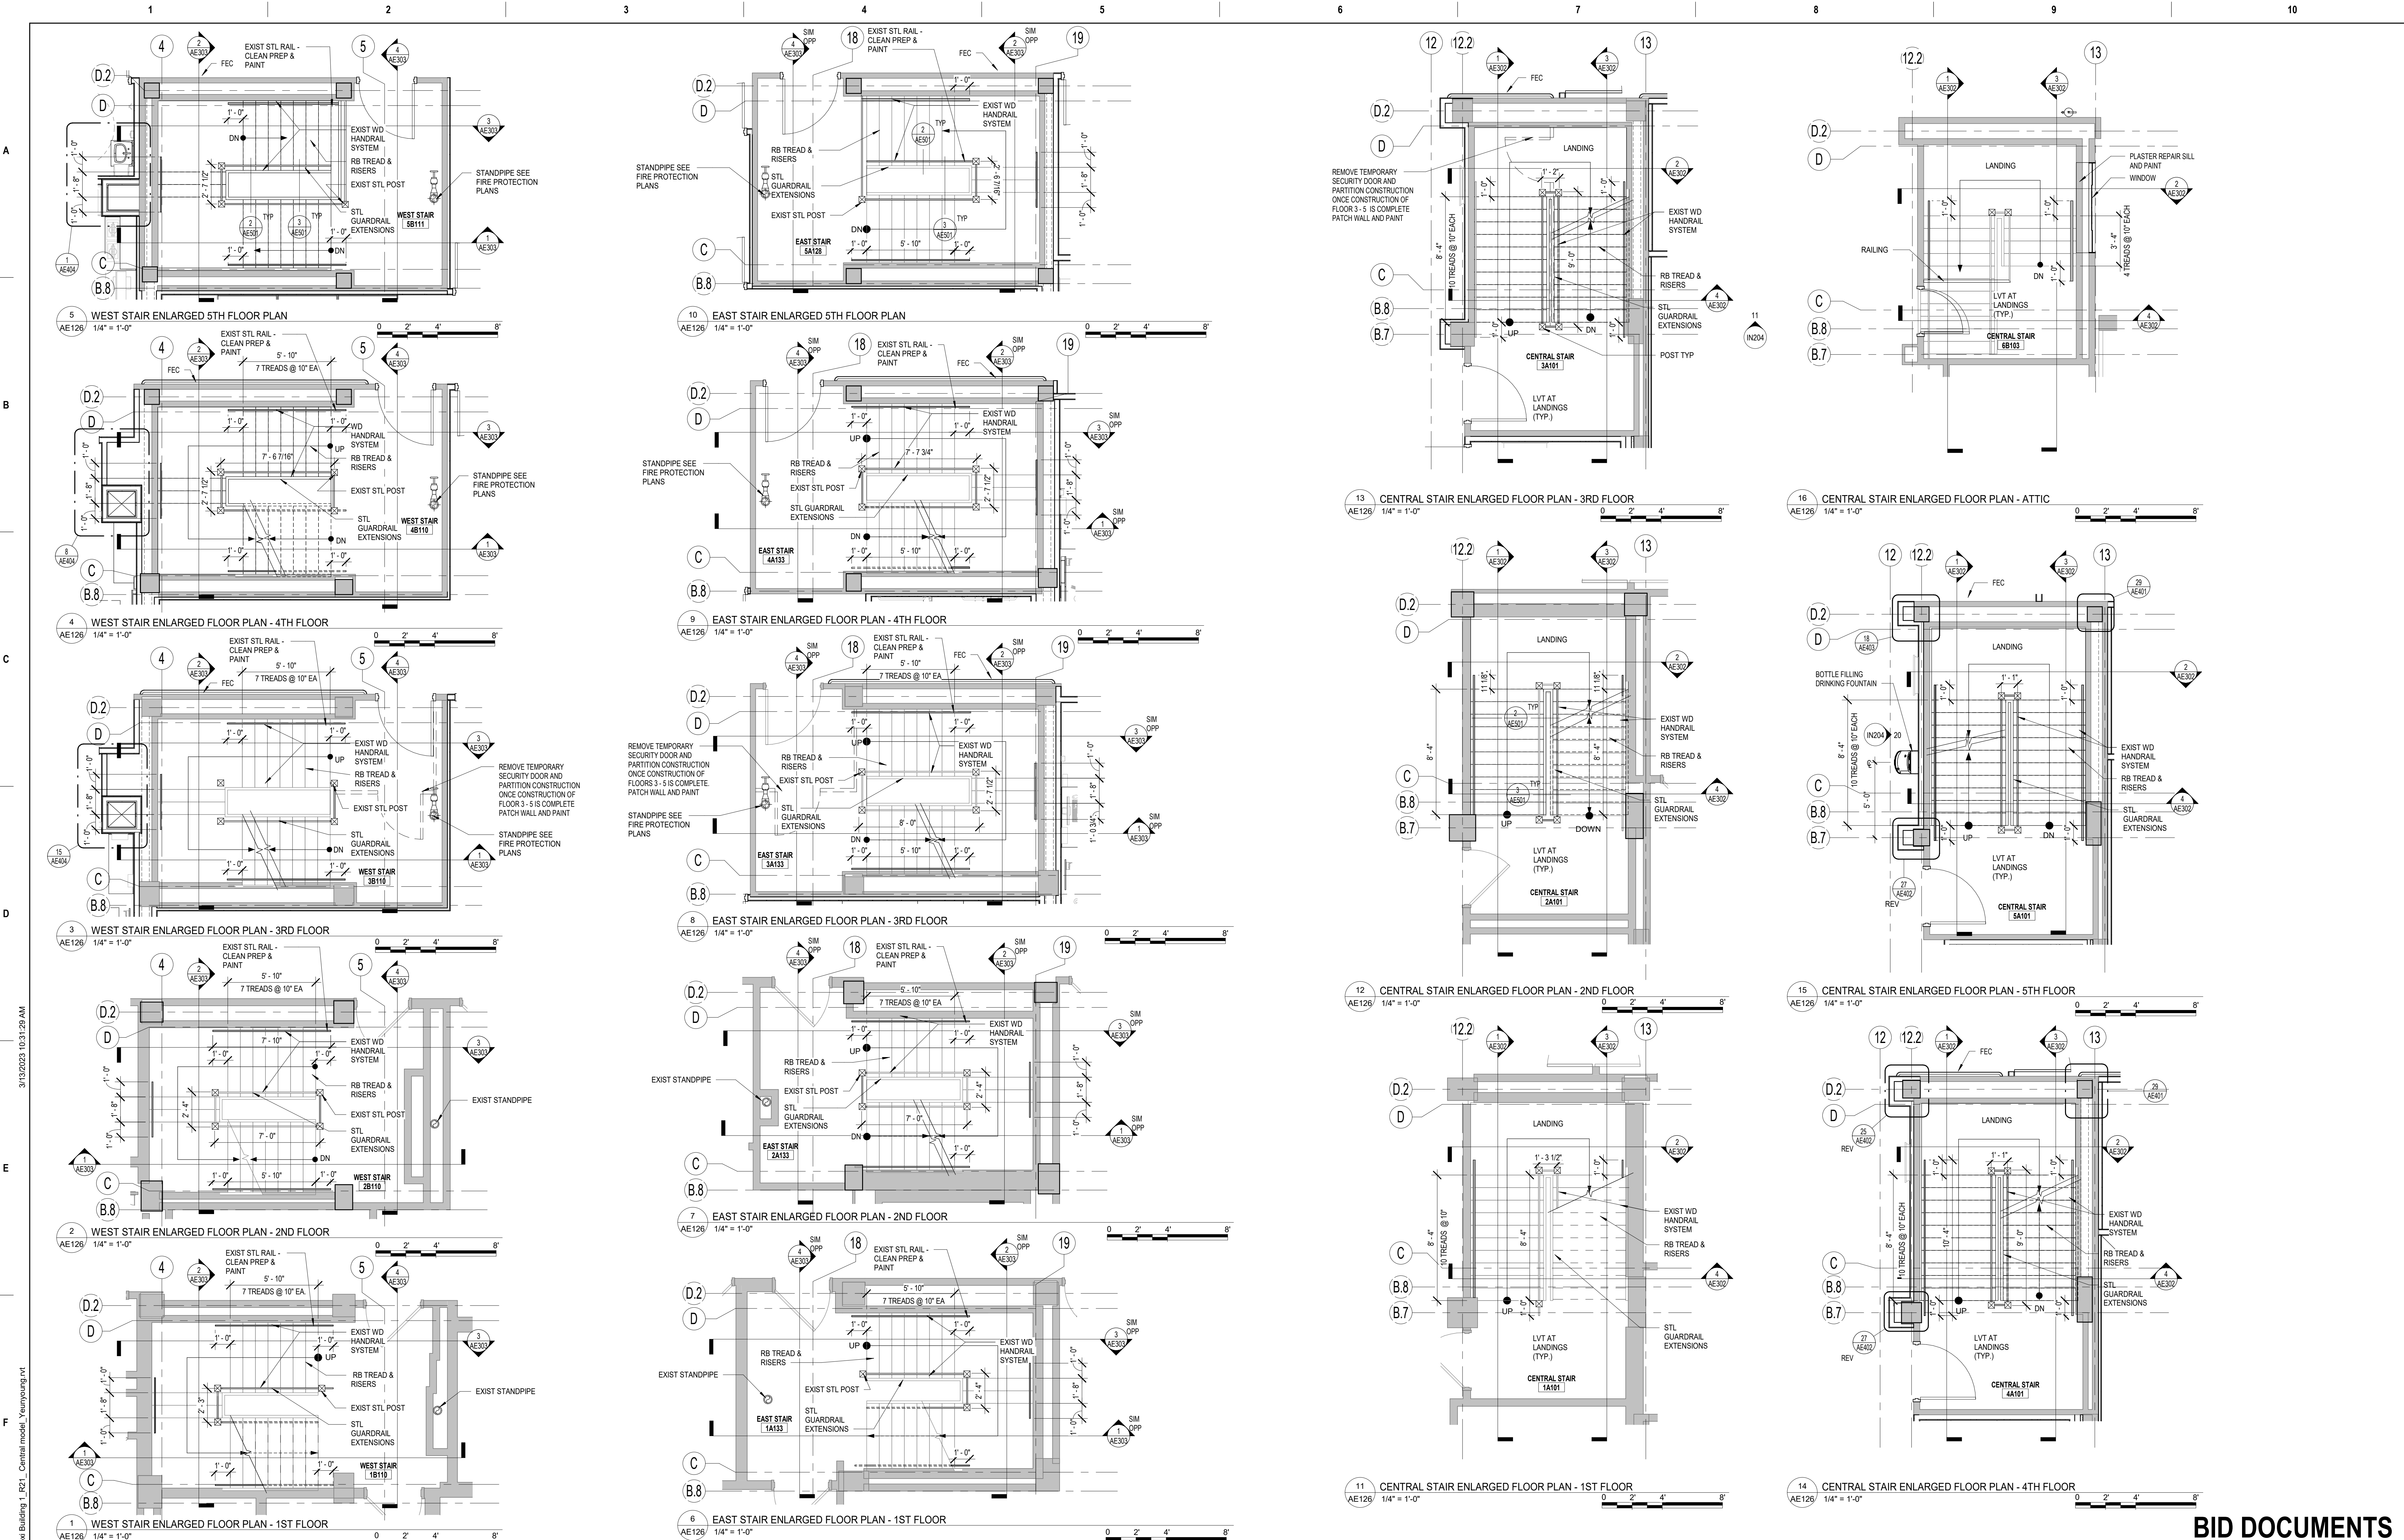

CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title		Phase		Project Title		Project Number	
		THOMAS OLESAK, ARCHITECT				U.S. Department of Veterans Affairs		ENLARGED STAIR FLOOR PLANS		CONSTRUCTION DOCUMENTS		RENOVATE BUILDING 1		520-317X	
		MS Lic # 5505						Approved:				Location		Building Number	
		1050 HOYT AVE WEST ST PAUL, MN 55117										BILOXI, MISSISSIPPI		1	
		952-451-0460										Issue Date		Drawing Number	
												03/10/2023		AE126	
												Checked		Dwg. 82 of 238	
												LA			
												Drawn			
												CD,PC			


BID DOCUMENTS

1 DENTAL TREATMENT ROOM 4 & 5
AE127 1/4" = 1'-0"


2 ENLARGED PLAN - NURSE STATION 3A109
AE127 1/4" = 1'-0" 0 2' 4'

Project Title RENOVATE BUILDING 1			Project Number 520-317X		
			Building Number 1		
Location BILOXI, MISSISSIPPI			Drawing Number AE127		
Issue Date 03/10/2023	Checked Checker	Drawn Author	Dwg. 83 of 238		

BID DOCUMENTS

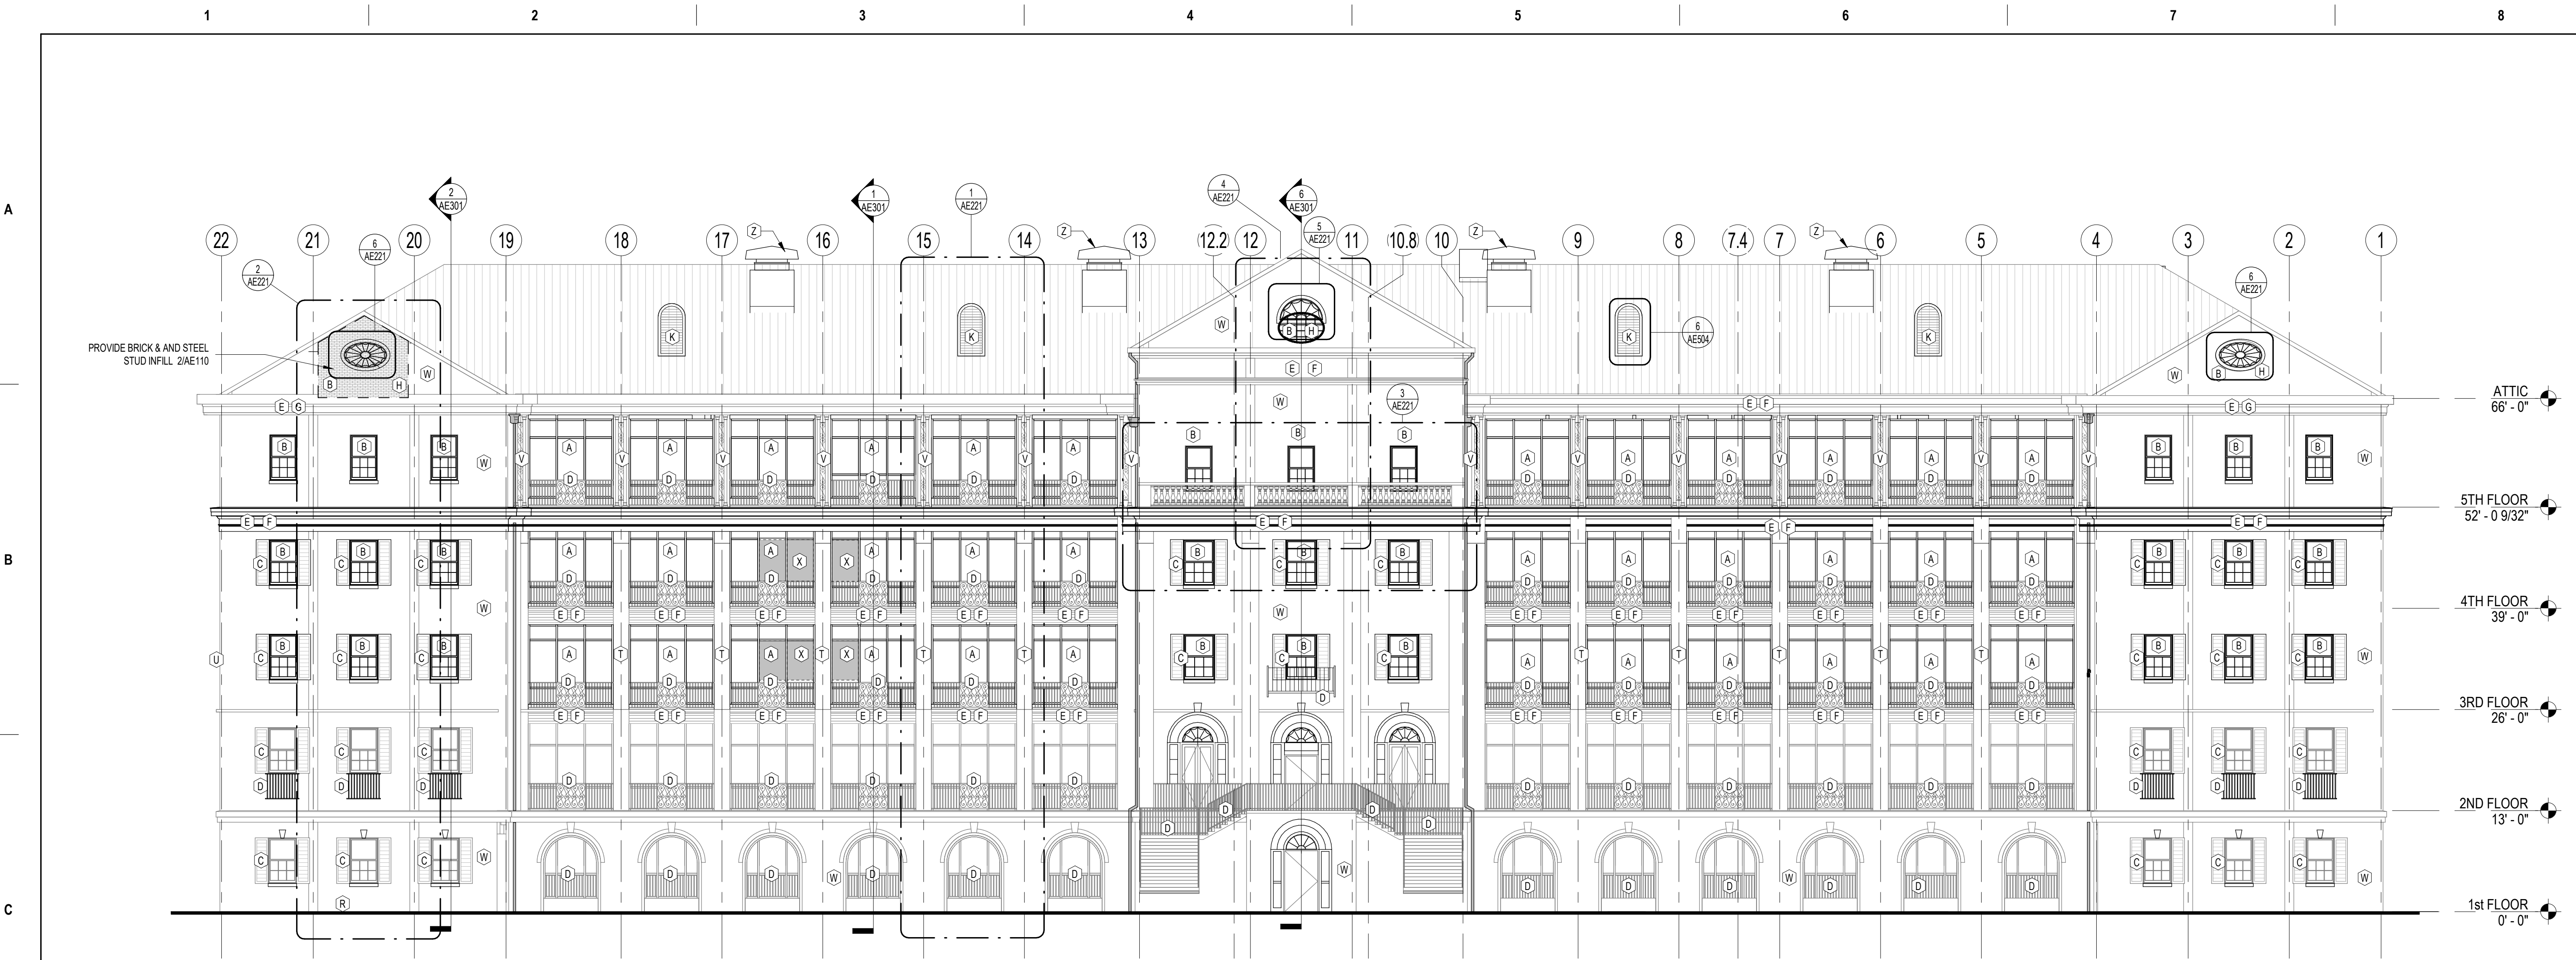

1 NORTH EXTERIOR ELEVATION
3/32" = 1'-0"

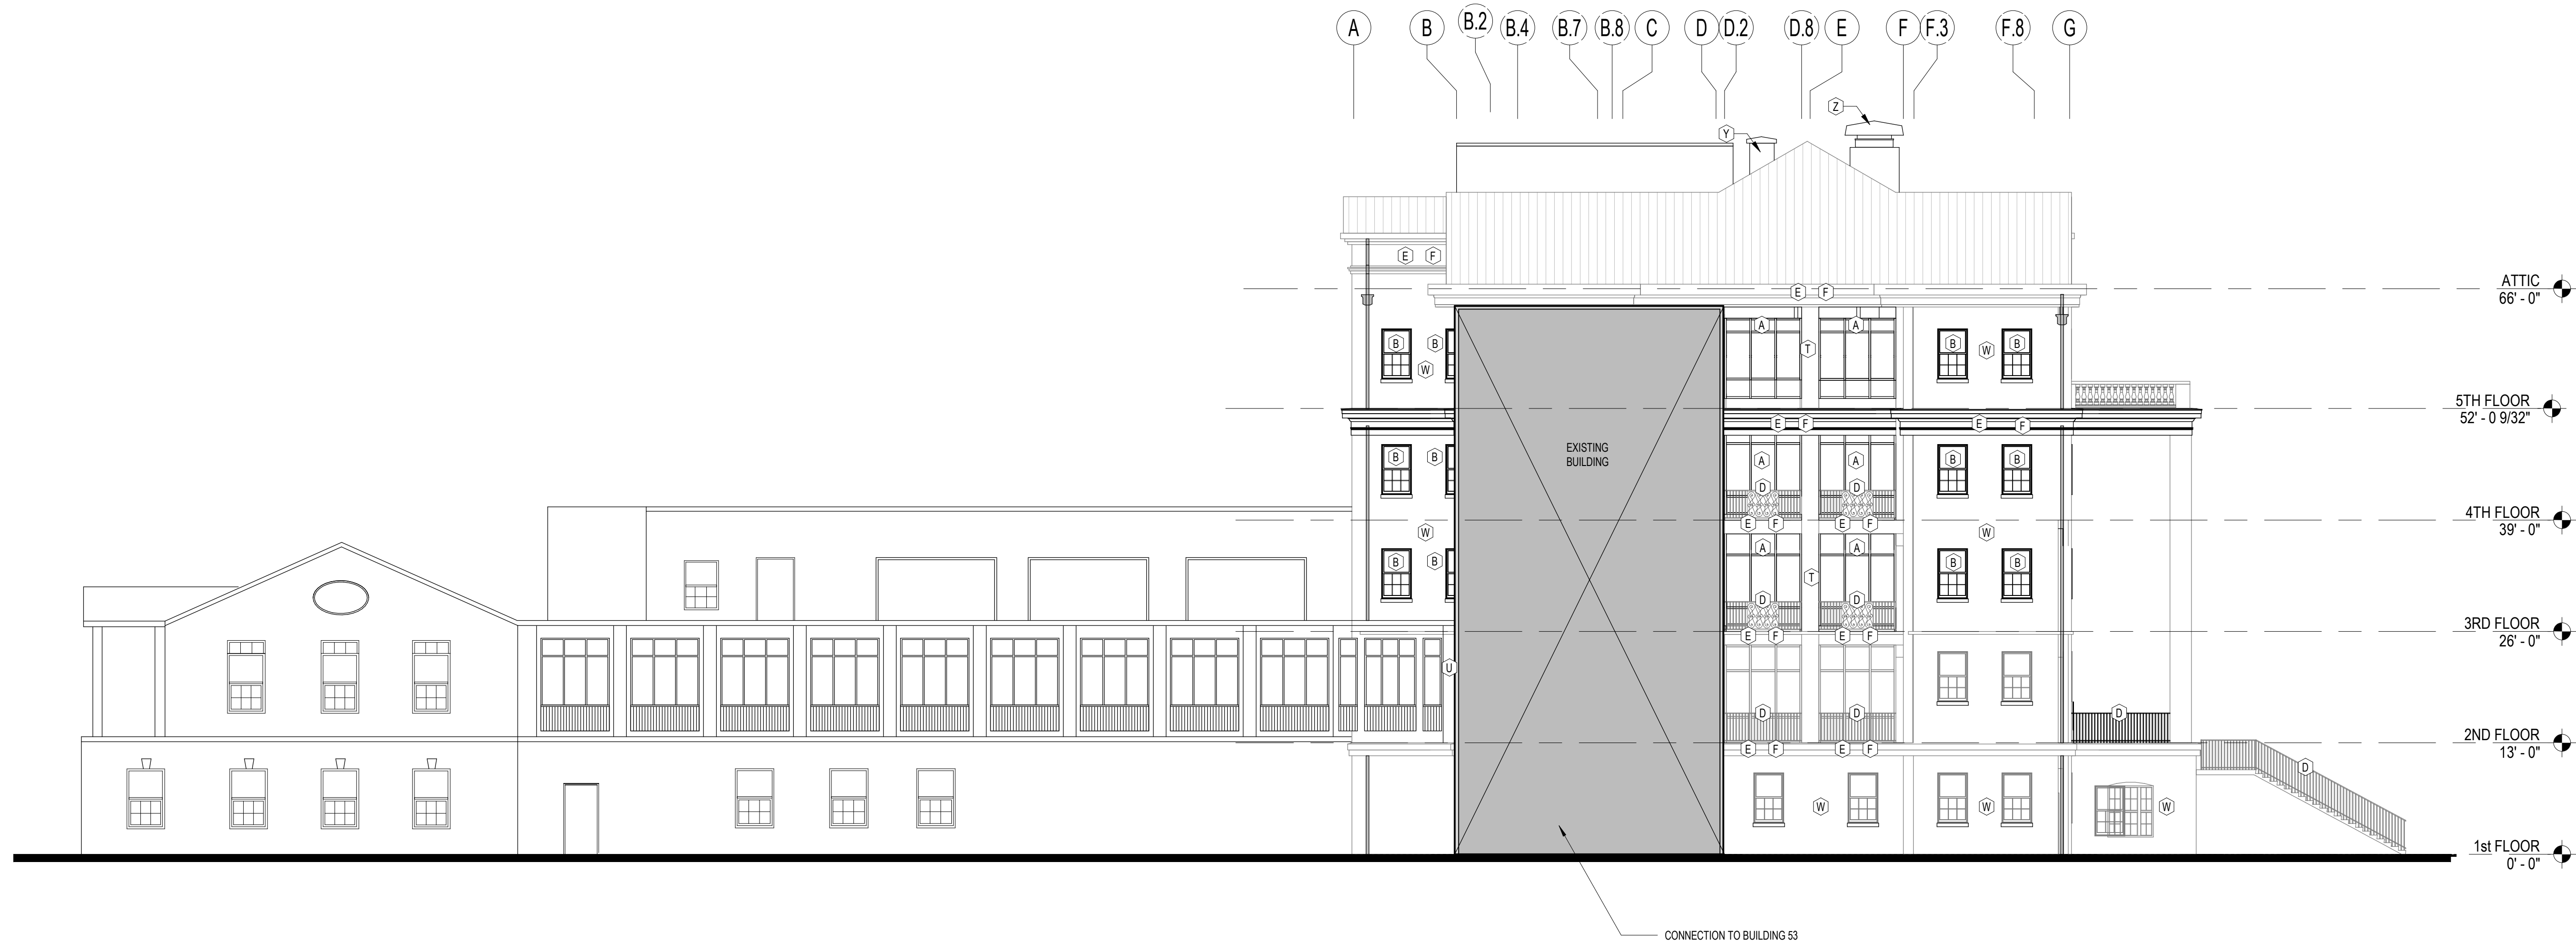

2 EAST EXTERIOR ELEVATION
3/32" = 1'-0"

EXTERIOR ELEVATIONS GENERAL NOTES

- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT & RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THE AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDING AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE ARCHITECT & RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- COORDINATE WORK WITH OTHER PHASES
- COORDINATE SITE LAYOUT / ACCESS / WORK AREAS / LAYDOWN AREAS / PHASING WITH RESIDENT ENGINEER
- SEE SHEETS S402 AND S403 FOR CURTAINWALL / WINDOW OPENING TYPES AND ASSOCIATED WORK
- SEE SHEET ADT01 - ADT05 FOR PHOTOGRAPHS
- ALL MASONRY / STONE IS TO HAVE A WATER RESISTANCE COATING. MORTAR JOINTS ARE TO BE RETOOLLED, AS REQUIRED.
- ALL EIFS SYSTEM TO HAVE WATERPROOF COATING OVER INSULATION BOARD / FOAM SHAPE, BASE COAT AND PRIMER, WHERE REQUIRED
- BACKWRAP EIFS FOAM INSULATION BOARDS / SHAPE PER MANUFACTURER'S RECOMMENDATIONS
- ALL DIFFERING MATERIAL JOINTS TO HAVE BACKER ROD AND SEALANT INSTALLED
- INSTALL NEW GUTTERS AND DOWNSPOUTS. SEE ROOF PLAN ON SHEET AE105 FOR ADDITIONAL WORK NOT SHOWN. PROVIDE CONCRETE SPLASH BLOCKS AT ALL DOWNSPOUT LOCATIONS THAT SPLASH AT GRADE
- REMOVE ALL SIGNAGE IN AREAS OF WORK. PREDRILL HOLES FOR FASTENERS AND FILL WITH SEALANT PRIOR TO INSTALL FASTENER.
- REINSTALL ALL ELECTRICAL, COMMUNICATIONS, SECURITY, ACCESS CONTROL, IN EXISTING LOCATIONS. PROVIDE WATER/TIGHTNESS AT PENETRATIONS
- COLORS (SUBMIT WATERPROOF COATING, PAINT AND METAL COLORS TO BE APPROVED IN SHOP DRAWINGS PHASE BY ARCHITECT OR RESIDENT ENGINEER - COLORS TO MATCH EXISTING CAMPUS COLOR SCHEME):
 - BRICK (BELOW SECOND FLOOR STONE BANDING TO GRADE 0): LIGHT TAN
 - BRICK & NEW EIFS GABLE (ABOVE SECOND FLOOR STONE BANDING TO ROOF) MEDIUM TAN
 - STONE BANDING, SILL, KEYSTONES, ETC.: GRAY
 - EIFS (COLUMN, TRIM, FASCIA, CORNICE, ETC.): WHITE
 - STOREFRONT, WINDOW UNITS AND ASSOCIATED FLASHING: WHITE
 - RAILINGS: BLACK
 - ROOF AND ROOF FLASHINGS: COLONIAL RED (MATCH EXISTING)
 - ROOF GUTTERS COLONIAL RED, ROOF DOWNSPOUTS TO MATCH ADJACENT WALL COLOR

ELEVATION LEGEND

- EXISTING TO REMAIN
- - - - - TO BE REMOVED
- (N) KEYNOTE

EXTERIOR ELEVATION KEYNOTES

- (A) NEW ALUMINUM CURTAINWALL INCLUDING FASTENER, BLOCKING, FLASHING, SEALANTS. SEE DETAILS FOR ADDITIONAL INFORMATION. SEE PLANS FOR CURTAINWALL TYPES.
- (B) NEW ALUMINUM WINDOW INCLUDING FASTENERS, BLOCKING, FLASHING, SEALANTS. SEE DETAILS FOR ADDITIONAL INFORMATION. SEE PLANS FOR WINDOW TYPES.
- (C) REINSTALL EXISTING SHUTTERS. PREDRILL HOLES FOR FASTENERS, CLEAN, AND FILL WITH SEALANT PRIOR TO INSTALLING FASTENERS. TYPICAL FOR NORTH ELEVATION.
- (D) REINSTALL REFINISHED RAILINGS. FILL ANY SOCKETS IN STONE WITH EPOXY. REMOVE BOTTOM OF POST IF APPLICABLE AND PROVIDE L-BRACKET TO FASTEN RAIL TO ADJACENT COLUMN.
- (E) INSTALL SILICONE ELASTOMERIC COATING OVER EIFS PILASTERS AND FASCIA. PROVIDE SUPPORTING LIGHT GAGE FRAMING, TRTD WOOD BLOCKING AND FLASHING.
- (F) INSTALL EIFS APPLIED CORNICES, TRIM AND PREFINISHED MITL FLASHING.
- (G) INSTALL EIFS ASSEMBLY. SEE DETAILS FOR EXTENT. ADJUST EXISTING THRU-WALL FLASHING TO COORDINATE WITH NEW WORK.
- (H) INSTALL EIFS APPLIED WINDOW TRIM. SEE WINDOW TYPES FOR ADDITIONAL INFORMATION.
- (J) PAINT EXISTING GUARD RAIL SYSTEM.
- (K) NEW LOUVER AND PREFINISHED MITL ON DORMERS. SEE ROOF PLAN - COORDINATE WITH MECH.
- (L) REINSTALL ACCESS CONTROL SYSTEM. PREDRILL HOLES FOR FASTENERS AND FILL WITH SEALANT TO INSTALLING FASTENERS.
- (M) REINSTALL LIGHT FIXTURE. PRE-DRILL HOLES FOR FASTENERS AND FILL WITH SEALANT PRIOR TO INSTALLING FASTENERS. PROVIDE GASKETS AT CONNECTION TO JUNCTION BOX.
- (N) REINSTALL SECURITY/COMMUNICATIONS FIXTURE FOR REINSTALLATION. PREDRILL HOLES FOR FASTENERS AND FILL WITH SEALANT PRIOR TO INSTALLING FASTENERS. PROVIDE GASKETS AT CONNECTION TO JUNCTION BOX. SEAL ALL HOLES IN MASONRY.
- (P) NOT USED.
- (Q) INSTALL NEW BACKER ROD AND SEALANT ALL AROUND EXISTING LOUVER.
- (R) INSTALL APPLIED GRATE OVER EXISTING FOUNDATION VENT HOLES. RECONNECT UTILITIES AS REQUIRED.
- (S) CLEAN EXISTING DOOR FINISHES. INSTALL NEW SEALANT AND BACKER RODS ALL AROUND. INSTALL GASKETS ALL AROUND.
- (T) INSTALL WATERPROOFING SILICONE ELASTOMERIC COATING OVER EIFS PILASTERS AND FASCIA. PROVIDE SUPPORTING LIGHT GAGE FRAMING, TRTD WOOD BLOCKING AND FLASHING.
- (U) INSTALL NEW ALUMINUM EXPANSION JOINT ASSEMBLY AND COVER AT CONNECTIONS BETWEEN BUILDING 1 AND BUILDING 53 AT NORTH AND SOUTH ELEVATIONS. REFER TO SPEC SECTION 07 95 13 (EXPANSION JOINT COVER ASSEMBLY) FOR ADDITIONAL INFORMATION.
- (V) REPAIR METAL COLUMNS AT 5TH FLOOR FACADE. SANDBLAST, REWELDED BASES, AND REPAINT AT ALL COLUMNS.
- (W) PROVIDE MORTAR JOINT REPAIR/REPLACEMENT TO EXISTING BRICK. PAINT EXISTING MASONRY/BRICK AND INSTALL SILICONE ELASTOMERIC COATING.
- (X) APPLY UV FILM AT INTERIOR OF THIS WINDOW. REFER TO SPEC SECTION 06 80 10 (GLAZING) FOR ADDITIONAL INFORMATION.
- (Y) EXISTING MECHANICAL EXHAUST.
- (Z) MECHANICAL EXHAUST.
- (Z.1) REBUILD OUTER WYTHE OF BRICK FROM SALVAGE BRICK.

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT

ARCHITECT/ENGINEER OF RECORD
THOMAS OLESAC, ARCHITECT
MS Lic # 5505
1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460

STAMP
03.10.2023

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
EXTERIOR ELEVATIONS
Approved:

Phase
CONSTRUCTION DOCUMENTS
FULLY SPRINKLERED

Project Title
RENOVATE BUILDING 1
Location
BILOXI, MISSISSIPPI
Issue Date
03/10/2023
Checked
LA
Drawn
CD,PC
Project Number
520-317X
Building Number
1
Drawing Number
AE202
Dwg. 84 of 238

A

B

C

D

E

F

A

B

C

D

E

F

EXTERIOR ELEVATIONS GENERAL NOTES


- CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS AND CONDITIONS
- UPON DISCOVERY OF ANY DISCREPANCIES BETWEEN DRAWINGS DEPICTING EXISTING CONDITIONS OR UPON DISCOVERY OF UNKNOWN CONDITIONS DETRIMENTAL TO THE COMPLETION OF THE WORK AS INDICATED IN THE DOCUMENTS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT & RESIDENT ENGINEER, IN WRITING, OF THE CONDITION IN QUESTION BEFORE PROCEEDING WITH WORK IN THE AREA.
- CONTRACTOR SHALL MAINTAIN SAFE METHODS OF EGRESS FOR OCCUPIED PORTIONS OF BUILDING AND IN SITE AREA DURING CONSTRUCTION.
- DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE ARCHITECT & RESIDENT ENGINEER BEFORE CONTINUING WITH THE CONSTRUCTION.
- COORDINATE WORK WITH OTHER PHASES
- COORDINATE SITE LAYOUT / ACCESS / WORK AREAS / LAYDOWN AREAS / PHASING WITH RESIDENT ENGINEER
- SEE SHEETS S402 AND S403 FOR CURTAINWALL / WINDOW OPENING TYPES AND ASSOCIATED WORK
- SEE SHEET AD701 - AD705 FOR PHOTOGRAPHS
- ALL MASONRY / STONE IS TO HAVE A WATER RESISTANCE COATING. MORTAR JOINTS ARE TO BE RETOOLLED, AS REQUIRED.
- ALL EIFS SYSTEM TO HAVE WATERPROOF COATING OVER INSULATION BOARD / FOAM SHAPE, BASE COAT AND PRIMER, WHERE REQUIRED
- BACKWRAP EIFS FOAM INSULATION BOARDS / SHAPE PER MANUFACTURER'S RECOMMENDATIONS
- ALL DIFFERING MATERIAL JOINTS TO HAVE BACKER ROD AND SEALANT INSTALLED
- INSTALL NEW GUTTERS AND DOWNSPOUTS. SEE ROOF PLAN ON SHEET AE105 FOR ADDITIONAL WORK NOT SHOWN. PROVIDE CONCRETE SPLASH BLOCKS AT ALL DOWNSPOUT LOCATIONS THAT SPLASH AT GRADE
- REMOVE ALL SIGNAGE IN AREAS OF WORK. PREDRILL HOLES FOR FASTENERS AND FILL WITH SEALANT PRIOR TO INSTALL FASTENER
- REINSTALL ALL ELECTRICAL, COMMUNICATIONS, SECURITY, ACCESS CONTROL, IN EXISTING LOCATIONS. PROVIDE WATERTIGHTNESS AT PENETRATIONS
- COLORS (SUBMIT WATERPROOF COATING, PAINT AND METAL COLORS TO BE APPROVED IN SHOP DRAWINGS PHASE BY ARCHITECT OR RESIDENT ENGINEER - COLORS TO MATCH EXISTING CAMPUS COLOR SCHEME):
 - BRICK (BELOW SECOND FLOOR STONE BANDING TO GRADE 0): LIGHT TAN
 - BRICK & NEW EIFS GABLE (ABOVE SECOND FLOOR STONE BANDING TO ROOF) MEDIUM TAN
 - STONE BANDING, SILLS, KEYSTONES, ETC: GRAY
 - EIFS (COLUMN, TRIM, FASCIA, CORNICE, ETC): WHITE
 - STOREFRONT, WINDOW UNITS AND ASSOCIATED FLASHING: WHITE
 - RAILINGS: BLACK
 - ROOF AND ROOF FLASHINGS: COLONIAL RED (MATCH EXISTING)
 - ROOF GUTTERS COLONIAL RED. ROOF DOWNSPOUTS TO MATCH ADJACENT WALL COLOR

ELEVATION LEGEND


- EXISTING TO REMAIN
- - - - - TO BE REMOVED
- (N) KEYNOTE

EXTERIOR ELEVATION KEYNOTES


- (A) NEW ALUMINUM CURTAINWALL INCLUDING FASTENER, BLOCKING, FLASHING, SEALANTS. SEE DETAILS FOR ADDITIONAL INFORMATION. SEE PLANS FOR CURTAINWALL TYPES.
- (B) NEW ALUMINUM WINDOW INCLUDING FASTENERS, BLOCKING, FLASHING, SEALANTS. SEE DETAILS FOR ADDITIONAL INFORMATION. SEE PLANS FOR WINDOW TYPES.
- (C) REINSTALL EXISTING SHUTTERS. PREDRILL HOLES FOR FASTENERS, CLEAN, AND FILL WITH SEALANT PRIOR TO INSTALLING FASTENERS. TYPICAL FOR NORTH ELEVATION.
- (D) REINSTALL REFINISHED RAILINGS. FILL ANY SOCKETS IN STONE WITH EPOXY. REMOVE BOTTOM OF POST IF APPLICABLE AND PROVIDE L-BRACKET TO FASTEN RAIL TO ADJACENT COLUMN.
- (E) INSTALL SILICONE ELASTOMERIC COATING OVER EIFS PILASTERS AND FASCIA. PROVIDE SUPPORTING LIGHT GAGE FRAMING, TRTD WOOD BLOCKING AND FLASHING.
- (F) INSTALL EIFS APPLIED CORNICES, TRIM AND PREFINISHED MTL FLASHING.
- (G) INSTALL EIFS ASSEMBLY. SEE DETAILS FOR EXTENT. ADJUST EXISTING THRU-WALL FLASHING TO COORDINATE WITH NEW WORK.
- (H) INSTALL EIFS APPLIED WINDOW TRIM. SEE WINDOW TYPES FOR ADDITIONAL INFORMATION.
- (J) PAINT EXISTING GUARD RAIL SYSTEM.
- (K) NEW LOUVER AND PREFINISHED MTL ON DORMERS. SEE ROOF PLAN - COORDINATE WITH MECH.
- (L) REINSTALL ACCESS CONTROL SYSTEM. PREDRILL HOLES FOR FASTENERS AND FILL WITH SEALANT TO INSTALLING FASTENERS.
- (M) REINSTALL LIGHT FIXTURE. PRE-DRILL HOLES FOR FASTENERS AND FILL WITH SEALANT PRIOR TO INSTALLING FASTENERS. PROVIDE GASKETS AT CONNECTION TO JUNCTION BOX.
- (N) REINSTALL SECURITY/COMMUNICATIONS FIXTURE FOR REINSTALLATION. PREDRILL HOLES FOR FASTENERS AND FILL WITH SEALANT PRIOR TO INSTALLING FASTENERS. PROVIDE GASKETS AT CONNECTION TO JUNCTION BOX. SEAL ALL HOLES IN MASONRY.
- (P) NOT USED.
- (Q) INSTALL NEW BACKER ROD AND SEALANT ALL AROUND EXISTING LOUVER.
- (R) INSTALL APPLIED GRATE OVER EXISTING FOUNDATION VENT HOLES. RECONNECT UTILITIES AS REQUIRED.
- (S) CLEAN EXISTING DOOR FINISHES. INSTALL NEW SEALANT AND BACKER RODS ALL AROUND. INSTALL GASKETS ALL AROUND.
- (T) INSTALL WATERPROOFING SILICONE ELASTOMERIC COATING OVER EIFS PILASTERS AND FASCIA. PROVIDE SUPPORTING LIGHT GAGE FRAMING, TRTD WOOD BLOCKING AND FLASHING.
- (U) INSTALL NEW ALUMINUM EXPANSION JOINT ASSEMBLY AND COVER AT CONNECTIONS BETWEEN BUILDING 1 AND BUILDING 53 AT NORTH AND SOUTH ELEVATIONS. REFER TO SPEC SECTION 07 95 13 (EXPANSION JOINT COVER ASSEMBLY) FOR ADDITIONAL INFORMATION.
- (V) REPAIR METAL COLUMNS AT 5TH FLOOR FACADE: SANDBLAST, REWELOD BASES, AND REPAINT AT ALL COLUMNS.
- (W) PROVIDE MORTAR JOINT REPAIR/REPLACEMENT TO EXISTING BRICK. PAINT EXISTING MASONRY/BRICK AND INSTALL SILICONE ELASTOMERIC COATING.
- (X) APPLY UV FILM AT INTERIOR OF THIS WINDOW. REFER TO SPEC SECTION 08 85 00 (GLAZING) FOR ADDITIONAL INFORMATION.
- (Y) EXISTING MECHANICAL EXHAUST.
- (Z) MECHANICAL EXHAUST.
- (Z1) REBUILD OUTER WYTHE OF BRICK FROM SALVAGE BRICK.

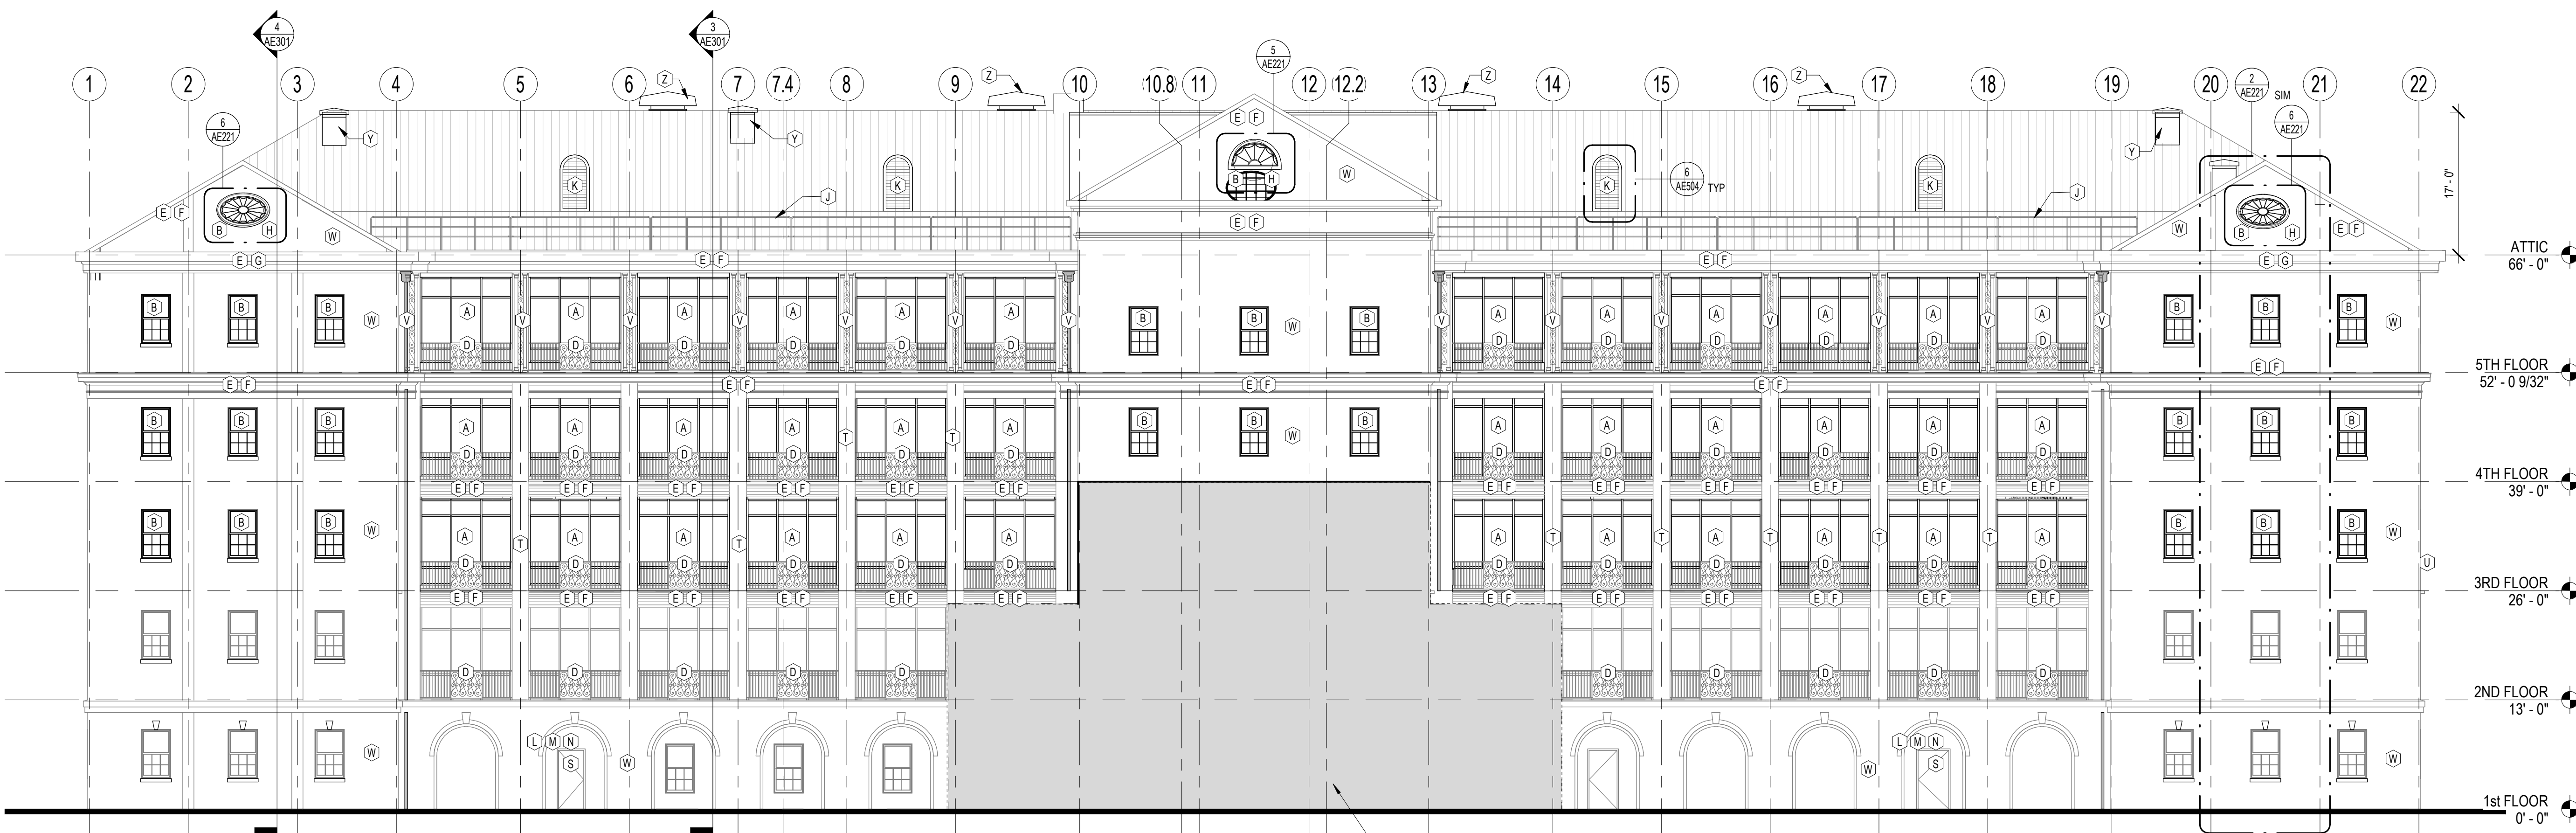

1 SOUTH EXTERIOR ELEVATION
AE203 3/32" = 1'-0"

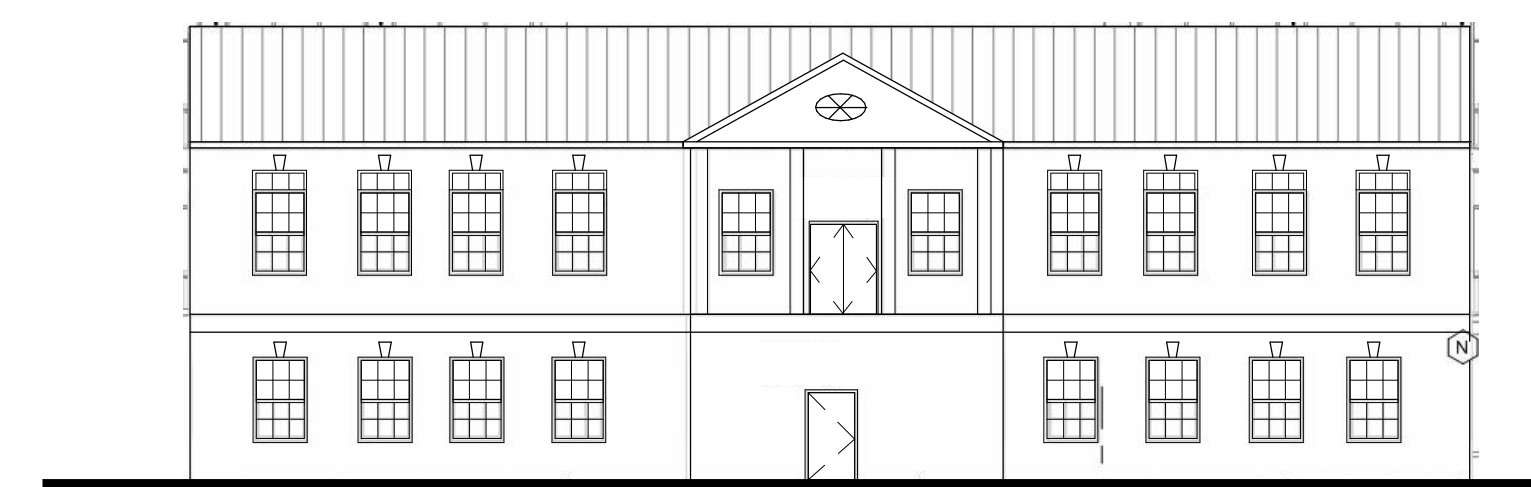

3 SOUTH ELEVATION
AE203 3/32" = 1'-0"

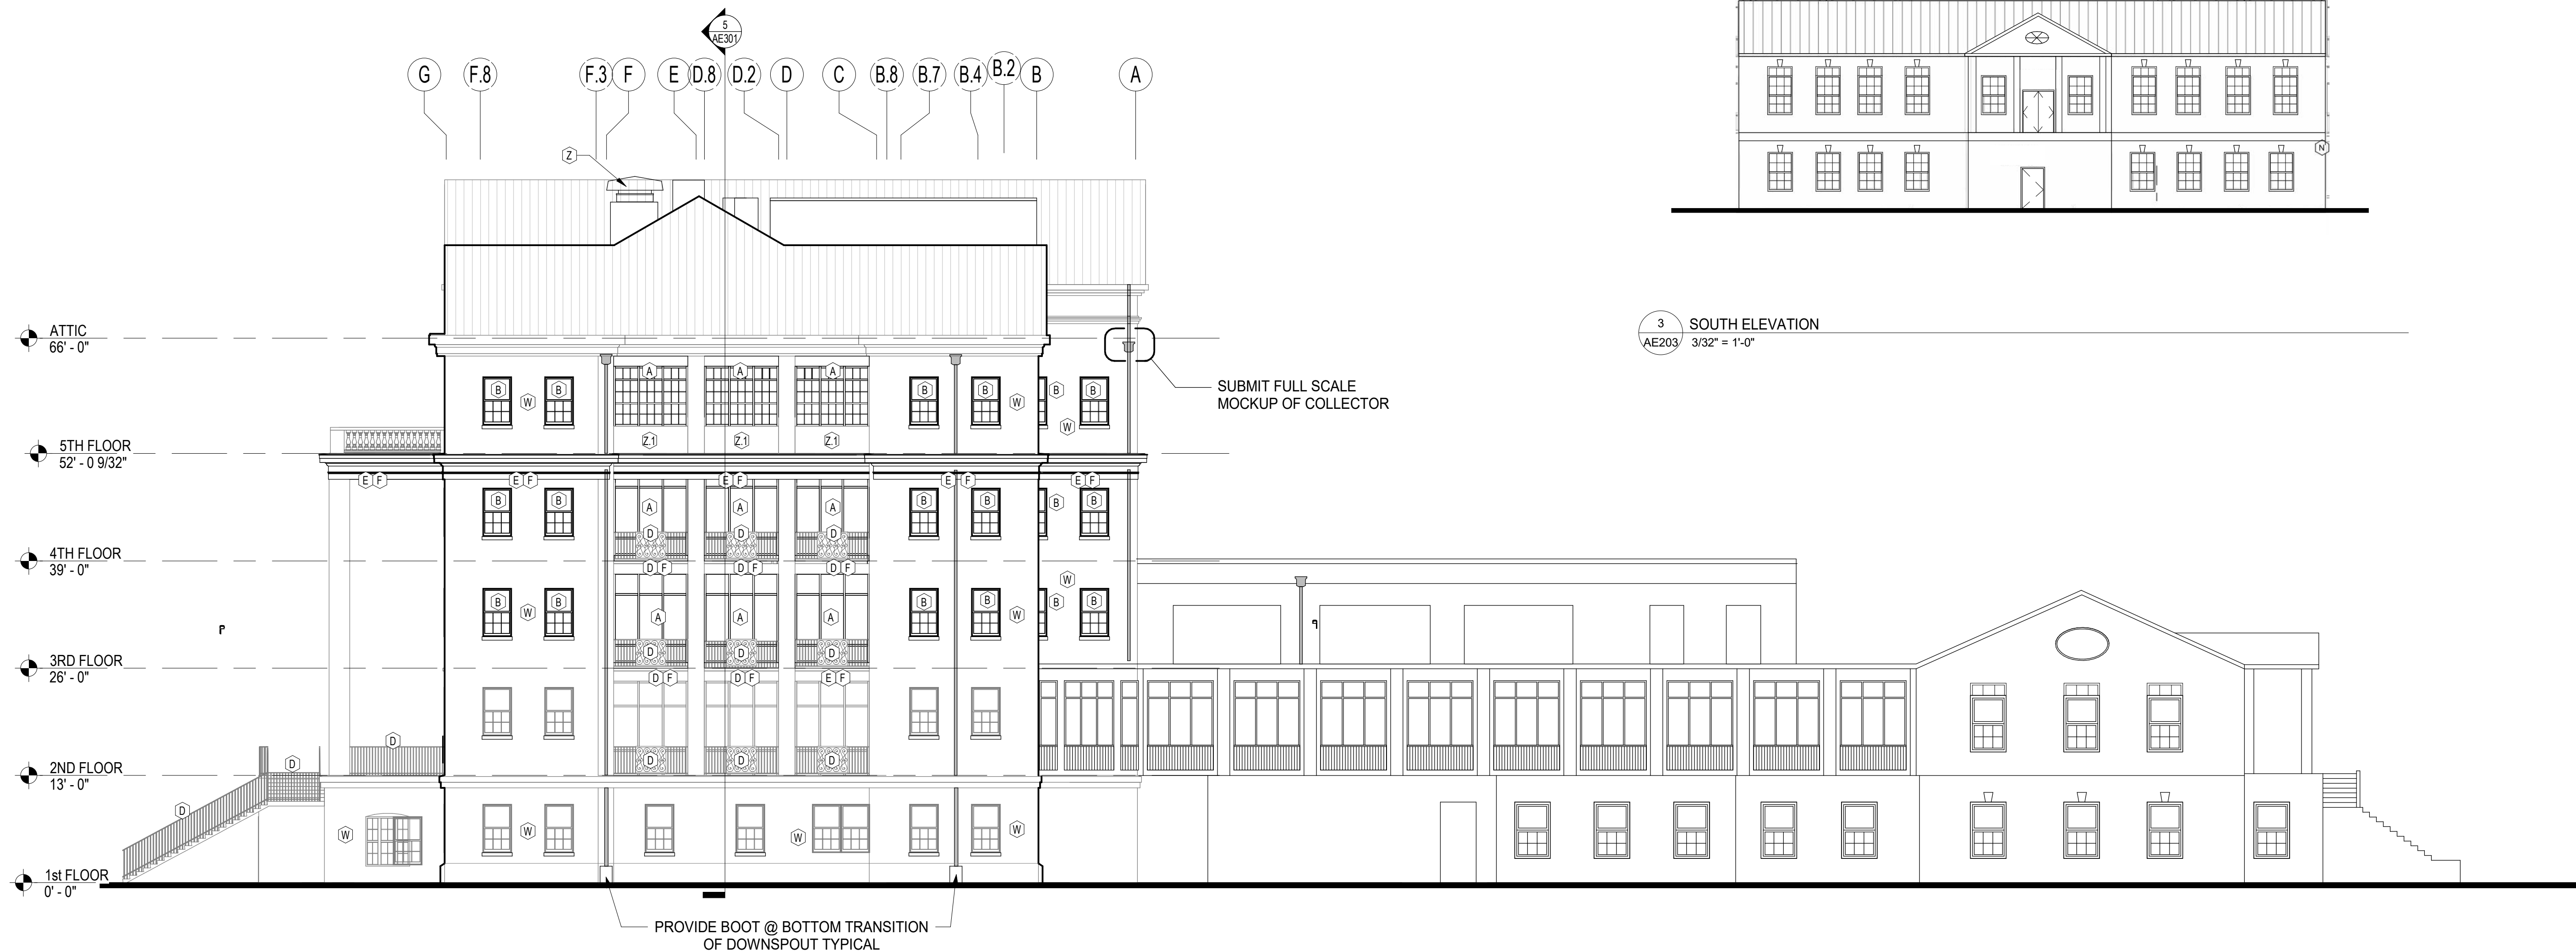


2 WEST EXTERIOR ELEVATION
AE203 3/32" = 1'-0"

BID DOCUMENTS

NO.	REVISIONS	DATE

CONSULTANT	ARCHITECT/ENGINEER OF RECORD THOMAS OLESAK, ARCHITECT MS Lic # 5505 1050 HOYT AVE WEST ST PAUL, MN 55117 952-451-0460	STAMP 	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title EXTERIOR ELEVATIONS Approved: _____	Phase CONSTRUCTION DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE BUILDING 1	Project Number 520-317X Building Number 1	Location BILOXI, MISSISSIPPI	Issue Date 03/10/2023	Checked LA	Drawn CD,PC	Drawing Number AE203 Dwg. 85 of 238
------------	--	--	---	--	--	---	--	--	---------------------------------	----------------------	-----------------------	--

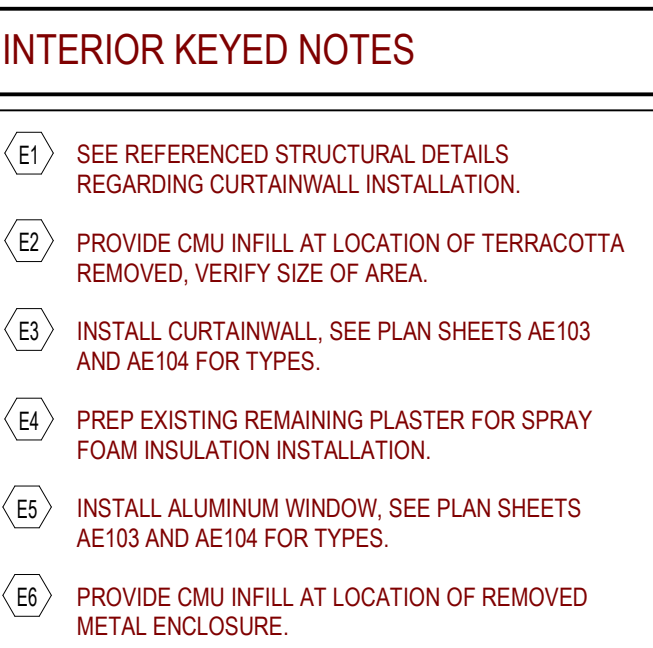
[illegible]





PC, CZ Dwq. 86 of 238

1050 HOYT AVE WEST ST PAUL, MN 55117
952-451-0460



VA | U.S. Department
of Veterans
Affairs

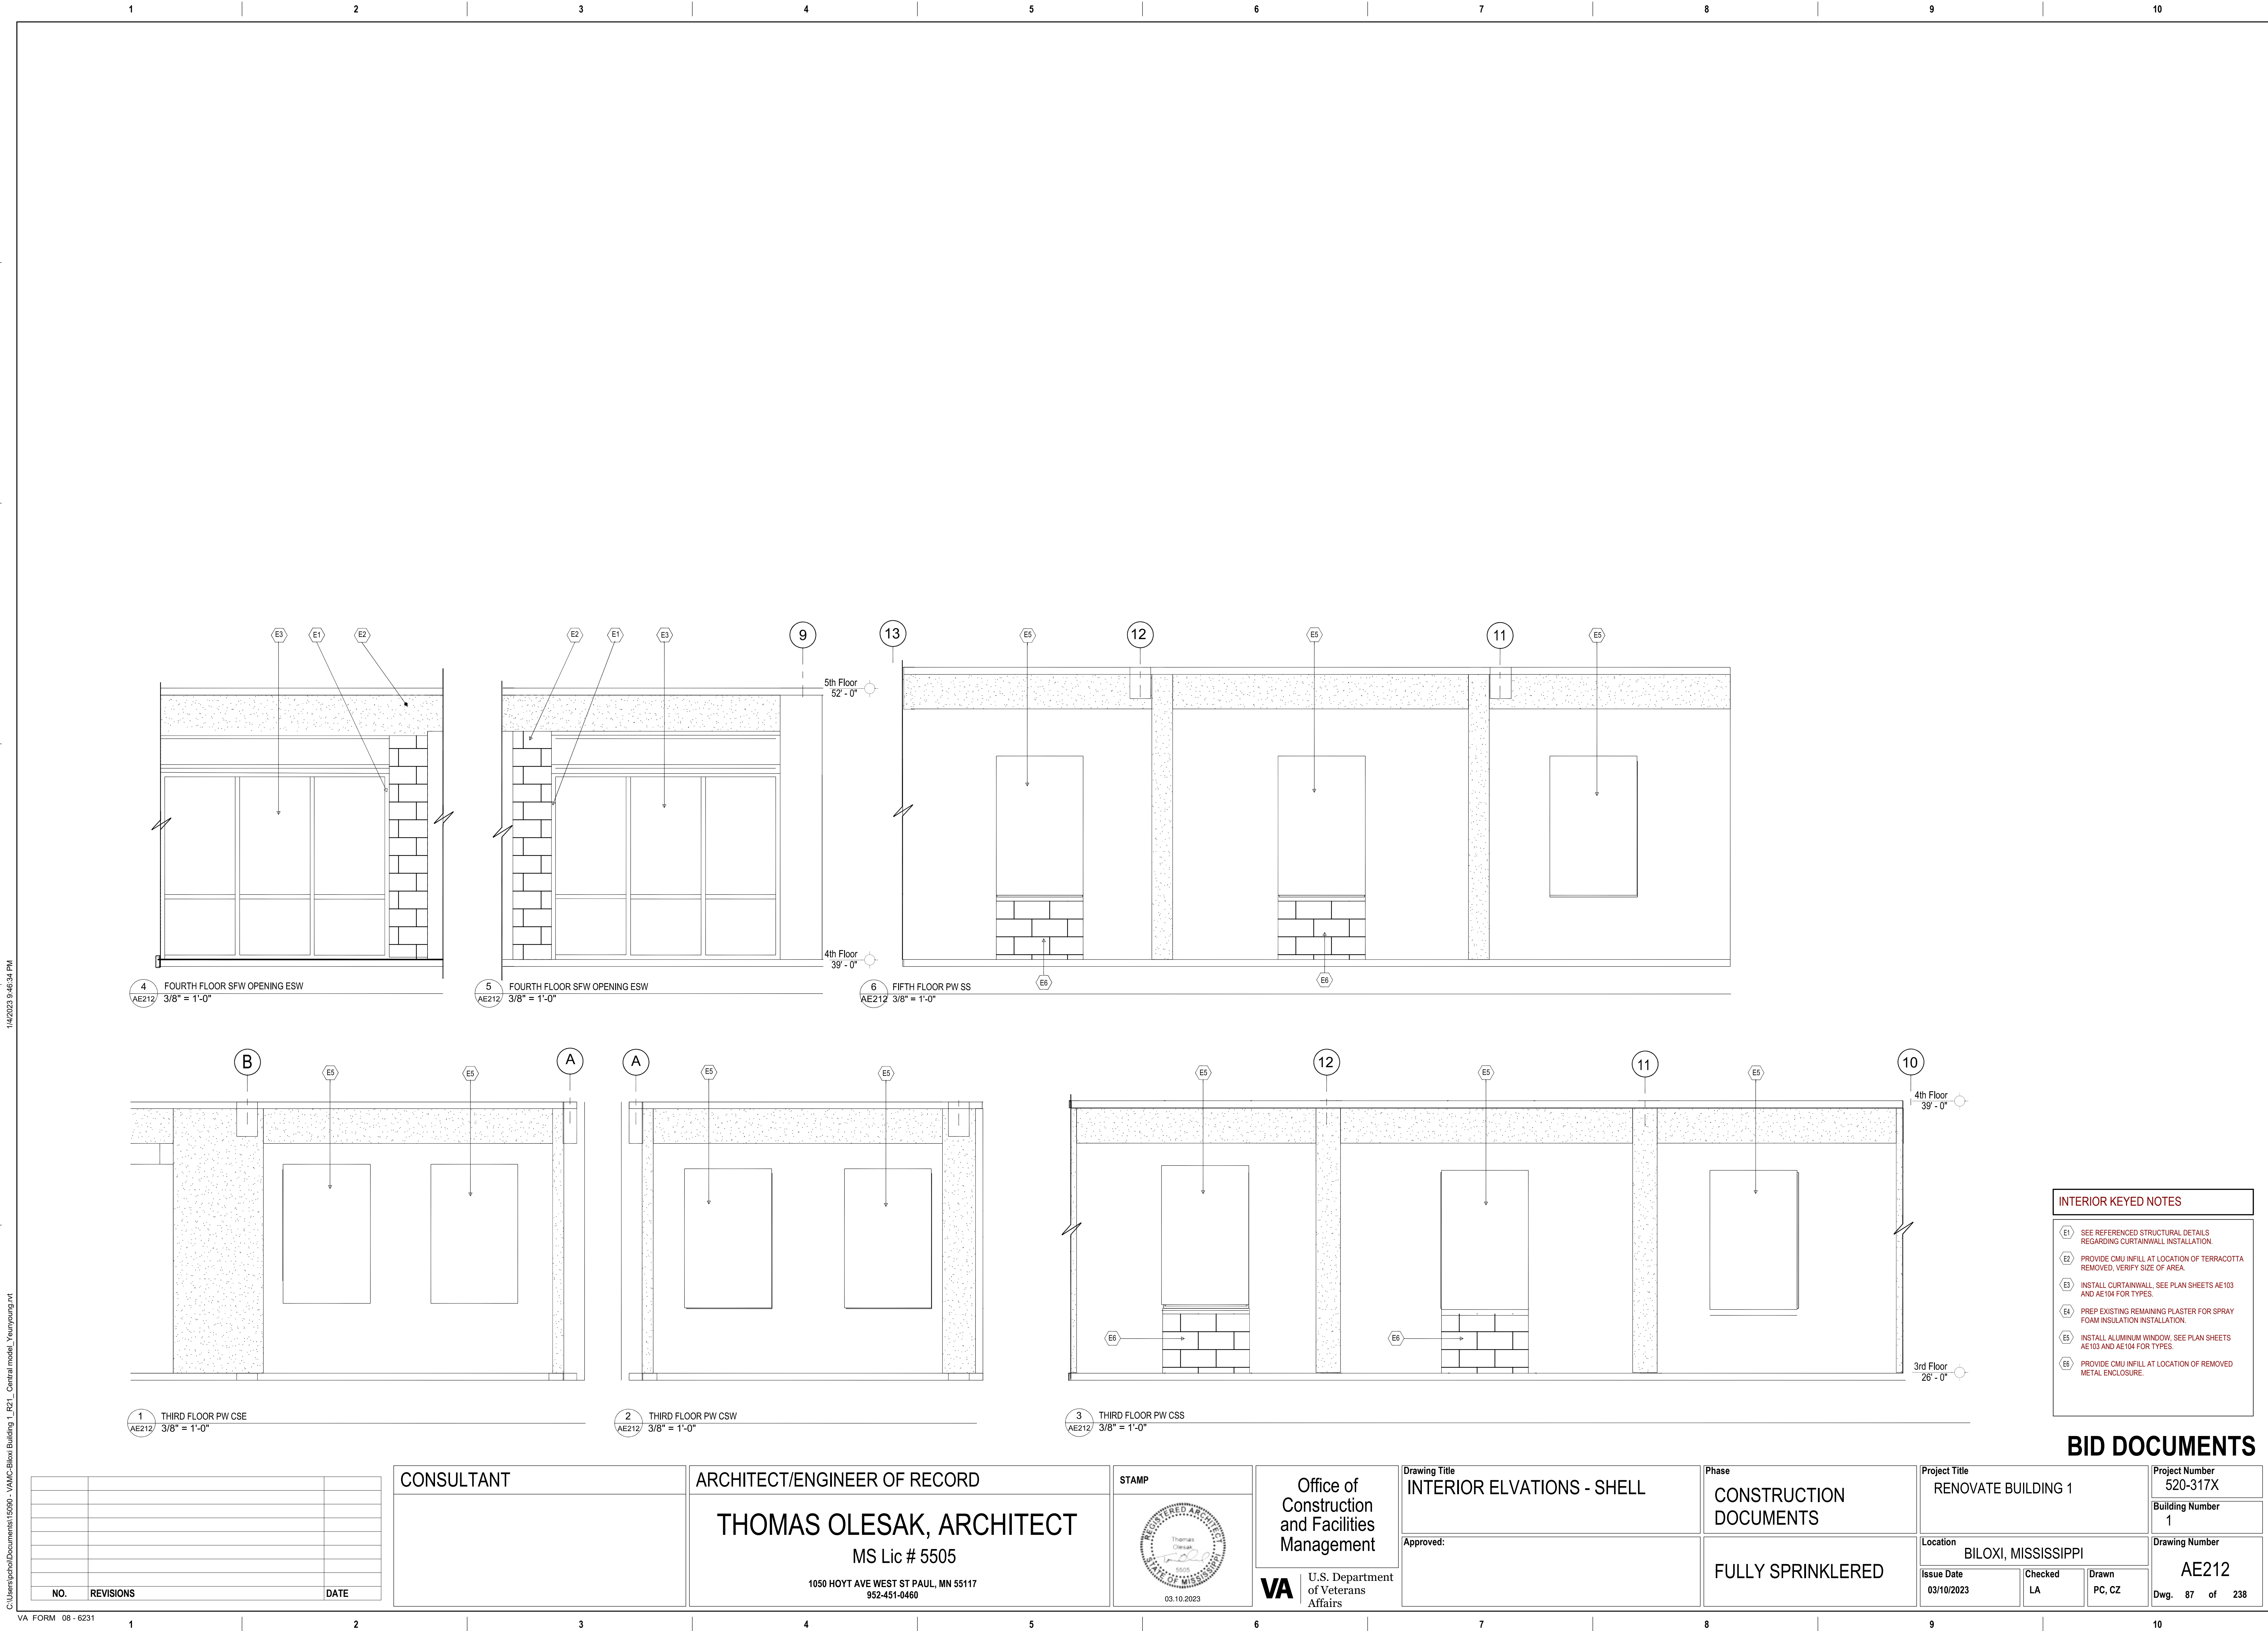

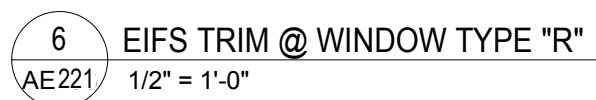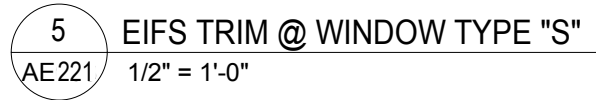[illegible]

Page 88 of 238